

Lovekin Creek, Bouchette Point Creek and Port Granby Creek Background Report: Abiotic, Biotic and Cultural Features

*for preparation of the Lovekin Creek, Bouchette Point
Creek and Port Granby Creek Watershed Plan*

October 2009



Prepared by Ganaraska Region Conservation Authority



The Lovekin Creek, Bouchette Point Creek and Port Granby Creek Background Report: Abiotic, Biotic and Cultural Features was written to document the historical and current conditions of the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds. This document creates the foundation of the Lovekin Creek, Bouchette Point Creek and Port Granby Creek Watershed Plan. The Ganaraska Region Conservation Authority would like to thank the many seasonal staff that provided field assistance and the landowners who granted permission to collect data from their property.

This document was written by Ganaraska Region Conservation Authority (GRCA) staff members Pam Lancaster, B.Sc., Jenny Dai, M.Eng., Brian Morrison, B.Sc., Mark Peacock, P.Eng., Mike Smith, B.Sc., Ken Towle, M.E.S., and Magdi Widaatalla, M.Sc., P.Geo. for the resident communities, municipalities and stakeholders of the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds. Maps were created by the GRCA GIS Department, Steve Nowak, B.A., Brian Curran, B.Sc. and Jeff Moxley. This document represents the first of its kind for the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds. Certain sections of this report have been summarized from peer reviewed or consultant documents, and review and input into this document by committee members, stakeholders and residents has occurred in 2009.

The Ganaraska Region Conservation Authority envisions that this document will serve to aid in the conservation, enhancement and sustainable management of the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds and its resources.

Correct citation for this document:

Ganaraska Region Conservation Authority. 2009. Lovekin Creek, Bouchette Point Creek and Port Granby Creek Background Report: Abiotic, Biotic and Cultural Features. Ganaraska Region Conservation Authority. Port Hope, Ontario.

The Lovekin Creek, Bouchette Point Creek and Port Granby Creek Background Report: Abiotic, Biotic and Cultural Features Executive Summary

The Lovekin Creek, Bouchette Point Creek and Port Granby Creek Background Report: Abiotic, Biotic and Cultural Features documents historic and current conditions of these three watersheds and the regional study area. This document creates the foundation for the Lovekin Creek, Bouchette Point Creek and Port Granby Creek Watershed Plan. It is envisioned that the Background Report and the forthcoming Watershed Plan will serve to aid in the conservation, enhancement and sustainable management of these Lake Ontario watersheds and related resources.

The Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds are located in Ward 4, Municipality of Clarington, and Ward 2, Municipality of Port Hope (Figure 1). Historic events have shaped these watersheds into present-day condition. Most notable are the effects on settlement patterns caused by the location of road and rail corridors. Today, these watersheds support a population of approximately 1,300 people, a productive agriculture community, and a mix of natural resources and recreational uses. In addition, residents depend on water from these local watersheds for domestic and economic use, although the residents in Newtonville rely on Lake Ontario for its source of water.

Shaped thousands of years ago by glacial activity, the regional study area lies on Paleozoic bedrock and its topographic and hydrogeological features are all contained in the Iroquois Plain physiographic region. Corresponding surficial geology and soils help dictate where groundwater flows, where aquifers lie, and where groundwater is recharged and discharged (Figures 2 and 3).

Bouchette Point Creek watershed is the largest at 23 square kilometers (km²), followed by Port Granby Creek watershed at 13 km², and Lovekin Creek watershed at 7 km². Protection of these watersheds has been influenced by surface water studies such as floodplain mapping and hydraulic studies. Regulations are also in place to protect people and property from flood waters, and to protect some of the natural features of the watershed.

Surface water quality as a whole is generally good, with only localized problems. Physical parameters (dissolved oxygen, pH, conductivity and alkalinity) indicate that surface water can be resilient to acidification, eutrophication and chemical additions. Chloride when sampled during the summer is low. Nutrients such as total phosphorus and nitrite-N can be considered the surface water quality parameter most capable of fluctuating beyond recommended guidelines, however exceedances maybe related to runoff from storm events or land use. Groundwater quality data is limited in the watersheds.

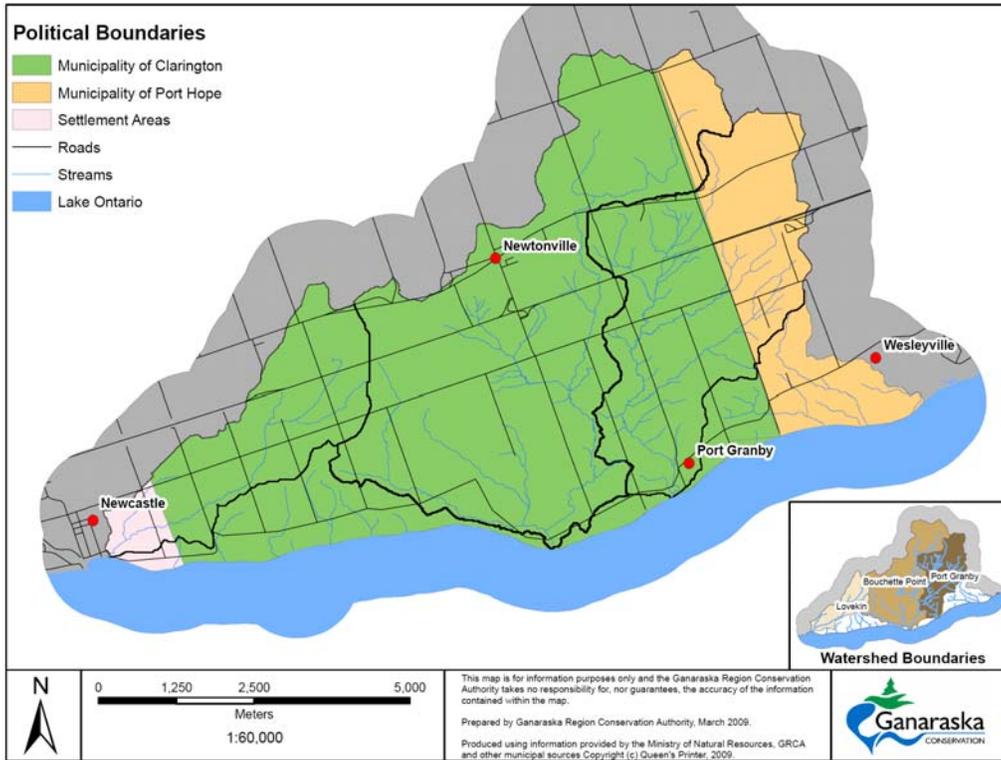


Figure 1: Watershed planning area

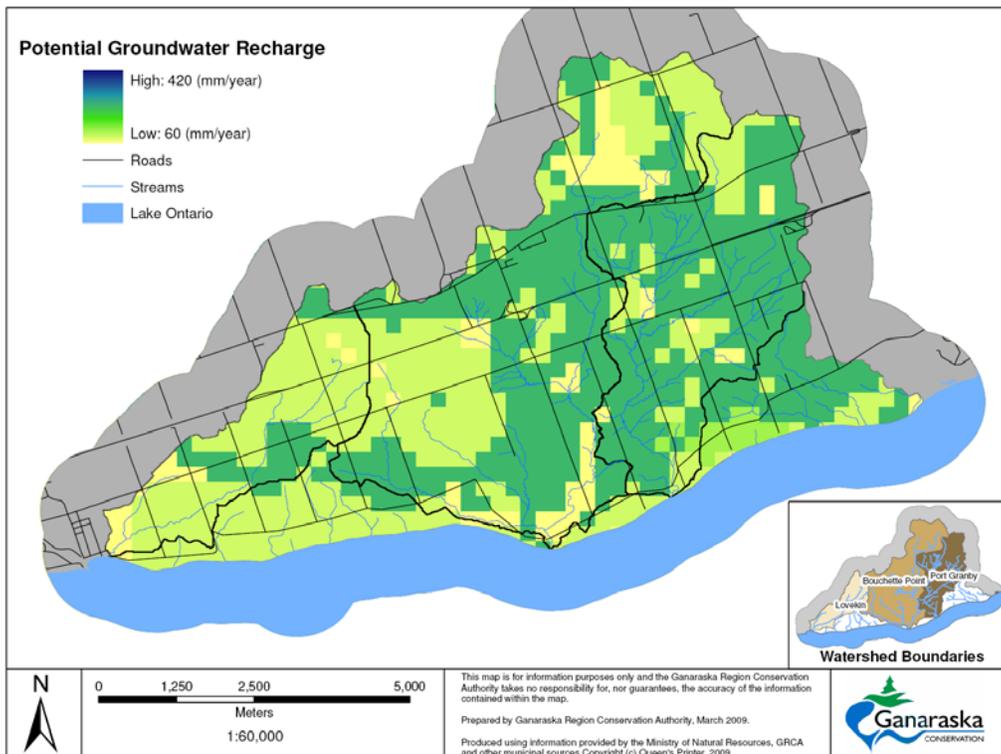


Figure 2: Potential groundwater recharge

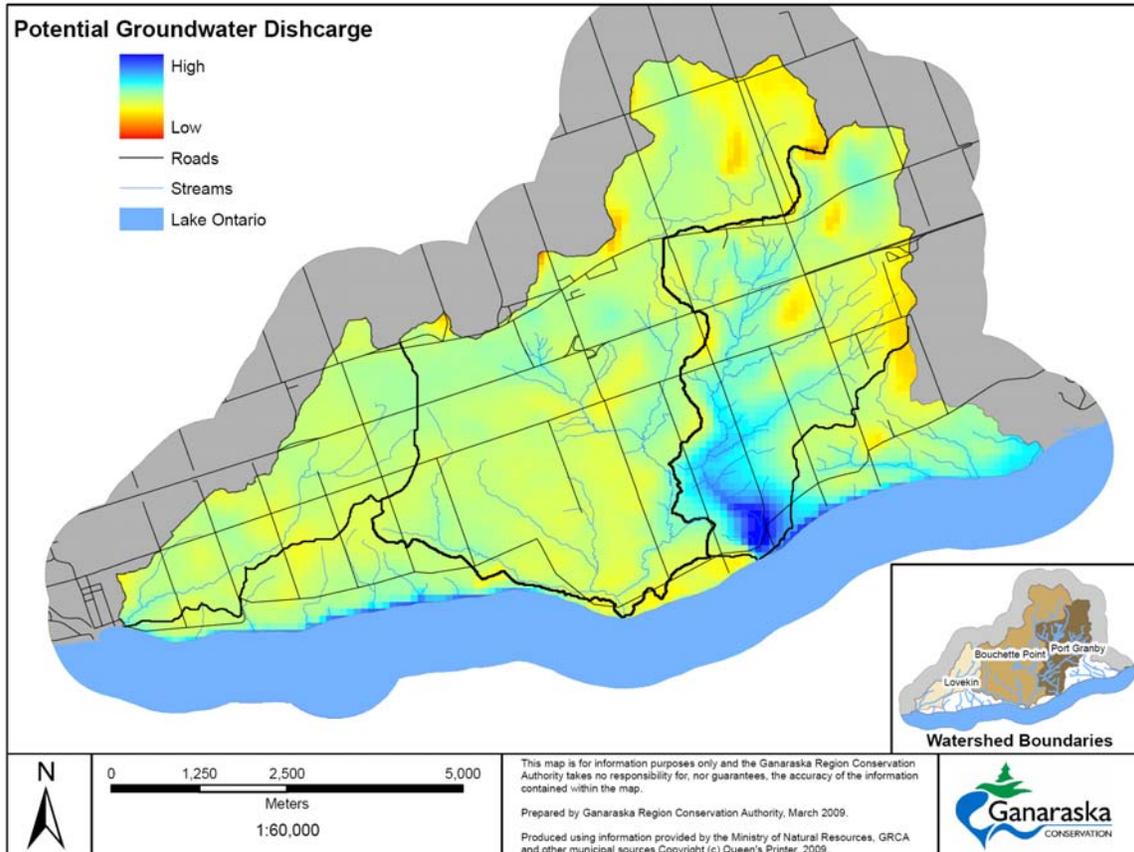


Figure 3: Potential groundwater discharge

A total of 20 species of fish have been sampled in the three watersheds. Of these, two (10%) of the species are not native to the Lake Ontario basin. Stream quality based on Steedman's IBI (Figure 4.) showed six sites being good (50%), six fair (50%), and zero excellent or poor sites.

The terrestrial natural habitat of the regional study area includes forest, meadows and wetlands (Figure 5). Forest cover, which also includes treed wetlands, occur the most in the Bouchette Point Creek watershed (30%), followed closely by the Lovekin Creek watershed (29%) and the Port Granby Creek watershed (21%). In the entire regional study area forest cover accounts for 24% of the landscape. Therefore forest cover is generally below the commonly used guideline of 30%. In addition, much of these natural heritage features are in private ownership. Indicator species such as birds and frogs can indicate the health of forest and wetland habitats. Numerous Species at Risk may inhabit the regional study area and therefore should be considered in management planning. Invasive species such as Dog-strangling Vine (*Cynanchum rossicum*), European Buckthorn (*Rhamnus cathartica*), and Garlic Mustard (*Alliaria petiolata*) pose a threat to terrestrial habitat health.

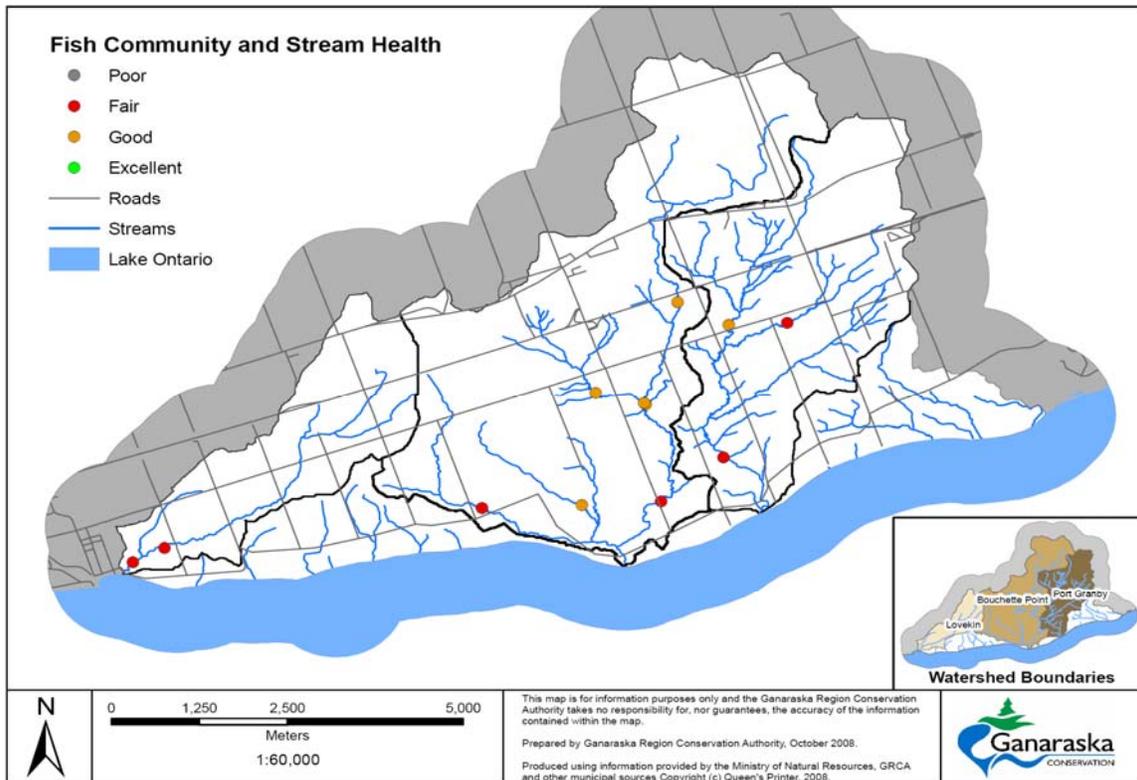


Figure 4: Stream quality based on Steedman's Index of Biotic Integrity

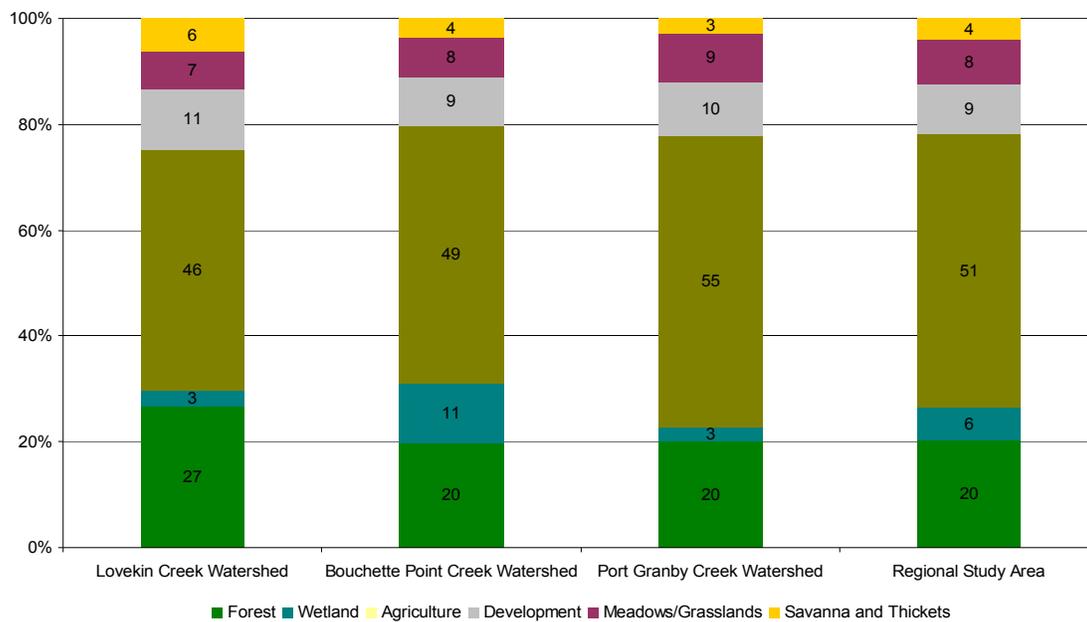


Figure 5: Land cover based on ecological land classification

The Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds are not only an important environmental feature to the communities of the Municipality of Clarington and Municipality of Port Hope; they also play an important role in a larger context. For example these watersheds contribute to the health and resources of Lake Ontario, which provides drinking water for thousands of Ontario residents. However, these watersheds have the potential to be influenced by future stresses such as climate change.

The Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds are recognized for their aquatic habitat, terrestrial natural heritage, and recreational opportunities. In addition, the watershed provides drinking water to the majority of watershed residents. The development of a watershed plan will aim to conserve and sustainably manage the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds and the drainage areas in-between for current and future generations.

Table of Contents

Chapter 1 - Introduction	1
1.0 Lovekin Creek, Bouchette Point Creek and Port Granby Creek Watershed Plan	1
1.0.1 Watershed Planning Process	1
1.0.2 Watershed Planning Study Area	4
1.0.3 Fish Habitat Management Plan	5
1.0.4 Port Granby Project.....	5
1.0.5 Lake Ontario Shoreline.....	8
Chapter 2 – History	9
2.0 Cultural History	10
2.0.1 Settlement	10
2.0.4 Changing Landscape	11
Chapter 3 - Abiotic Features	13
3.0 Regional Climate	14
3.1 Geologic Characteristics.....	20
3.1.1 Bedrock	20
3.1.2 Glacial Depositions.....	20
Scarborough Formation or Equivalent.....	25
Port Hope Till (Lower Glacial Unit)	25
Clarke Deposits or Equivalent	25
Bowmanville Till (Middle Glacial Unit).....	25
Late Stage Sediments (Glacial/Fluvial).....	26
3.1.3 Topography	26
3.1.4 Physiographic Regions.....	27
3.1.5 Surficial Geology	27
3.1.6 Soils	28
3.2 Groundwater.....	31
3.2.1 Aquifers and Groundwater Flow	31
3.2.2 Groundwater and Surface Water Interactions	34
Groundwater Recharge and Discharge	34
Significant Groundwater Recharge Areas	36
Baseflow	39
3.3 Groundwater Analysis	43
3.3.1 Groundwater Vulnerability	43

3.4 Surface Water	45
3.4.1 Drainage Basin Characteristics	46
3.4.2 Dams and Water Control Structures.....	47
3.4.3 Stream Gauge Stations	47
3.4.4 Ontario Low Water Response	48
3.5 Surface Water Analysis	50
3.5.1 Surface Water Hydrology	50
3.5.2 Hydraulics Analysis	50
Flood Flows	50
Floodplain Analysis.....	51
3.5.3 Natural Hazards	52
General Objectives of Hazard Lines	53
Provincial Policy Statement	54
Hazard Types and Limits.....	54
3.5.4 Water Budget and Stress Assessment.....	59
Water Budget Equations and Components	60
Stress Assessment Methodology	61
Water Demand Estimation.....	64
Water Reserve Estimation.....	68
Stress Assessment Calculation	69
Uncertainty	71
Water Budget Results.....	72
Stress Assessment.....	82
Water Budget and Stress Assessment Summary.....	82
3.6 Groundwater Quality	99
3.6.1 Groundwater Quality in Private Water Supply Wells	99
3.7 Surface Water Quality	100
3.7.1 Methods.....	101
Surface Water Quality Data Sets.....	101
Water Quality Sampling Methods	103
Surface Water Quality Guidelines	104
Statistical Analysis.....	104
3.7.2 Ganaraska Region Water Quality Monitoring Network Results	104
Physical Parameters.....	105
Chloride	106
Nutrients	106
Bacteria	107
3.7.3 Baseflow Water Quality Monitoring Program Results.....	107
3.7.4 Discussion of Surface Water Quality	110
Physical Parameters.....	110
Chloride	111
Nutrients	111
Bacteria	112

Chapter 4 - Biotic Features	114
4.0 Aquatic Resources	115
4.0.1 Fisheries.....	115
Fisheries Analysis.....	115
Fisheries Results	115
4.0.2 In-stream Habitat.....	122
4.0.3 Surface Water Temperature	125
4.0.4 Benthic Macroinvertebrates.....	127
Benthic Macroinvertebrates Sampling Methods	128
Benthic Macroinvertebrates as Indicators.....	129
4.0.5 Riparian Areas.....	130
4.1 Terrestrial Natural Heritage.....	133
4.1.1 Terrestrial Natural Heritage Study Methods	133
4.1.2 Forests	135
4.1.3 Grasslands and Thickets	141
4.1.4 Wetlands	142
4.1.5 Species at Risk and Species of Concern	146
4.1.6 Invasive Species	148
4.1.7 Areas of Natural and Scientific Interest	148
Newtonville Swamp and Bog.....	149
Clarke Summit Wetland Complex (PSW)	149
Bond Head Bluffs	149
Port Granby East Bluffs and Ravine	149
Chapter 5 – Cultural Characteristics	151
5.1 Present Cultural Characteristics	152
5.1.1 Municipal Populations and Growth	152
5.1.2 Industrial and Commercial Sector Distribution.....	154
5.1.3 Agriculture	157
Agricultural Land.....	157
Crops and Livestock	158
Agricultural Conservation Measures.....	159
5.1.4 Infrastructure	159
Transportation and Transmission Line Corridors.....	160
Winter Road Maintenance	161
Landfills	161
Municipal and Private Water and Wastewater Services	162
Stormwater Management	163
5.1.5 Natural Resources and Uses.....	164
Aggregate Extraction, Oil and Gas	164
Forestry	164
5.1.6 Conservation Areas	166
5.1.7 Green Spaces	166

Chapter 6 - Provincial Consideration	167
6.0 Potential Climate Change Effects	168
6.1 Drinking Water Source Protection	172
6.2 Lake Ontario	174
7.0 References.....	177
Acronyms and Glossary.....	185

Figures

Figure 1.0: Ganaraska Region Conservation Authority	2
Figure 1.1: Watershed management phases and watershed planning steps.....	3
Figure 1.2: Watershed planning area.....	4
Figure 1.3: Draft end use concept of the Port Granby Project	7
Figure 2.0: Post settlement events.....	12
Figure 3.0: Hydrologic cycle.....	14
Figure 3.1: Climate stations	16
Figure 3.2: Precipitation distribution.....	17
Figure 3.3: Cobourg STP meteorological station (6151689), 1970 to 2003	19
Figure 3.4: Peterborough, Trent University meteorological station (6151689), 1968 to 2000	19
Figure 3.5: Bedrock elevation	21
Figure 3.6: Cross-section location.....	23
Figure 3.7: Cross-section A – A'	24
Figure 3.8: Ground surface topography	26
Figure 3.9: Surficial geology	28
Figure 3.10: Soils	30
Figure 3.11: Hydrologic soils group.....	30
Figure 3.12: Simulated watertable	32
Figure 3.13: Water well types	33
Figure 3.14: Potential groundwater recharge.....	35
Figure 3.15: Overburden thickness.....	35
Figure 3.16: Potential groundwater discharge	36
Figure 3.17: Significant groundwater recharge areas	38
Figure 3.18: Net discharge per unit length.....	41
Figure 3.19: Net discharge per unit area.....	42
Figure 3.20: Groundwater vulnerability	45
Figure 3.21: Stream order.....	47
Figure 3.22: Dams and water control structures	48
Figure 3.23: Floodplain study area.....	52
Figure 3.24: Regulated areas	54
Figure 3.25: Watercourse cross-section with a Regulatory Floodline	55
Figure 3.26: Plan view of a watercourse with a Regulatory Floodline.....	55
Figure 3.27: Watercourse cross-section with Toe Erosion Allowance.....	56
Figure 3.28: Plan view of watercourse with Toe Erosion Allowance	56
Figure 3.29: Stable Slope Allowance	57
Figure 3.30: Erosion Hazard Limit (for a confined system)	57
Figure 3.31: Erosion Hazard Limit (for an unconfined system)	58
Figure 3.32: Future land use.....	63
Figure 3.33: Permit to Take Water.....	67
Figure 3.34: Lovekin Creek under existing land use scenario.....	73
Figure 3.35: Bouchette Point Creek under existing land use scenario.....	74
Figure 3.36: Port Granby Creek under existing land use scenario.....	75
Figure 3.37: Lovekin Creek under future land use scenario.....	76

Figure 3.38: Bouchette Point Creek under future land use scenario.....	77
Figure 3.39: Port Granby Creek under future land use scenario.....	78
Figure 3.40: Lovekin Creek under future land use scenario with climate change.....	79
Figure 3.41: Bouchette Point Creek under future land use scenario with climate change.....	80
Figure 3.42: Port Granby Creek under future land use scenario with climate change.....	81
Figure 3.43: Ganaraska Region Water Quality Monitoring Network sites	102
Figure 3.44: Baseflow water quality sites.....	103
Figure 4.0: Stream quality based on Steedman’s Index of Biotic Integrity	117
Figure 4.1: Juvenile Rainbow Trout summer presence/absence	118
Figure 4.2: Brook Trout summer presence/absence	118
Figure 4.3: Eastern Blacknose Dace summer presence/absence	119
Figure 4.4: Longnose Dace summer presence/absence.....	119
Figure 4.5: Mottled Sculpin summer presence/absence	120
Figure 4.6: White Sucker summer presence/absence	121
Figure 4.7: Johnny Darter summer presence/absence	121
Figure 4.8: Creek Chub summer presence/absence.....	122
Figure 4.9: Stream habitat sampling sites.....	123
Figure 4.10: Substrate composition	124
Figure 4.11: Dominate substrates (D ₅₀)	124
Figure 4.12: Summer water temperature	126
Figure 4.13: River continuum concept	128
Figure 4.14: Hilsenhoff index of benthic macroinvertebrates	130
Figure 4.15: Riparian area functions.....	131
Figure 4.16: Fifty meter riparian area.....	132
Figure 4.17: Land cover based on ecological land classification	133
Figure 4.18: Forests.....	136
Figure 4.19: Forest Interior	139
Figure 4.20: Wetlands.....	144
Figure 4.21: Areas of Natural and Scientific Interest.....	150
Figure 5.0: Municipalities	153
Figure 5.1: Land use in the Municipality of Port Hope	155
Figure 5.2: Land use in the Municipality of Clarington	156
Figure 5.3: Agricultural land	158
Figure 5.4: Transportation routes.....	160
Figure 5.5: Water services	162
Figure 5.6: Private water wells.....	163
Figure 5.7: Potential aggregate resource areas	165
Figure 6.0: Annual Canadian temperature departures and long-term trend, 1948 to 2005.....	169
Figure 6.1: Annual average air temperature at the Cobourg STP Environment Canada Station, 1973 to 2005	170
Figure 6.2: Great Lakes drainage basin.....	175
Figure 6.3: Lake Ontario drainage basin.....	175

Tables

Table 3.0: GRCA-operated climate stations.....	15
Table 3.1: Precipitation and temperature data summary	18
Table 3.2: Geologic units in order of youngest to oldest deposition	21
Table 3.3: Surficial geology.....	27
Table 3.4: Hydrologic Soils Group	29
Table 3.5: Drainage areas	46
Table 3.6: Summary of threshold levels for low water response	49
Table 3.7: Summary of Flood Flows	51
Table 3.8: GIS layer sources used for surface water budget	61
Table 3.9: Permits to Take Water	66
Table 3.10: Existing serviced and non-serviced residential water use	67
Table 3.11: Surface water non-permitted agricultural water use (m ³)	68
Table 3.12: Surface water stress thresholds	70
Table 3.13: Groundwater stress thresholds	71
Table 3.14: Lovekin Creek under existing land use scenario	73
Table 3.15: Bouchette Point Creek under existing land use scenario	74
Table 3.16: Port Granby Creek under existing land use scenario	75
Table 3.17: Lovekin Creek under future land use scenario.....	76
Table 3.18: Bouchette Point Creek under future land use scenario	77
Table 3.19: Port Granby Creek under future land use scenario.....	78
Table 3.20: Lovekin Creek under future land use scenario with climate change	79
Table 3.21: Bouchette Point Creek under future land use scenario with climate change	80
Table 3.22: Port Granby Creek under future land use scenario with climate change	81
Table 3.23: Water demand summary for existing scenario (m ³)	82
Table 3.24: Lovekin Creek watershed existing water demand estimation.....	84
Table 3.25: Lovekin Creek watershed future water demand estimation.....	85
Table 3.26: Lovekin Creek watershed surface water stress calculation (existing scenario).....	86
Table 3.27: Lovekin Creek watershed surface water stress calculation (future scenario).....	86
Table 3.28: Lovekin Creek watershed surface water stress calculation (future scenario with climate change).....	87
Table 3.29: Lovekin Creek watershed groundwater stress calculation (existing scenario).....	87
Table 3.30: Lovekin Creek watershed groundwater stress calculation (future scenario).....	88
Table 3.31: Lovekin Creek watershed groundwater stress calculation (future scenario with climate change).....	88
Table 3.32: Bouchette Point Creek watershed existing water demand estimation	89
Table 3.33: Bouchette Point Creek watershed future water demand estimation.	90

Table 3.34: Bouchette Point Creek watershed surface water stress calculation (existing scenario).....	91
Table 3.35: Bouchette Point Creek watershed surface water stress calculation (future scenario).....	91
Table 3.36: Bouchette Point Creek watershed surface water stress calculation (future scenario with climate change).....	92
Table 3.37: Bouchette Point Creek watershed groundwater stress calculation (existing scenario).....	92
Table 3.38: Bouchette Point Creek watershed groundwater stress calculation (future scenario).....	93
Table 3.39: Bouchette Point Creek watershed groundwater stress calculation (future scenario with climate change).....	93
Table 3.40: Port Granby Creek watershed existing water demand estimation....	94
Table 3.41: Port Granby Creek watershed future water demand estimation.....	95
Table 3.42: Port Granby Creek watershed surface water stress calculation (existing scenario).....	96
Table 3.43: Port Granby Creek watershed surface water stress calculation (future scenario).....	96
Table 3.44: Port Granby Creek watershed surface water stress calculation (future scenario with climate change).....	97
Table 3.45: Port Granby Creek watershed groundwater stress calculation (existing scenario).....	97
Table 3.46: Port Granby Creek watershed groundwater stress calculation (future scenario).....	98
Table 3.47: Port Granby Creek watershed groundwater stress calculation (future scenario with climate change).....	98
Table 3.48: Locations and sampling times of GRWQMN stations	102
Table 3.49: Surface water quality guidelines or objectives	104
Table 3.50: Range of physical parameters in Lovekin Creek.....	105
Table 3.51: Range of physical parameters in Bouchette Point Creek.....	105
Table 3.52: Range of physical parameters in Port Granby Creek.....	105
Table 3.53: Chloride concentrations	106
Table 3.54: Nutrient concentrations in Lovekin Creek.....	106
Table 3.55: Nutrient concentrations in Bouchette Point Creek.....	107
Table 3.56: Nutrient concentrations in Port Granby Creek.....	107
Table 3.57: Bacteria concentrations in Lovekin Creek.....	107
Table 3.58: Bacteria concentrations in Bouchette Point Creek	107
Table 3.59: Bacteria concentrations in Port Granby Creek.....	107
Table 3.60: Range of physical parameters through the Baseflow Water Quality Monitoring Program in Bouchette Point Creek.....	108
Table 3.61: Range of physical parameters through the Baseflow Water Quality Monitoring Program in Port Granby Creek.....	108
Table 3.62: Nutrient concentrations sampled through the Baseflow Water Quality Monitoring Program in Bouchette Point Creek.....	109
Table 3.63: Nutrient concentrations sampled through the Baseflow Water Quality Monitoring Program in Port Granby Creek.....	109

Table 4.0: Fish species present	116
Table 4.1: Percentage of land cover within 50-metre buffers	131
Table 4.2: Natural areas	133
Table 4.3: Percentage of forest types	136
Table 4.4: Wildlife use of various forest patch sizes	137
Table 4.5: Anticipated response by forest birds to size of largest forest patch ..	138
Table 4.6: Percentage of grasslands and thickets	141
Table 4.7: Percentage of wetland types	144
Table 4.8: Wildlife use of various swamp and marsh sizes	146
Table 4.9: Provincially listed Species at Risk within the Ganaraska Region Conservation Authority	147
Table 5.0: Municipal population projection	154
Table 5.1: Agricultural land use	157
Table 5.2: Agricultural land use in 2006	157
Table 5.3: Farms in 2006 participating in soil conservation practices	159
Table 6.0: Expected changes to water resources in the Great Lakes Basin	171



Chapter 1 - Introduction

1.0 LOVEKIN CREEK, BOUCHETTE POINT CREEK AND PORT GRANBY CREEK WATERSHED PLAN

Throughout the Province of Ontario there is a need to manage and plan for the appropriate use of our natural environment and its resources. As development continues across the landscape, sustainable management and planning of human settlement is required to ensure that current and future actions do not degrade, alter or destroy the natural environment. A watershed plan is one way to ensure that current and future generations are able to progress while acknowledging and addressing effects on the local ecosystem.

The study area of a watershed plan is a watershed; an area of land that drains to a common body of water. Watersheds are defined by topographical boundaries and may cross political jurisdictions. The Ganaraska Region Conservation Authority, formed in 1946, was established to manage local watersheds including Wilmot Creek, Graham Creek, Ganaraska River, Gages Creek, Cobourg Creek, and smaller streams draining to Lake Ontario and Rice Lake (Figure 1.0).

The Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds in the Ganaraska Region Conservation Authority drains to Lake Ontario (Figure 1.0) as it passes through the Municipality of Port Hope and Municipality of Clarington. The watersheds have been delineated by the topography. Heights of land form the drainage basin in the rural areas of the watershed. A watershed is a logical environmental planning area, given that many natural functions are interconnected. Natural cycles in a watershed need to be protected for the benefit of our local environment and community.

In 2001 the Province of Ontario enacted the *Oak Ridges Moraine Conservation Act*, which in 2002 established the *Oak Ridges Moraine Conservation Plan*. The purpose of the *Oak Ridges Moraine Conservation Plan* is to provide land use and resource management planning direction to provincial ministers, ministries, agencies, municipalities, municipal planning authorities, landowners and other stakeholders on how to protect the Moraine's ecological and hydrological features and functions (Ontario Ministry of Municipal Affairs and Housing 2002). Although these watersheds do not originate on the Oak Ridges Moraine, the Regional Municipality of Durham and Municipality of Clarington require a watershed plan to be created to ensure sound environmental management and to fulfill provincial planning recommendations.

1.0.1 Watershed Planning Process

The watershed planning process is one stage in the ongoing process of watershed management. The basic principles of watershed management have changed little since formally described in the early 1990s (Ontario Ministry of Environment and Energy and Ministry of Natural Resources 1993).

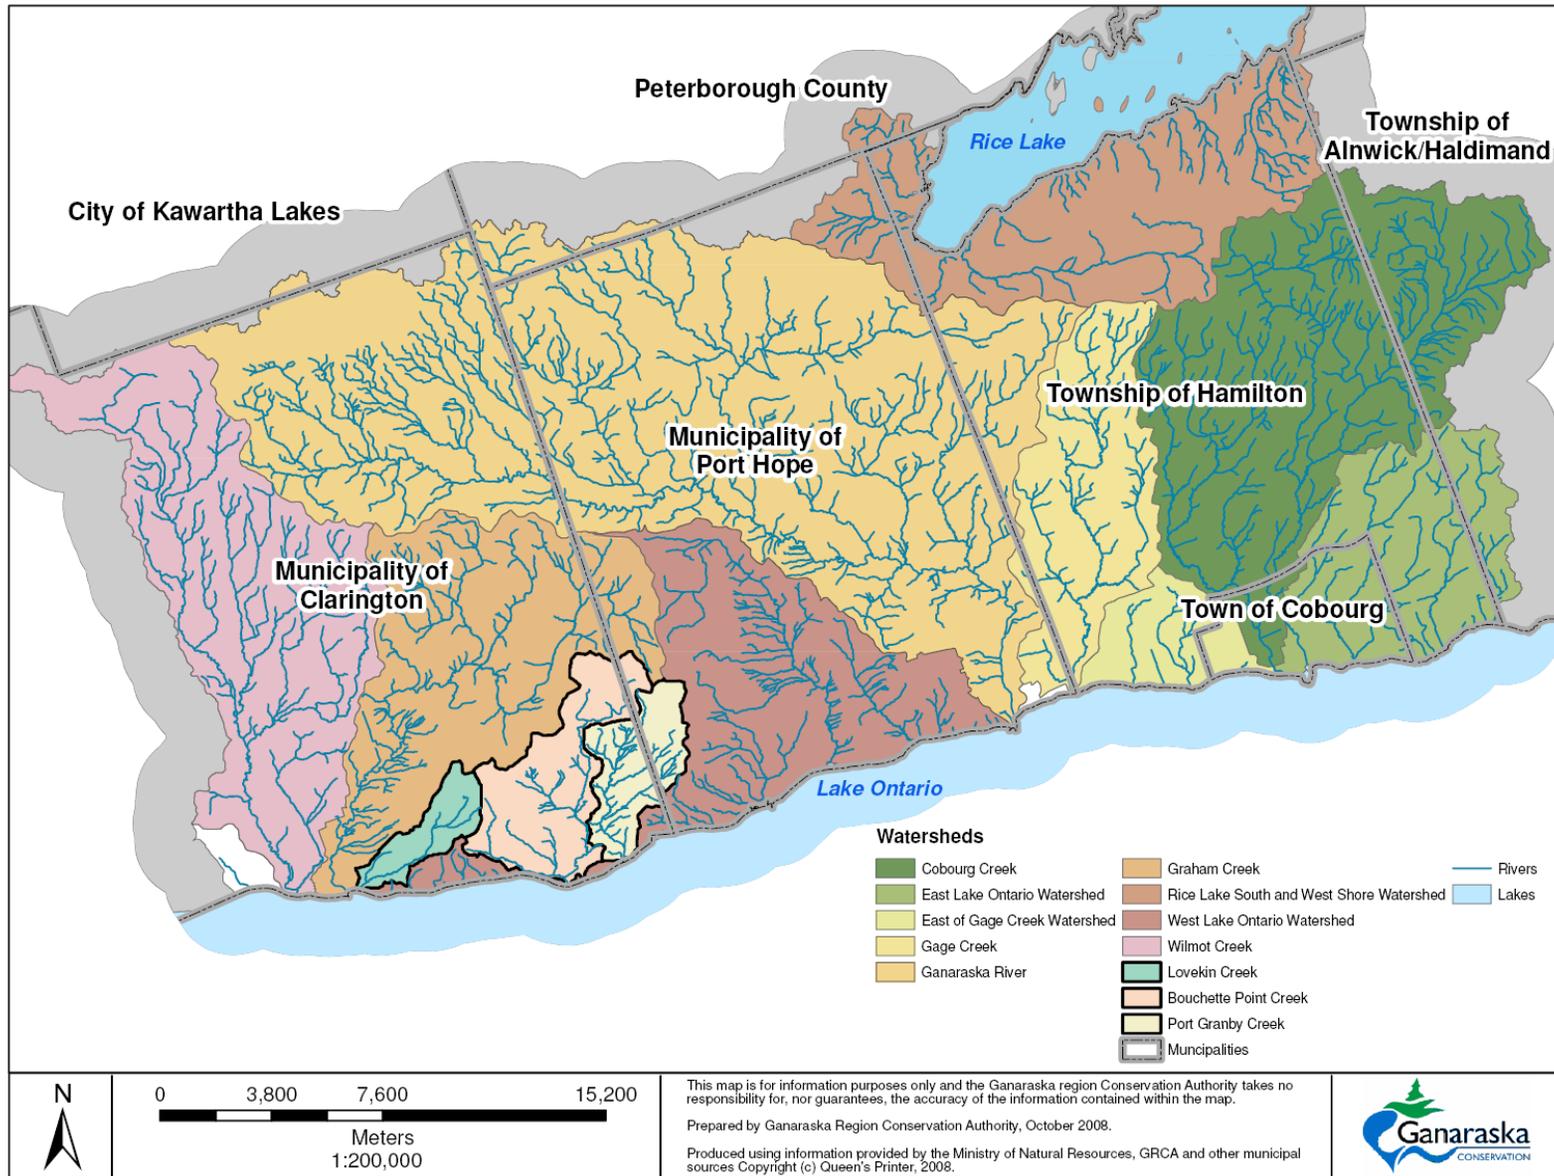


Figure 1.0: Ganaraska Region Conservation Authority

As illustrated in Figure 1.1, the process of watershed management has four phases, including plan development, plan implementation, monitoring and reporting, and reviewing, evaluating and updating the plan. Conservation authorities in Ontario commonly follow this process, although each authority may have slightly different terminology associated with individual steps, suited to local watershed needs.

Watershed plans are usually prepared in response to a trigger, such as public concern about environmental conditions, a municipal official plan requirement or the requirements set out by the provincial government.

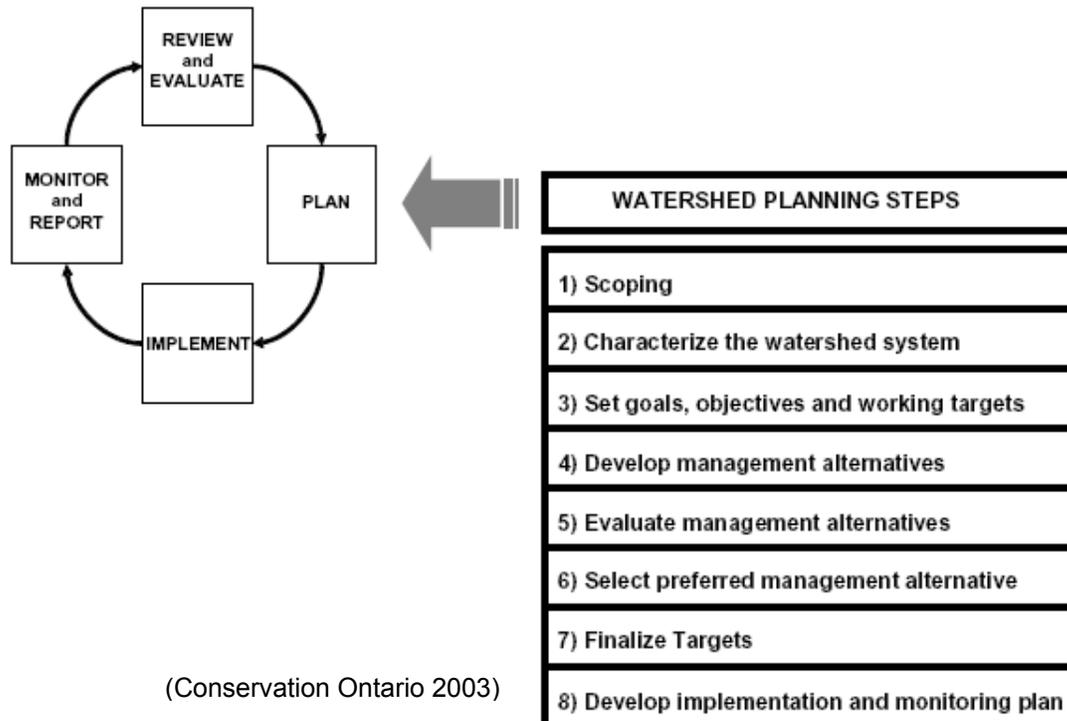


Figure 1.1: Watershed management phases and watershed planning steps

The “plan” phases can be described according to eight steps as shown in Figure 1.2. The key to success is public, community and stakeholder input into milestone steps (e.g., characterization and alternative steps). Steps 1 and 2 have been completed. Scoping requires choosing a study area, creating a terms of reference, and managing data. A terms of reference has been created for the Lovekin Creek, Bouchette Point Creek and Port Granby Creek Watershed Plan (Ganaraska Region Conservation Authority 2005, updated in 2009).

Characterizing the watershed describes the history and current conditions of the study area. This document reflects the characterization step of the watershed plan process. It contains current information to make informed management decisions regarding the conservation and environmentally sound management of the watersheds, and creates the foundation for the watershed plan.

The Lovekin Creek, Bouchette Point Creek and Port Granby Creek Watersheds Plan will address steps 3 to 8. Based on the information presented in this document, as well as computer models, which will be used to evaluate the watershed's response to alternative land use management scenarios, the watershed plan can be created. Current information and model results will be used to develop the plan which will contain recommendations, implementation strategies, and roles and responsibilities. The plan will also address requirements of the *Oak Ridges Moraine Conservation Act*. The watershed plan will be completed in late 2009 or early 2010.

1.0.2 Watershed Planning Study Area

The *Lovekin Creek, Bouchette Point Creek and Port Granby Creek Background Report: Abiotic, Biotic and Cultural Features* and Watershed Plan study area encompasses three watersheds and a larger geographic area (Figure 1.2). Lovekin Creek, Bouchette Point Creek and Port Granby Creek are the watersheds of focus, however smaller drainage areas between these watersheds need to be recognized. These lands contribute functionally to Lake Ontario and to adjacent watersheds. Throughout this report the three watersheds will be the focus; however the larger study area will be discussed where appropriate and will be referred to as the “regional study area”.

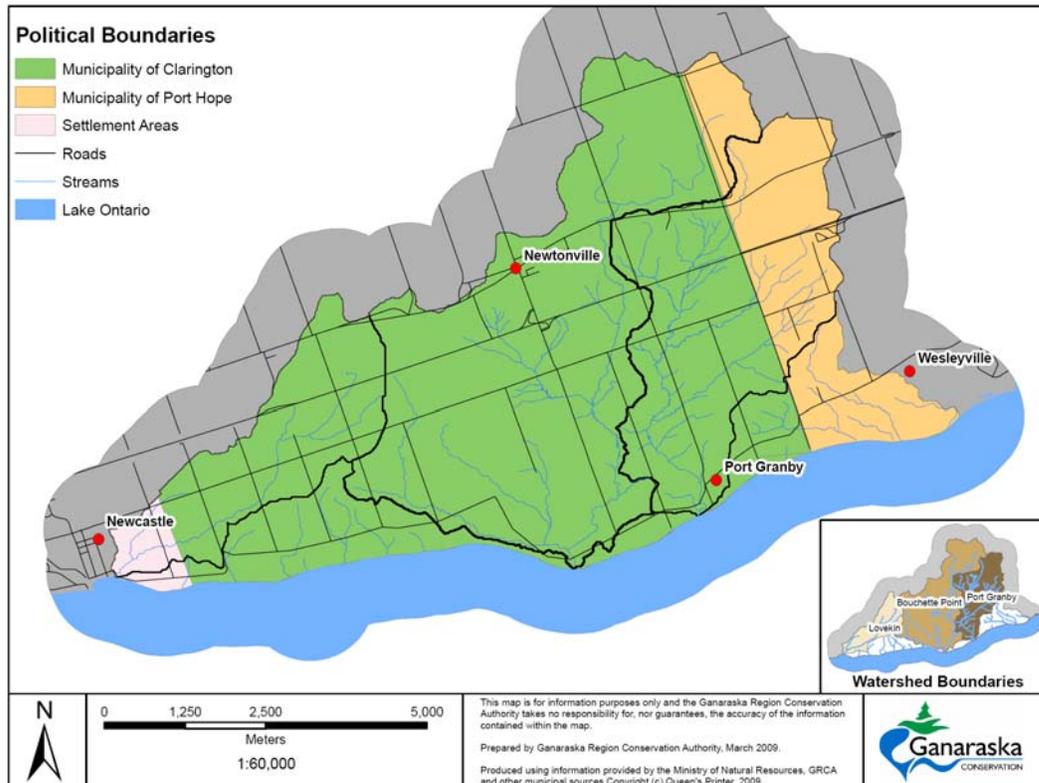


Figure 1.2: Watershed planning area

1.0.3 Fish Habitat Management Plan

While the watershed plan is being created, a Fish Habitat Management Plan is being developed for these watersheds. The Lovekin Creek, Bouchette Point Creek and Port Granby Creek Fish Habitat Management Plan, Watershed Plan, and respective background documents will be created simultaneously. This will assure results and information presented in the documents will complement each other and avoid unnecessary duplication. To ensure that public and stakeholder consultation and involvement are effective, public meetings and consultation of both background documents and plans will occur at the same time. The end result of both plans will be the protection, enhancement and proper management of these watersheds and resources, with a focus on the biotic aquatic resources occurring in the Fish Habitat Management Plan.

1.0.4 Port Granby Project

This section is adapted from Golder Associates Limited (2007) and further adapted by the Municipality of Clarington.

Low-level radioactive waste and associated marginally contaminated soils at Port Granby are part of historical industrial activities in the Port Hope area. Since the 1930s, radioactive materials have been shipped to Port Hope for processing from the Northwest Territories. Processing of uranium ores began in the 1940s and more recently focused on the production of uranium oxide and uranium hexafluoride for nuclear power reactors in Canada and around the world. Disposal of process wastes took place at various locations throughout the area, including at a site on the Lake Ontario shoreline near the small community of Port Granby in the Municipality of Clarington. This site, known as the Port Granby Waste Management Facility, commenced operations in 1955 and continued to receive wastes until 1988. The Port Granby Waste Management Facility is currently owned by Cameco Corporation is currently operated under a licence issued by the Canadian Nuclear Safety Commission.

Initiatives and studies to find suitable solutions for managing the Port Granby wastes over the long term have been ongoing since 1980. All previous attempts were unsuccessful, and in June 2001, the Port Hope Area Initiative was started, guided by an agreement between the federal government and the Municipality of Port Hope and the Municipality of Clarington. The Port Hope Area Initiative includes two primary physical undertakings: the Port Granby Long-Term Low-Level Radioactive Waste Management Project (the Port Granby Project), and the Port Hope Long-Term Low-Level Radioactive Waste Management Project (the Port Hope Project).

The purpose of the Port Granby Project is to clean up and provide appropriate local, long-term management for low-level radioactive waste and marginally contaminated soils currently located in the Municipality of Clarington and

associated with the existing licensed Port Granby Waste Management Facility. The waste materials are to be managed in a suitably constructed, environmentally safe, socially acceptable and appropriately controlled state for the long term (i.e., hundreds of years). The proponent for the Port Granby Project is the Port Hope Area Initiative Management Office of Atomic Energy of Canada Limited (AECL), on behalf of the Government of Canada.

An Environmental Assessment study process for the Port Granby Project was initiated in 2002 in accordance with the *Canadian Environmental Assessment Act*. The responsible authorities for the Project are Natural Resources Canada and the Canadian Nuclear Safety Commission. The Port Granby Project, as described in the Environmental Assessment Study Report approved by the Responsible Authorities and the Municipality of Clarington in 2009, involves the excavation of the waste at the existing waste management facility and its transfer to and storage in a new long-term waste management facility to be constructed north of the existing site. Key elements of the project include:


- The construction of a new long-term waste storage facility immediately north of the existing facility, consisting of a rectangular mound (420 by 240 metres) with an area of approximately 10 hectares, and rising approximately 8 metres above grade.
- The excavation of approximately 200,000 cubic metres (m³) of historic low-level radioactive waste and 101,000 m³ of marginally contaminated soils currently located at the existing waste management facility, and its transfer and placement in the new long term waste management facility.
- The remediation and restoration of the existing waste management facility.
- The development and implementation of a long-term monitoring and maintenance plan for the new waste site and the existing waste site once remediated.

In 2008, an End-Use Advisory Committee was created to develop end use concepts for the rehabilitated existing waste management site, the site of the new long-term waste management facility, and surrounding lands. The Committee had representation from area residents, AECL, the Municipality of Clarington, and the Ganaraska Region Conservation Authority, and was assisted by a landscape architect.

The Committee's vision was to develop an end use concept that would be compatible with the agricultural and rural character of the area and that would preserve, restore and enhance the natural heritage system by supporting ecological connectivity for native plants and wildlife. The Committee members also wanted the new waste management facility to be visually integrated into the landscape as naturally as possible.

The Committee's work was initially focused on the end use of the lands occupied by the existing waste management facility and the site of the new waste management facility north of Lakeshore Road. In developing the end use concept for the new waste management facility, the Committee was inspired by the physiography of the surrounding area and has proposed to replace the engineered shape of the new waste management mound with a soft sinuous form resembling a drumlin. The end use concept also proposes to take advantage of the location of the existing waste site on the Lake Ontario shoreline by introducing diverse natural habitats and by reinforcing its natural linkage functions to other natural habitats in the area (Figure 1.3).

The concept proposed by the Committee also recognizes the opportunity provided by the Port Granby Project to enhance the natural heritage system in the area by creating an ecological preserve on the lands adjacent to the existing and new waste sites. The final report of the End Use Committee will be presented to the Government of Canada and Clarington Council in the spring of 2010.

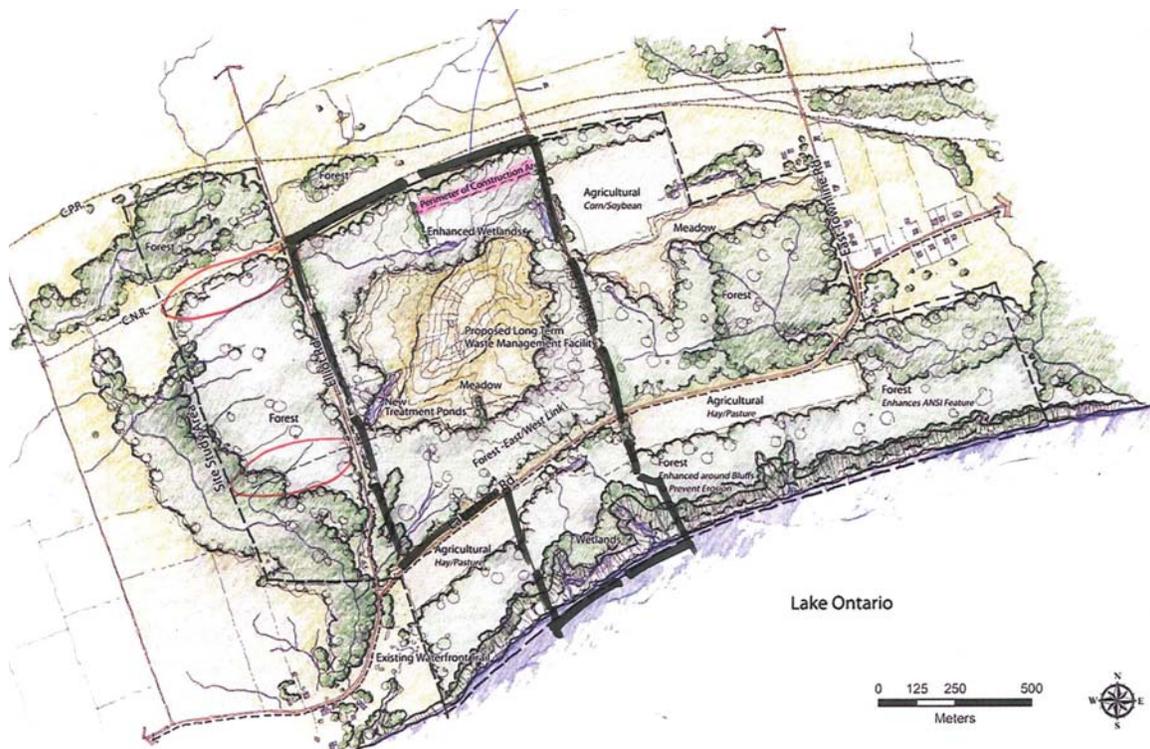

Provided by the End Use Advisory Committee 2010

Figure 1.3: Draft end use concept of the Port Granby Project

1.0.5 Lake Ontario Shoreline


In the late 1980s focus was given on the Lake Ontario shoreline in relation to land use, hazard land identification and proper management. Sandwell Swan Wooster Incorporated (1990) completed a Lake Ontario Shoreline Management Plan for the Central Lake Ontario, Ganaraska Region and Lower Trent Region Conservation Authorities. The overall objective of the study was to develop a comprehensive shoreline management plan to allow the Conservation Authorities to implement long-term development objectives. Sandwell Swan Wooster Incorporated (1990) listed specific objective of the study which were intended to:

- Establish a program for the prevention of flooding and erosion damages and the protection of existing development from flooding and erosion.
- Evaluate hazard areas, investigate littoral processes and to identify and assess potential damage centres and protection strategies along the shoreline.
- Provide background information useful to planning authorities in developing waterfront plans.
- Assess the characteristics of the shoreline including sensitive areas, recreational opportunities, wildlife habitat and the Lake Ontario fishery in terms of potential use or preservation of these resources.
- Determine the optimum management strategy for the shoreline in terms of flood and erosion mitigation and other resource management concerns.
- Identify the role of Conservation Authorities and that of other relevant agencies in managing the shoreline.

Along with the identification of erosion setback limits, 100-year flood lines, erosion rates, sediment characteristics, damage centres and erosion monitoring stations, Sandwell Swan Wooster Incorporated (1990) recommended the following actions, many which have been enacted:

- Municipalities should recognize shoreline hazard lands in appropriate official plan and zoning provisions.
- Measures should be taken to protect environmentally sensitive areas along the shoreline
- Acquisition of the shoreline should be considered in order to protect the environmental characteristics and acquired lands should include the limits of erosion and/or flooding setbacks.
- Implementation of shoreline protection structures should be examined on a site-specific scale, and carried out using coastal engineering studies.
- Conservation Authorities should operate existing shoreline monitoring stations and establish additional sites.

Specific and additional information regarding the Lake Ontario shoreline in the regional study area is found in Sandwell Swan Wooster Incorporated (1990) and in Section 4.1.7 of this document.

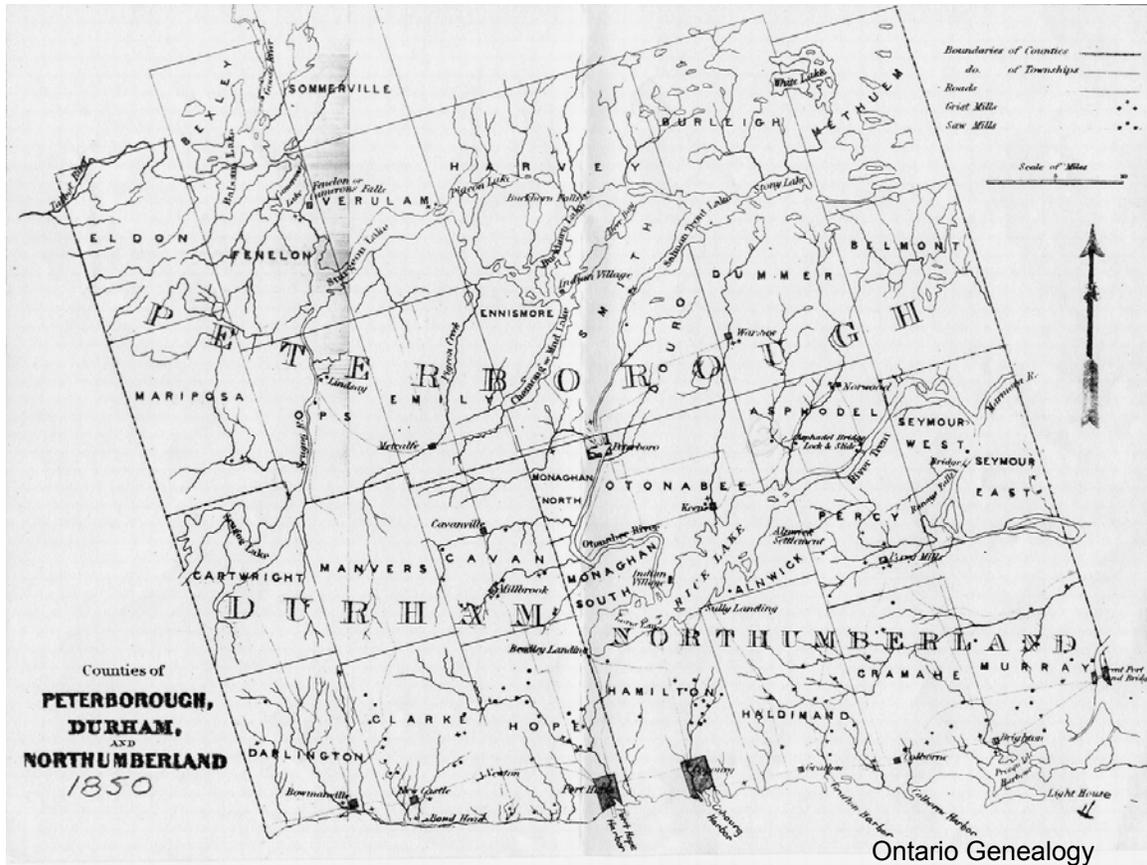

Chapter 2 – History

2.0 CULTURAL HISTORY

Historical settlement patterns, communities and natural resource uses play an important role shaping current communities, land resources and natural environments. Understanding historical events will aid in understanding current land uses and settlement areas. This understanding will guide management decisions while appreciating local history.

2.0.1 Settlement

Prior to European settlement, numerous aboriginal groups inhabited the region. The Hurons resided in the region from Lake Ontario to Georgian Bay until the late 1600s when the Iroquois forced the Hurons to move as far north as Lake Superior (Martin et al. 1986). After 1660 the Cayuga tribe of the Iroquois established outposts in the Rice Lake area and at Ganaraska (Port Hope), thus controlling the fur trade in the area. In the early 1700s the Iroquois were forced out of the surrounding area by the Mississaugas, a stem of the Ojibwa-Algonkians from the Lake Superior region (Martin et al. 1986). The Mississaugas did not settle in any one place, and were nomadic in the area (Schmid and Rutherford 1976).

When settlers arrived in Clarke Township, Black Walnut grew along the shores of Lake Ontario, cedar swamps lined the wet lowlands, and the uplands were covered with maples, beech, white pine, and oaks (Schmid and Rutherford 1976). Among the forests and swamps, wildlife was abundant and fish were plentiful in the streams. Large predators were also inhabited the area including bears and wolves (Belden and Company 1974).

Clarke Township was first surveyed in 1791, followed by the first settlers arriving in the late 1790s (Schmid and Rutherford 1976). The main settlement areas in Lovekin Creek, Bouchette Point Creek and Port Granby Creek included Newcastle/Bond Head, Newtonville, and Port Granby. Newcastle was settled in the early 1800s, yet merged with the neighbouring community of Bond Head in 1851 (Schmid and Rutherford 1976). One of the settling families of Newcastle/Bond Head, for which Lovekin Creek was named after, was the family of Richard Lovekin.

Newcastle was founded on industry, with the most prominent business being Newcastle Agricultural Works. The Newcastle Agricultural Works in 1849 manufactured plows, scufflers, harrows, potash and sugar kettles (Schmid and Rutherford 1976). In 1864 the business burnt down, but being a necessary employer in the community it was rebuilt, and by 1868 the Massey family employed more than 100 men and established 20 agencies in Ontario (Schmid and Rutherford 1976). In 1891 amalgamated with Harris Implement to become Massey Harris and latter Massey-Ferguson.

In 1872, the Newcastle Woollen Manufacturing Company, one of the largest woollen mills in Upper Canada was located in Newcastle, and employed 60 people (Schmid and Rutherford 1976). However, times changed, with the woollen mill burning, the Massey family moving to Toronto, and the loss of Northrop and Lyman, which later become the largest dealers in patent medicines (Schmid and Rutherford 1976). The most populous settlement area of Clarke Township slowly declined due to the numerous setbacks faced by the community.

Newtonville was settled in 1839, and was called Clarke Village from time to time (Schmid and Rutherford 1976). The population of Newtonville increased to 450 people by in 1863, but by 1869 the population declined to 200, with the emigration of resident to Western Canada (Schmid and Rutherford 1976). Newtonville was an important travel route stopover with taverns, store and blacksmiths.

Port Granby was settled in the early 1880s, and in 1832 the D. J. Decker sawmill was established. By 1840 a grist mill was added to make up for depleting timber sawing facilities (Schmid and Rutherford 1976). Port Granby Harbour Company was established between 1848 and 1849 and had three grain elevators; however due to business competition from Port Hope Bond Head the harbour was removed in 1890 (Schmid and Rutherford 1976). In 1869 the population of Port Granby was 60 people.

Along with the mills and ports, forestry was a large economic component of Clarke Township. In order to clear the land for agriculture, which was the main motivation of the settlers; large tracts of land were harvested for timber. In fact Newcastle was one of the chief wood depots east of Toronto with thousands of cords of wood loaded on boats at Port of Newcastle every year for use in Toronto (Schmid and Rutherford 1976). As forests were removed and replaced with wheat and fruit trees, the landscape was altered and forced to adapt. Deforestation created open land on the high ridges of the area, however, over the years, the erosion and the leaching of nutrients from the fields cause the farms on the ridge [Oak Ridges Moraine] to be abandoned (Schmid and Rutherford 1976).

2.0.4 Changing Landscape

Rail travel aided in shaping the current day natural landscape. In 1856 the Grand Trunk Railway connected Toronto to Cobourg (Richardson 1944), thus changing the travel corridor to the south end of Lovekin Creek, Bouchette Point Creek and Port Granby Creek. The railway provided for diverse employment in Clarke Township. Much of the timber harvested was used to fuel the steam locomotives. Today the Canadian National Railway operates on in the same track corridor, moving freight and passengers on two sets of tracks through Newcastle, and the south end of the watersheds.

As with any settlement, the natural environment is changed through the use and exploitation of natural resources and the transformation of land from forests to agriculture, or wetlands to towns and villages. Figure 2.0 depicts a timeline of the events that transformed the wetlands and forests of the watersheds to the towns and villages we see today. Today the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds is radically different from the pre settlement days, both in appearance and in the natural resources that exist.

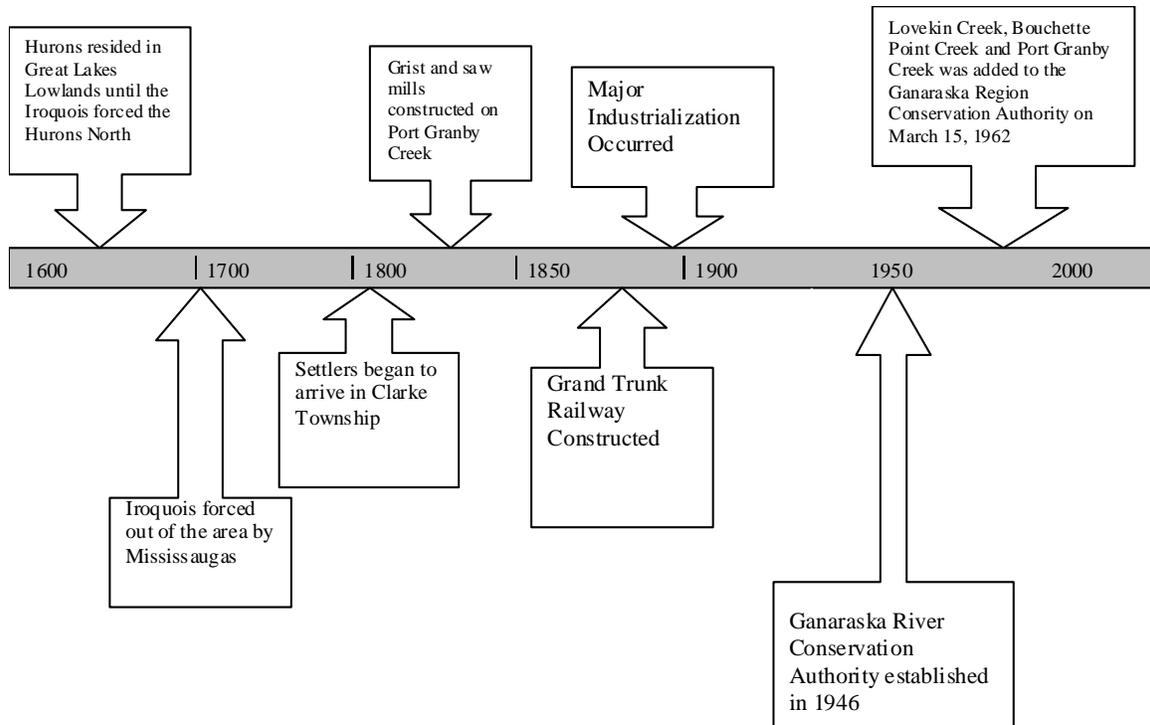


Figure 2.0: Post settlement events



Chapter 3 - Abiotic Features

3.0 REGIONAL CLIMATE

Climatic elements such as precipitation (rain and snow), evaporation and temperature have a dominant effect on various components of the hydrologic cycle (Figure 3.0). Understanding these elements and their patterns plays a key role in developing water budgets and understanding how natural systems will respond to changes in climate and drought conditions. The climate of an area depends on its location within the worldwide circulation of the atmosphere. Local climates may also be profoundly affected by the proximity of an area to large water bodies and local topographic relief.

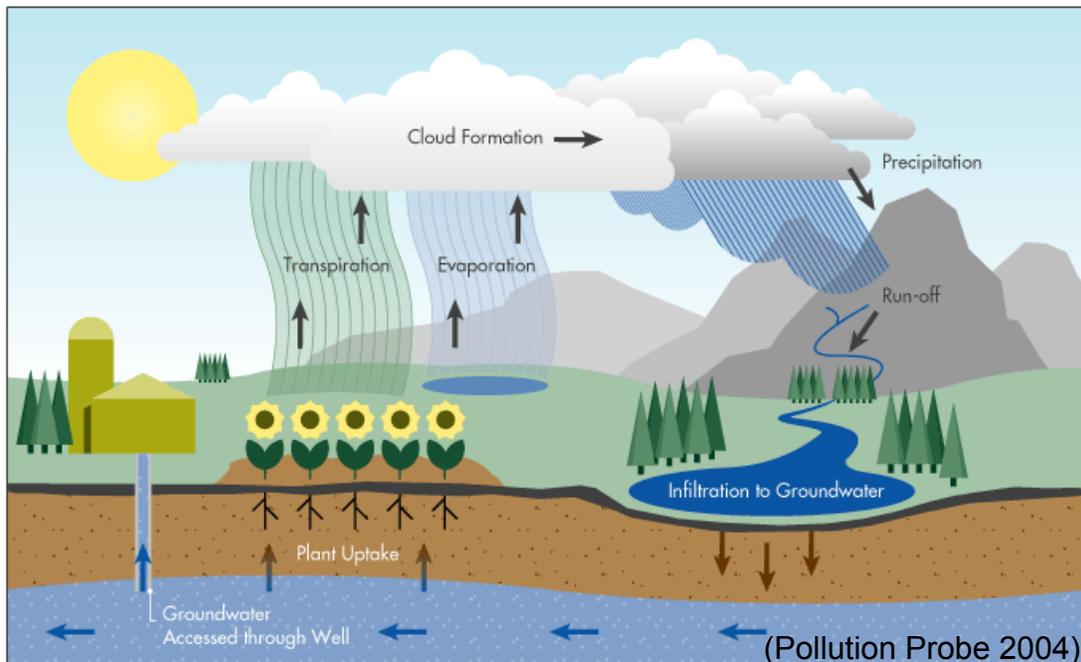


Figure 3.0: Hydrologic cycle

Topography influences local temperature and precipitation. Average annual temperature and precipitation show only minor variation across the Ganaraska Region Conservation Authority due to the small geographic scale. The climate in the Ganaraska Region Conservation Authority is continental, with cold winters and warm summers. The most significant factor affecting the climate is Lake Ontario. A definite moderating effect due to lake influence is seen in the immediate vicinity of the Lake Ontario shoreline, while the modification in climate diminishes as one ascends the northern inland slopes. On the Oak Ridges Moraine the climate is colder, exhibiting harsher winters and later springs than the rest of the drainage area.

Climate data from Environment Canada is available from 20 stations within (four stations) and nearby the Ganaraska Region Conservation Authority and can be used to determine precipitation and temperature and estimate infiltration and evapotranspiration. In addition to the climate data from Environment Canada, the

Ganaraska Region Conservation Authority operates five meteorological stations (Figure 3.1 and Table 3.0) that provide 15-minute interval climatic data. In 2008 rain gauges were installed on three Provincial Groundwater Monitoring Network wells. These wells are located near Leskard in Wilmot Creek, on Newtonville Road in Graham Creek and in the Rice Lake Conservation Area (Figure 3.1). Data is not yet available for these rainfall stations.

According to the climatic information provided (Table 3.1), the mean annual daily temperature in the Ganaraska Region Conservation Authority ranges from about 5.9 to 7.3 °Celsius (C)). January is the coldest month with mean daily temperatures in the -8°C range. July is the warmest month with a mean daily temperature of approximately 20 °C.

According to climate data from several local Environment Canada climate stations, precipitation in the Ganaraska Region Conservation Authority shows local variation (Figure 3.2). In the lakeshore region the mean annual precipitation varies from 755 to 830 millimetres (mm), while on the northern upland slopes it varies from 875 to 900 mm. There is greater precipitation (up to 1000 mm) on the Oak Ridges Moraine upland area than on the slope and low regions of the Ganaraska Region Conservation Authority.

Precipitation varies seasonally, with the September to December period generally being the wettest. Between December and March most precipitation falls as snow, whereas in the months of November and April precipitation is mixed, with most being rain. Depending on location, either February or July is typically the driest month of the year, however in 2009, the month of February received more rainfall than normal. The mean annual precipitation ranges from about 830 mm/year at Port Hope in the south to about 880 mm/year in Orono in the west. About 70 to 85% of precipitation falls as rain. Figure 3.3 and Figure 3.4 show the annual meteorological trends based on the records of two meteorological stations in and near the Ganaraska Region Conservation Authority.

Table 3.0: GRCA-operated climate stations

Station Name	Location	Year Established	Type of Measurements
GRCA Main Office	2216 County Road 28, Port Hope	2002	Rainfall, Air Temperature, Wind Speed and Direction, Relative Humidity
Cobourg Creek*	609 William Street, Cobourg	2003	Rainfall, Air Temperature
Wilmot Creek	Concession Road 3, Newcastle	1999	Rainfall
Forest Centre	10585 Cold Springs Camp Road, Campbellcroft	2001	Rainfall, Snowfall, Air Temperature, Wind speed and Direction
Baltimore Creek	4494 County Road 45, Baltimore	1999	Rainfall, Air Temperature, Wind Speed and Direction

*Replaced the Cobourg Pump House Station climate station that operated since 2000.

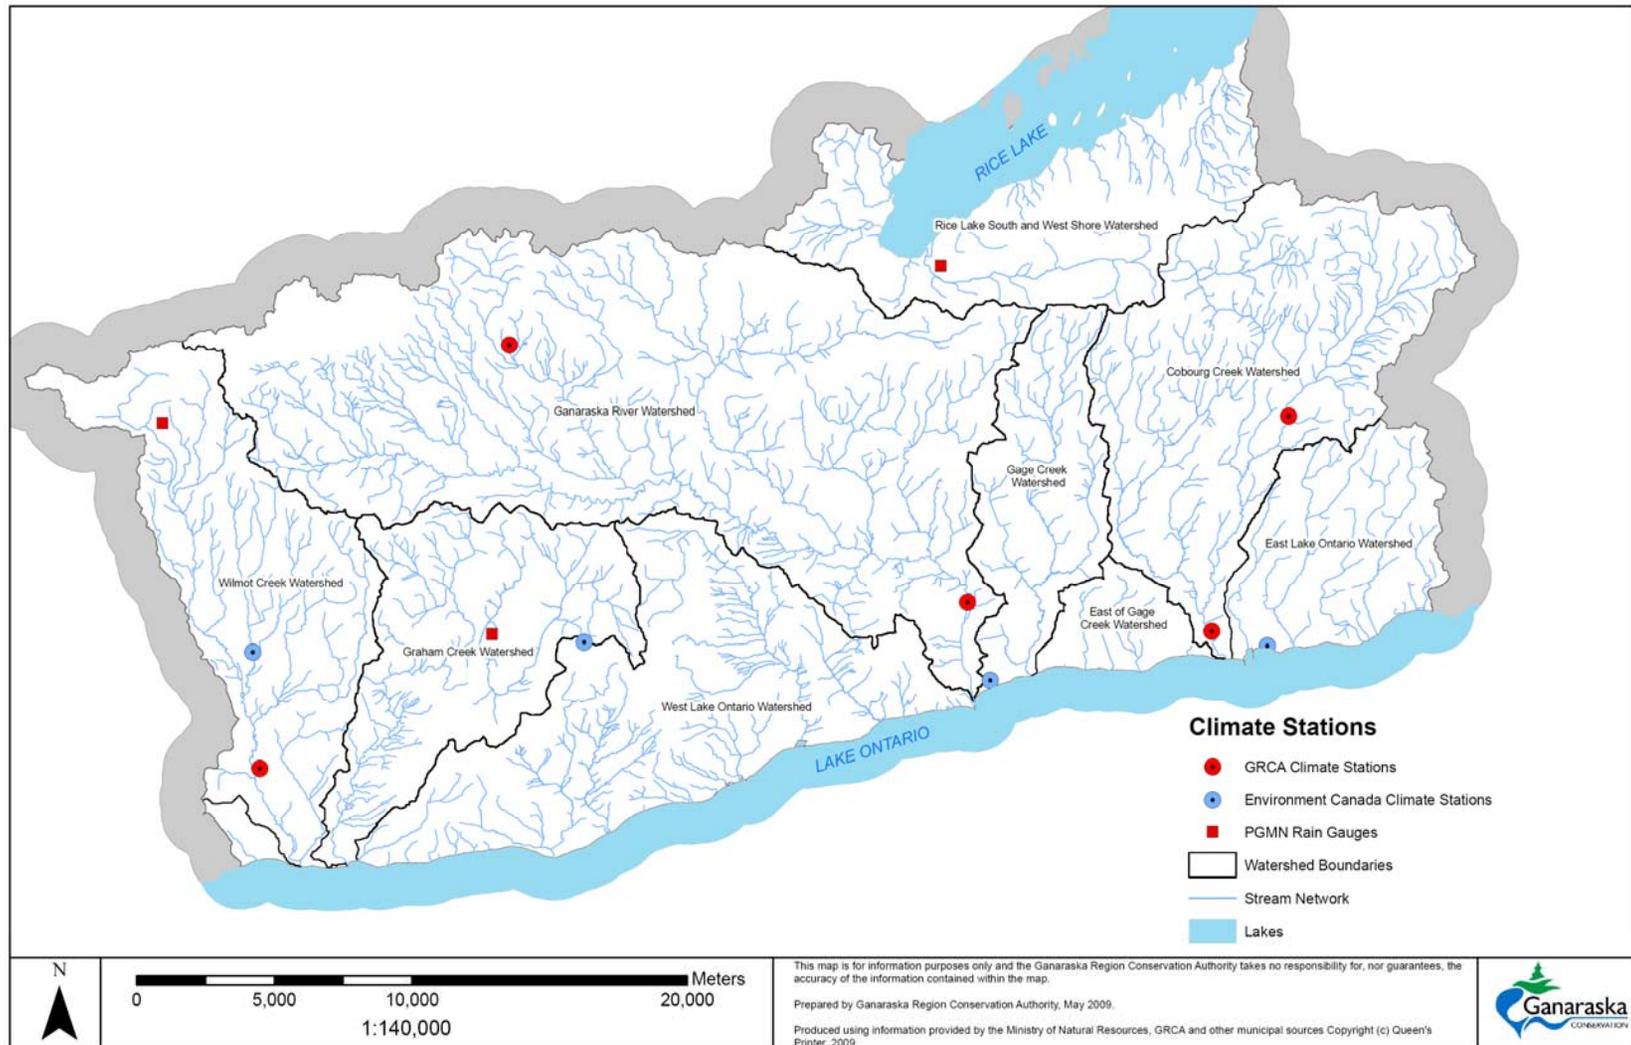


Figure 3.1: Climate stations

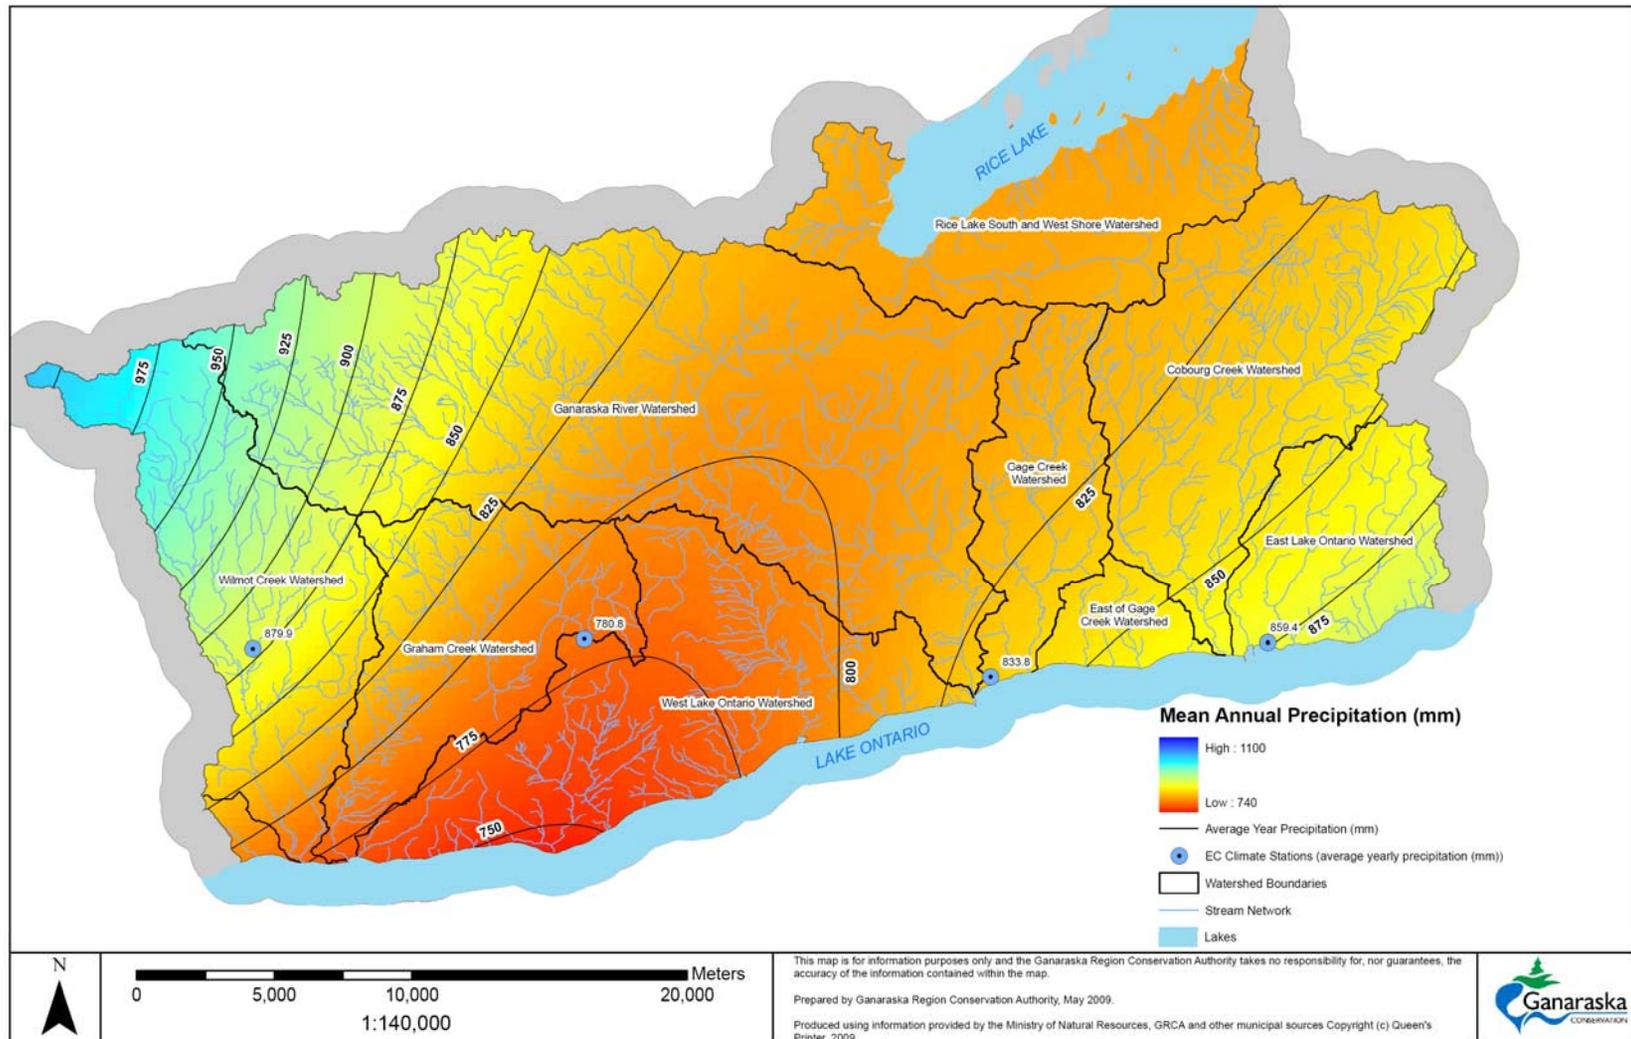


Figure 3.2: Precipitation distribution

Table 3.1: Precipitation and temperature data summary

	Campbellford*	Cobourg	Port Hope	Orono	Peterborough*
Elevation (masl)	146	79.2	80.8	148	191.4
Total Precipitation (mm)	836.7	871.1	832.0	879.9	840.3
Rain (mm)	684.1	765.8	709.0	724.5	682.0
Snow (mm)	149.3	106.0	122.0	152.6	162.0
Wettest Month (mm)	December, 82.1	September, 90.0	December, 80.5	September, 76.3	August, 83.2
Driest Month (mm)	July, 58.3	February, 54.0	July, 53.3	February, 63.8	February, 50.6
Mean Year	--	7.1	7.3	6.8	5.9
Temperature (°C)					
Warmest Month (°C)	--	July, 19.6	July, 20.0	July, 20.1	July, 19.4
Coldest Month (°C)	--	January, -6.0	January, -5.8	January, -6.9	January, -8.9

* Stations located outside of the Ganaraska Region Conservation Authority, but near enough to have relevant data. Data range from 1971 to 2000 from selected weather stations.

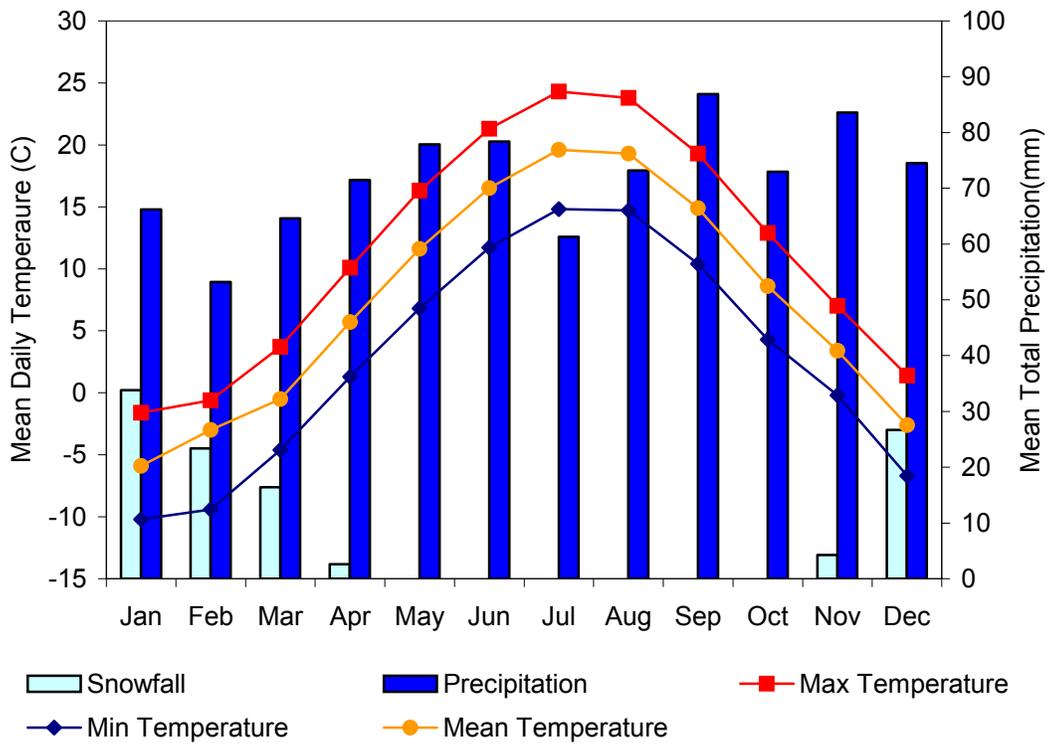


Figure 3.3: Cobourg STP meteorological station (6151689), 1970 to 2003

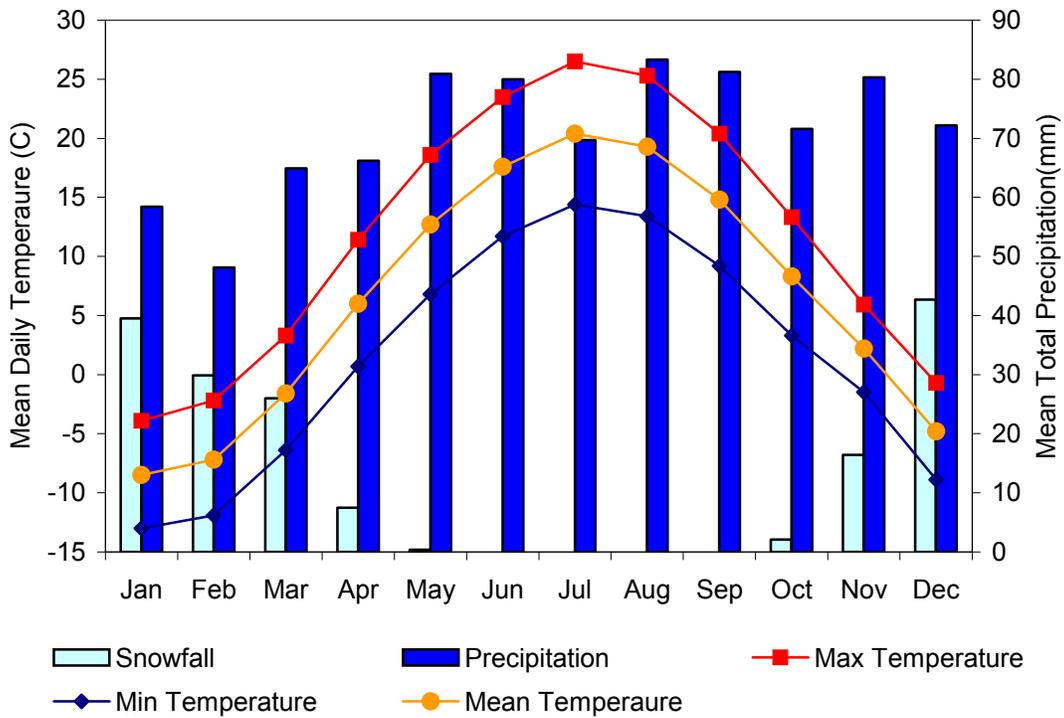


Figure 3.4: Peterborough, Trent University meteorological station (6151689), 1968 to 2000

3.1 GEOLOGIC CHARACTERISTICS

Geology is the scientific study of the Earth, its origins and evolution, the materials that make it up, and the processes that act on it. The following section defines the bedrock, glacial deposition, topography, physiographic regions, surficial geology and soils of the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds.

3.1.1 Bedrock

The bedrock beneath the three watersheds is Paleozoic bedrock that is 550 to 350 million years old (Earthfx Incorporated 2006). Paleozoic bedrock was created from the eroded materials of mountains being lithified on top of the Canadian Shield. Across southern Ontario there are five Paleozoic Bedrock types. The bedrock unit that represents the lower geologic formation in the three watersheds is the Lindsay Formation from the Simcoe Group, composed of coarse-grained limestone. Limestone bedrock, which can be highly fractured, has the potential to create productive aquifers or aquitards when it is poorly fractured with low permeability (Earthfx Incorporated 2006).

The surface of the bedrock was created as a result of historical erosion. Erosion created depressions and channels in the bedrock surface and topographic highs were created from rocks that were not eroded. The bedrock is completely covered by a mantle of Quaternary deposits. The bedrock elevation ranges from about 50 to 80 meters above sea level (masl) along the shore of Lake Ontario to about 100 masl at the north end of the watersheds (Figure 3.5).

3.1.2 Glacial Depositions

Geological activity during the Wisconsin Glaciation period formed the major deposits that sit on the limestone bedrock. The Late Wisconsinan ice advance occurred 25,000 to 12,000 years ago, in which the Laurentide ice sheet deposited a thick sheet of till known locally as Bowmanville Till (Brookfield et al. 1982), which has a regional correlation with Newmarket Till or Northern Till (Earthfx Incorporated 2006). The Bowmanville Till lies on the thick lower sediments comprising of Port Hope Till, Clarke Deposits, and a thin layer equivalent to the Scarborough Formation (Brookfield et al. 1982; Earthfx Incorporated 2006, Jagger Hims Limited 2007, YPDT-CAMC Groundwater Study [website] 2006, Ganaraska Region Conservation Authority 2007).

The youngest glacial deposits in the three watersheds consists of glaciolacustrine sediments (glacial till, river deposits, and Lake Iroquois Deposits), left behind from glacial lakes that form a thin layer over the Bowmanville Till (Earthfx Incorporated 2006). Many regional and local names of the geological characteristics exist (Table 3.2).

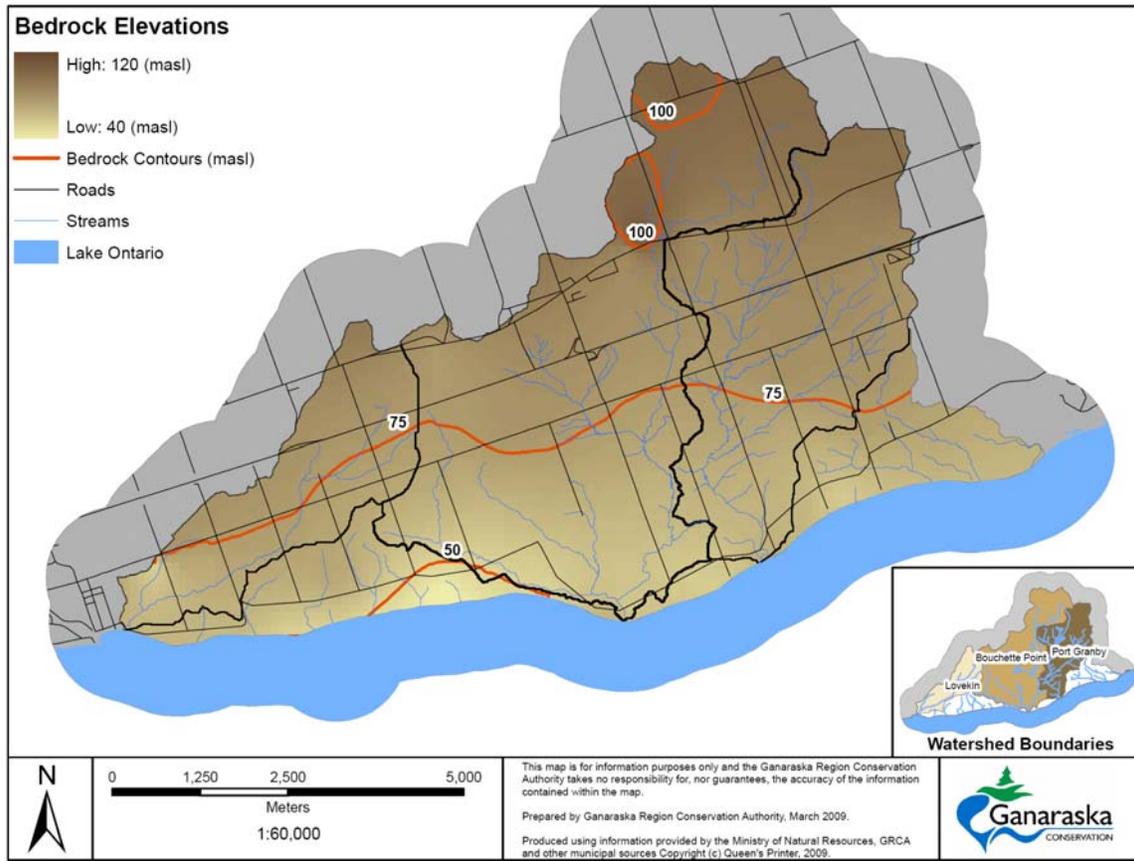


Figure 3.5: Bedrock elevation

Table 3.2: Geologic units in order of youngest to oldest deposition

Geologic Units Derived from the Regional Model (Based on 5 layers)	Geologic Units Derived from the Core Model (Based on 8 layers) Figure 3.7 (Earthfx Incorporated 2006)	Geologic Units Derived from Brookfield et al. 1982, and Singer 1981 (used in GRCA studies)	Description
	Late stage sediments (glacial/fluvial)		Aquifer or Aquitard
Newmarket Till	Bowmanville Till (middle glacial unit)	Bowmanville Till	Aquitard
Lower Sediments	Clarke Deposits or equivalent	Clarke Deposits	Upper Aquifer
	Port Hope Till (lower glacial unit)	Port Hope Till	Aquitard
	Scarborough Formation or equivalent	Scarborough Formation or equivalent	Lower Aquifer
Bedrock	Weathered Bedrock	Fractured (Weathered) Bedrock	Aquifer
		Unweathered Bedrock	Aquitard

A vertical cross-section of the geological characteristic of the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds can be viewed using data from Ministry of the Environment water well records. Using Viewlog software, two cross-sections were generated from northwest to southeast and east to west (Figure 3.6). Eight geological layers are seen in the cross-sections (Figure 3.7) and are in chronological order as described in Table 3.2. The thickness of the overburden deposits, increase from south to north. Each geological layer is described in more detail below. It should be noted that geological units across southern Ontario vary considerably in structure and therefore local geological units exist throughout Ontario. In this document the localized names referenced from many studies completed in the area will be used.

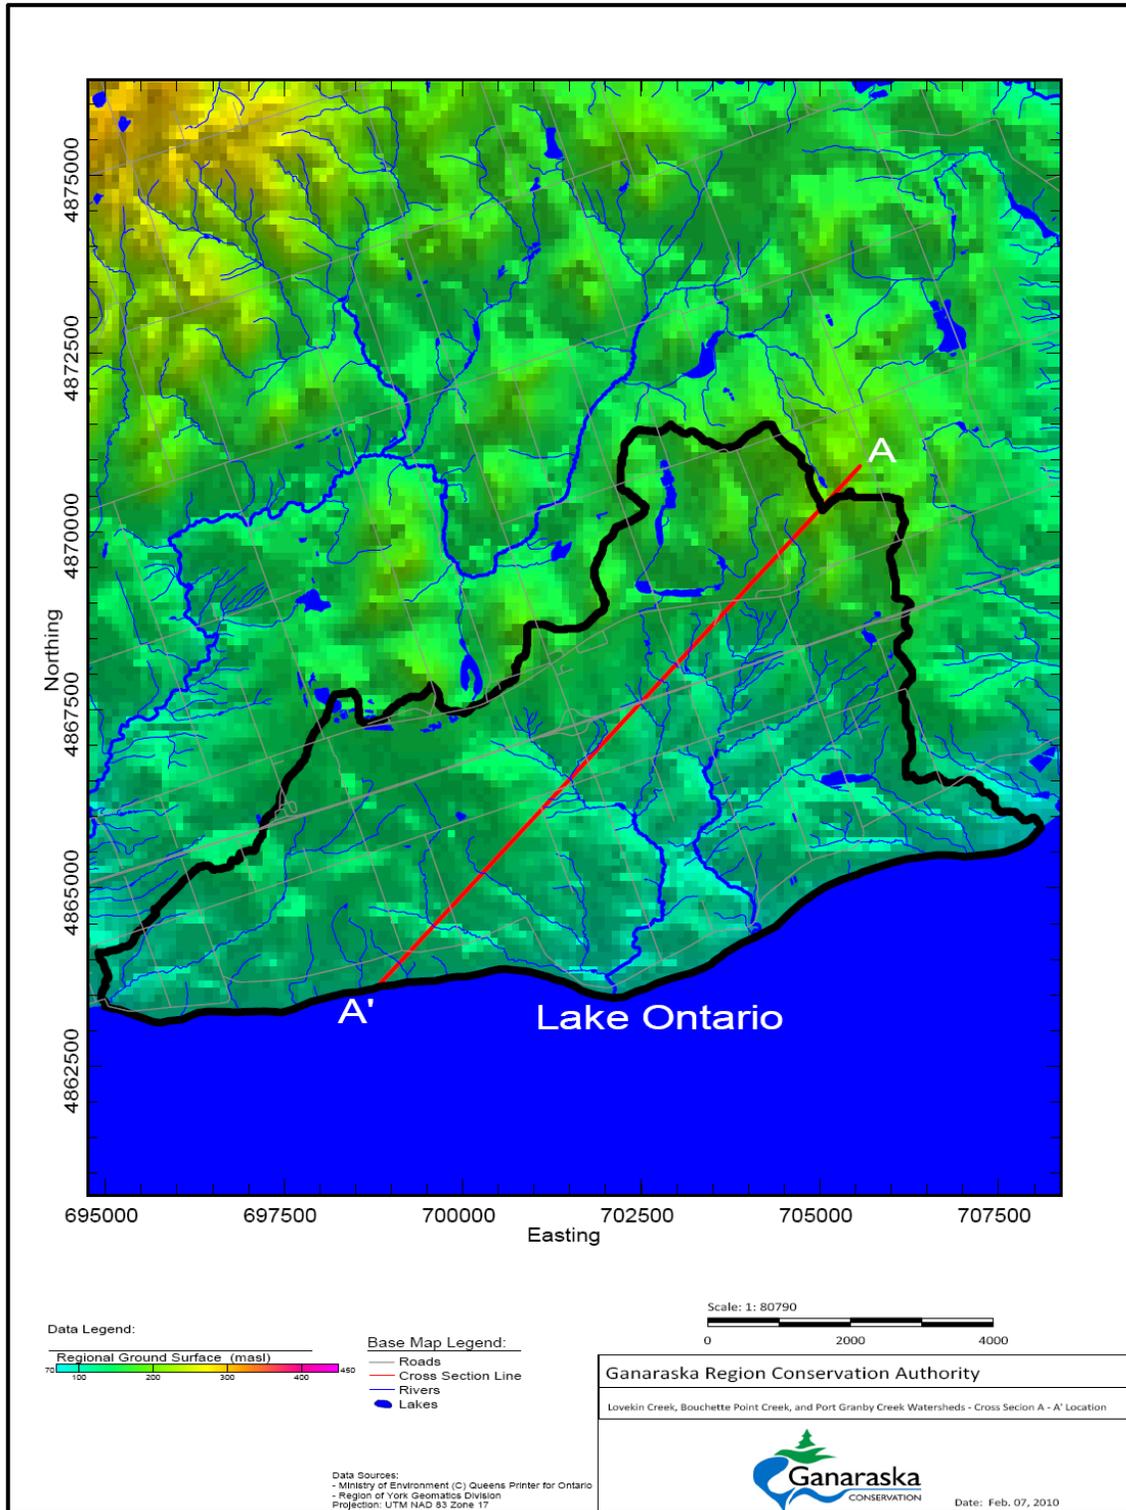


Figure 3.6: Cross-section location

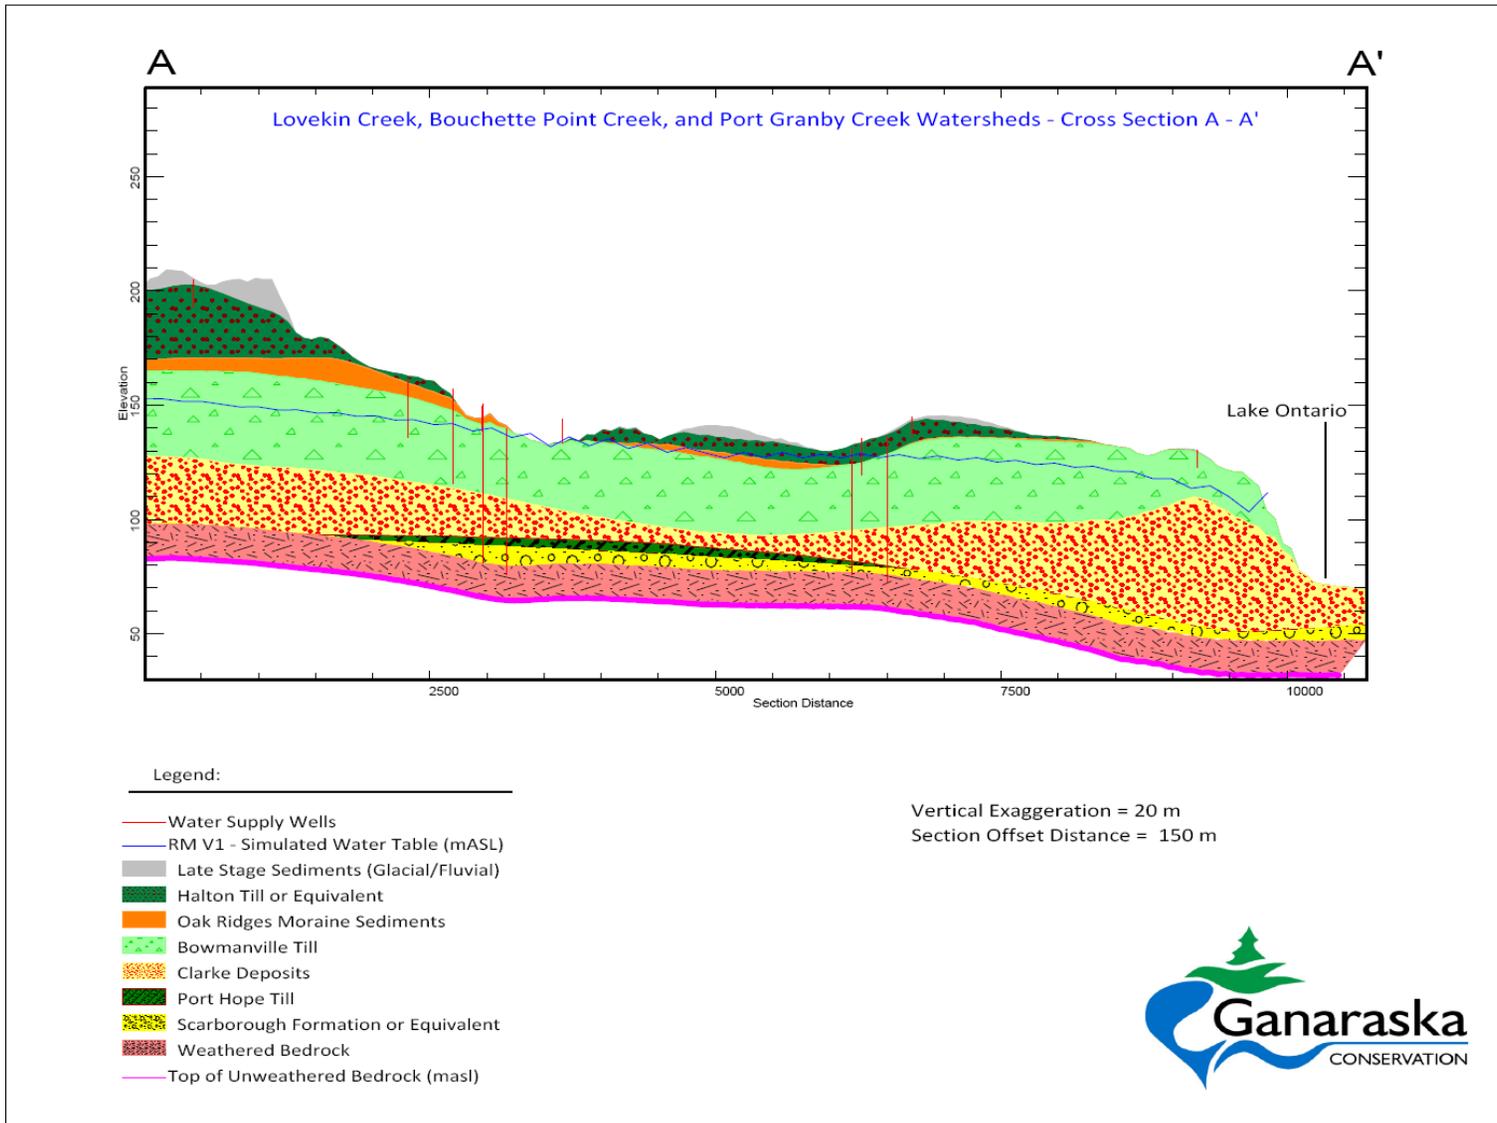


Figure 3.7: Cross-section A – A'

Scarborough Formation or Equivalent

The Scarborough Formation or its localized equivalent sits on top of the bedrock and was formed by a deltaic deposit at the mouth of a very large historic river (Eyles 2002) It is described as a sequence of sediments ranging from fine clay/silts to channelized coarse cross-bedded sands that become vertically coarser (Jagger Hims Limited 2007). As a result of the coarse grained sediments in this formation deep overburden aquifers are found in some localized areas.

Geologists feel that the regionally known Scarborough Formation does not extend into the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds, however an equivalent formation sits on top of the bedrock. As shown in Figure 3.7 the Scarborough Formation or equivalent unit is very thin and is not seen in the northern or southern areas of the watershed. This geological unit, equivalent to the Scarborough Formation, forms is lower in sand and gavel but creates a productive aquifer where it exists.

Port Hope Till (Lower Glacial Unit)

The Port Hope Till (equivalent to the regional Sunnybrook Drift) was deposited in glacial and proglacial lacustrine areas (Jagger Hims Limited 2007). Sediments that form the Port Hope Till were deposited as mud on the floor of a cold, deep glacial lake and pebbles were dropped into the sediments by floating ice (Eyles 2002; Earthfx Incorporated 2006). These fine, compactable sediments cause the Port Hope Till to be an aquitard. Brookfield et al. (1982) correlated the regional Sunnybrook Drift to a localized Port Hope Till that contains less clay and more silt than the Sunnybrook Drift. Figure 3.7 shows that the Port Hope Till declines in thickness towards the south end of the three watersheds.

Clarke Deposits or Equivalent

The Clarke Deposit (regionally correlated to the Thorncliffe Formation) includes glaciofluvial deposits of sand, silty sand, silt and pebbly silt, and clay (Earthfx Incorporated 2006). This geological unit was deposited by glacial meltwaters entering a deep, ice-dammed ancestral Lake Ontario. The Clarke Deposit is highly variable and serves as an aquifer (Jagger Hims Limited 2007). Singer (1981) correlated the regional Thorncliffe Formation to a localized Clarke Deposit, which contains less clay and more silt (Brookfield et al. 1982). Figure 3.7 shows that the Clarke Deposit is found beneath the Bowmanville Till.

Bowmanville Till (Middle Glacial Unit)

The Bowmanville Till is a distinct, dense glacial deposit of fine sediments (Jagger Hims Limited 2007) left behind by the Laurentide Ice Sheet. The Bowmanville Till is correlated to the regionally known Newmarket or Northern Till (Earthfx Incorporated 2006; YPDT-CAMC Groundwater Study [website] 2006). With variable pavement layers in the Bowmanville Till, this geological unit acts as an

aquitard. Brookfield et al. (1982) correlated the Newmarket Till to the localized Bowmanville Till, which contains less clay and more silt.

Late Stage Sediments (Glacial/Fluvial)

Following the Wisconsin deglaciation, deposits formed in the glacial lakes and rivers. Recent deposits are not as significant in relation to the underlying geologic units (Jagger Hims Limited 2007). Where they do occur they are in lower elevations and floodplains. In the three watersheds the late stage deposits include gravely beach deposits formed along the former shores of Lake Iroquois.

3.1.3 Topography

Topography refers to the shape, form and physical features of the Earth's surface (Eyles 2002). In the three watersheds the land generally slopes from north to south. The maximum topographic elevation is approximately 250 masl and empties into Lake Ontario with a water surface elevation of approximately 75 masl. Topography is best understood when observed in the field. Figure 3.8 displays the topographic features of the three watersheds along with differing elevations. The figure was created using a digital elevation model with a five-metre grid. Topographic features are important in promoting groundwater recharge and minimizing surface water runoff.

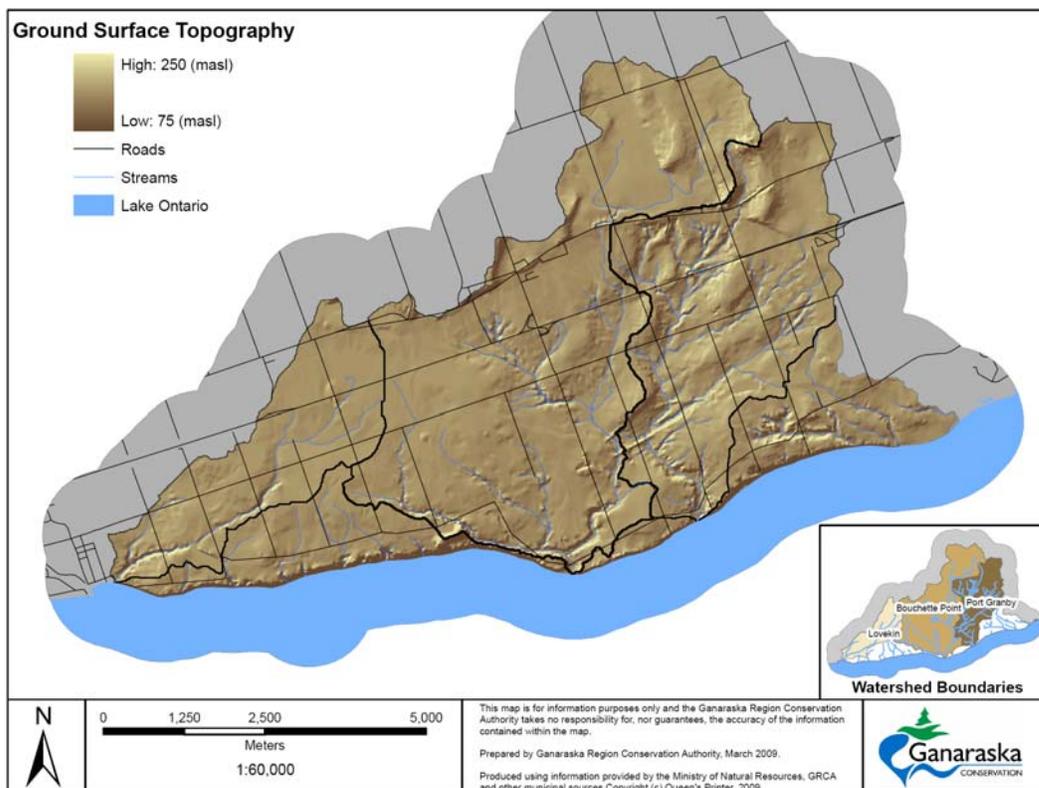


Figure 3.8: Ground surface topography

3.1.4 Physiographic Regions

Physiography refers to areas of similar geological form and includes the physical features of the Earth's surface. The Iroquois Plain physiographic region contains the three watersheds, and is regionally located south of the South Slope. This physiographic region is a relic of the lowland bordering Lake Ontario, which was inundated with water during the late Pleistocene period by Lake Iroquois (Chapman and Putnam 1966). The Iroquois Plain contains many large drumlins, which would have been islands in Lake Iroquois. Today these former islands look like terraces, formed by historic wave action (Chapman and Putnam 1966).

Bluffs or gravel bars running east to west frequently mark the northern boundaries of the Iroquois Plain. These represent the ancient shoreline of glacial Lake Iroquois, following the recession of the last glacial advance. This beach line runs from 6.4 to 10.3 km to the north and nearly parallel to Lake Ontario (Gartner Lee Limited 1976). The beach sits approximately 75 m above the current shoreline, and the plain extends to the current lake level. At its northern limits, the plain has an irregular formation, which levels to a clay plain. This has created a terrain that below the beach line, is similar to the south slope. However, different materials were deposited in each area, with a different glacial history (Gartner Lee Limited 1976).

3.1.5 Surficial Geology

Surficial geology refers to the upper layer of exposed geological deposits. In the three watersheds there are a maximum of seven surficial geological units (Table 3.3). The majority of these deposits were created during the Pleistocene epoch when massive ice formations and the resulting meltwaters shaped the surface that is seen today. Figure 3.9 depicts the surficial geology of the three watersheds as defined by the Ontario Geological Survey and Geological Survey of Canada.

Table 3.3: Surficial geology

Surficial Geology Unit	Lovekin Creek km²	Bouchette Point Creek km²	Port Granby Creek km²
Glacial Lake Deposits: sand and gravel	0.43	2.48	0.97
Glacial Lake Deposits: silt and clay	0.51	1.12	0.34
Glacial Lake Deposits: silt and sand	1.17	9.57	9.24
Upper Thorncliffe Formation	--	--	0.15
Bowmanville (Newmarket) Till	4.94	7.98	2.48
Organic Deposits	0.12	1.66	0.08
River Deposits: Modern	0.43	0.22	0.07

Glacial lake silt and sand deposits form the dominant upper most exposed geological layer, acting as both aquifers and aquitards. Bowmanville Till (regionally equivalent to Newmarket Till) forms the second most dominant upper exposed geological layer, specifically in Lovekin Creek and Bouchette Point

Creek watersheds, and acts as an aquitard. Other glacial lake deposits are found throughout three watersheds with compositions ranging between silt, sand, gravel and clay. River deposits are located in the river valleys and beds. Of special note is the appearance of the Upper Thorncliffe Formation along the lower reach of Port Granby Creek. This sandy and silty formation was deposited by glacial meltwaters entering the deep, ice-dammed ancestral Lake Ontario (Earthfx Incorporated 2006). This geological unit is correlated with the local Bond Head Till, which contains more silt than the regional Thorncliffe Formation (Brookfield et al. 1982).

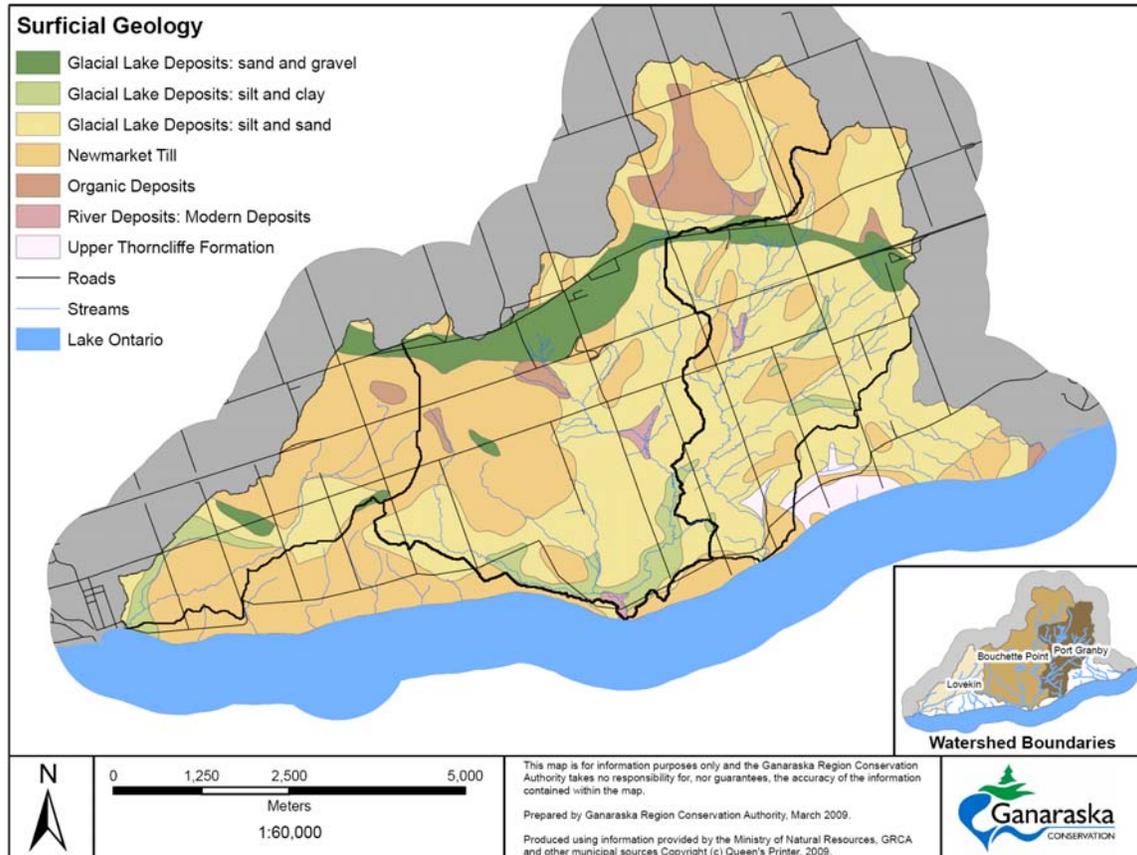


Figure 3.9: Surficial geology

3.1.6 Soils

Soil is defined as the unconsolidated organic material on the immediate surface of the Earth that serves as a natural growing medium for vegetation (Hoffman 1974). Figure 3.10 shows the different soils found in the three watersheds as defined by the Ontario Ministry of Agriculture, Food and Rural Affairs.

The dominant soil type is the Bondhead Series. This soils group is formed from limestone till and is commonly found in relation to drumlins or elongated hills (Webber et al. 1991). Bondhead soils provide good drainage and are suitable for

agriculture. Other soils found in the three watersheds that are associated with limestone till are Otonabee and Guerin soils. Otonabee soils provide good drainage whereas Guerin soils provide imperfect drainage (Webber et al. 1991).

Percy loam, which also provided good drainage but susceptible to erosion are found in the bottom end of Lovekin Creek, Bouchette Point Creek and Port Granby Creek. Imperfect drainage and unproductive soils are also found, including muck which occurs in depressions underlain by clay (Webber et al. 1991).

In hydrologic calculations, soils may be classified into 4 main groups (A, B, C, D) and the three interpolated groups (AB, BC, CD). These classifications depict how soils move water. Table 3.4 describes the features of the hydrologic soils group. Figure 3.11 shows the locations of the hydrologic soil types.

Table 3.4: Hydrologic Soils Group

Hydrologic Soils Group	Run-off Potential	Infiltration when Wet	Typical Soils
A	Low	High	Excessively drained sands and gravels
B	Moderate	Moderate	Medium textures
C	Medium	Slow	Fine texture or soils with a layer impeding downward drainage
D	High	Very slow	Swelling clays, clay pan soils or shallow soils over impervious layers.

(Hudson 1981)

Soil types and characteristics help dictate land use. In the Iroquois Plain, sandy loam soils are typical, allowing for agricultural practices to occur. The limiting factors of agricultural are imperfect drainage and the presence of muck soils.

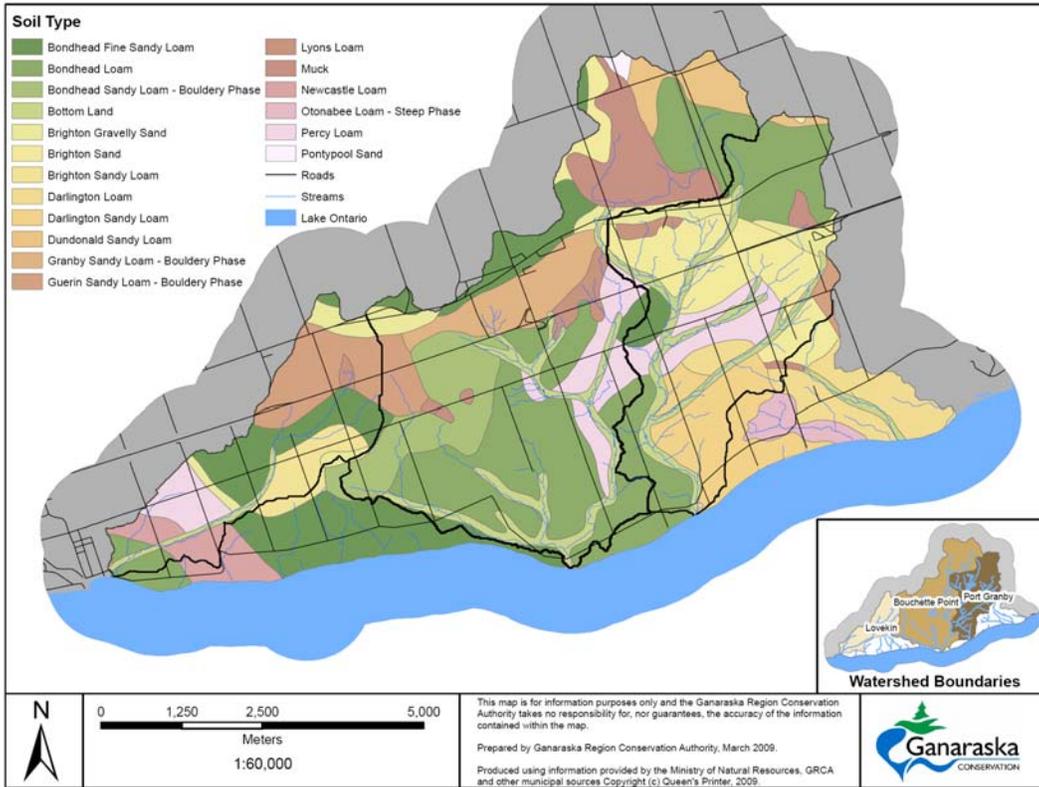


Figure 3.10: Soils

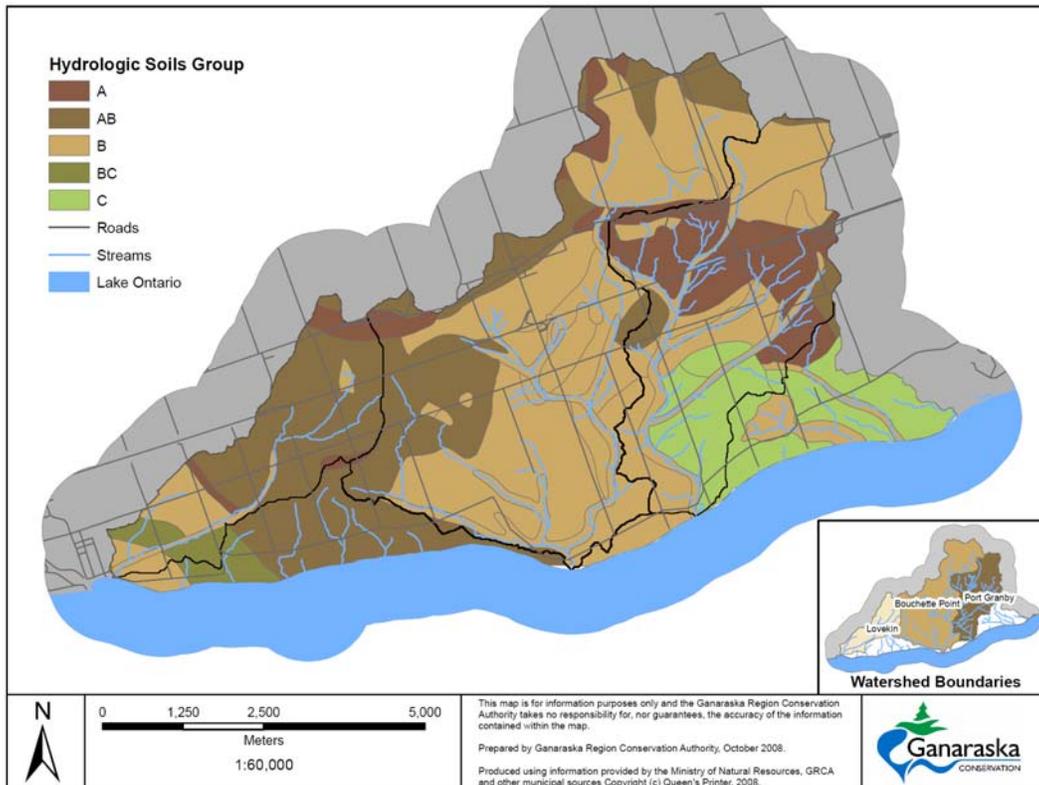


Figure 3.11: Hydrologic soils group

3.2 GROUNDWATER

The movement and location of groundwater in the subsurface are controlled by land cover, sediment types and topography. Porous surficial materials generally comprise groundwater recharge areas. Rainfall and snowmelt percolate through these sediments and replenish the aquifers that form important groundwater supply sources for many watershed residents. In addition these aquifers contribute water to streams of the three watersheds through groundwater discharge. Groundwater discharge contribution during periods of time without precipitation and during critical summer low flow periods is essential in sustaining the ecosystem of the watershed. Areas of the watershed that lack porous surficial materials experience higher surface runoff than groundwater recharge.

3.2.1 Aquifers and Groundwater Flow

Overburden deposits in the three watersheds play an important role in the regional drainage and groundwater recharge patterns. Bedrock valleys and bedrock topography do not control creek drainage and groundwater flows in the area. Similar to other watersheds, the thickness of the overburden dictates the distribution of the overburden and bedrock aquifers and the specific importance of each type of deposit as a source of water supply. Grouped as hydrostratigraphic units, geologic units are categorized based on their relative capacity to store and transmit different amounts of water. As outlined by Widaatalla and Peacock (2007), the following geological units in the three watersheds are defined with their respective hydrostratigraphic units.

- Glacial Lake Deposits comprised of sand and gravel that form a discontinuous unconfined shallow aquifer at surface
- Glacial till aquitards comprised of Bowmanville Till (leaky aquitard)
- Clarke Deposits that are mainly sand and gravel (aquifer)
- Port Hope Till that is mainly a clayey silt till (aquitard)
- Deep coarse sand and gravel aquifer (equivalent to Scarborough Formation)
- Fractured limestone of the Simcoe Group (in some areas fractured shale from the Georgian Bay Group) that forms the weathered bedrock aquifer.

Higher rates of infiltration generally occur in the more permeable and thick coarse-grained deposits associated with the glacial lake sediments. Recharge is reduced in areas that are dominated by Bowmanville Till. Depth to the watertable in the northern area of the watershed varies and is generally deeper than areas along the Lake Ontario shoreline. Aquifer thickness and the depth to the watertable can vary depending on location, though the watertable is generally found at depths of less than 5 m below ground surface in the southern portion of the watershed (Morrison Environmental Limited 2004).

The movement of groundwater in the area is a subtle reflection of local topography and drainage as interpreted from the Ministry of the Environment Water Well Record data. The lateral movement of groundwater in the watershed

occurs from topographic highs to topographic lows. The dominant regional groundwater flow direction is southerly toward the Lake Ontario basin. Figure 3.12 shows the watertable contour elevations in the watershed. This figure was generated as an output from the regional Oak Ridge Moraine groundwater model (Earthfx Incorporated 2006).

The sand and gravels of upper Iroquois Plain form a shallow aquifer, which represents a potential source of well water into the majority of central and southern watershed areas. These sands probably contribute significantly to the flow regime of local streams (Gartner Lee Limited 1976). A number of wells located in the Iroquois Plain get their water from sand and gravel aquifers buried at depth in the glacial till. In most cases these aquifers only appear to be lenses and are not very extensive in size.

The majority of these wells were drilled in the till layer and most like in sand lenses in the Bowmanville till. Some wells are also penetrating the upper part of the lower sediments (Clarke Deposits). In the south, wells are screened in the fractured bedrock aquifer (Figure 3.13).

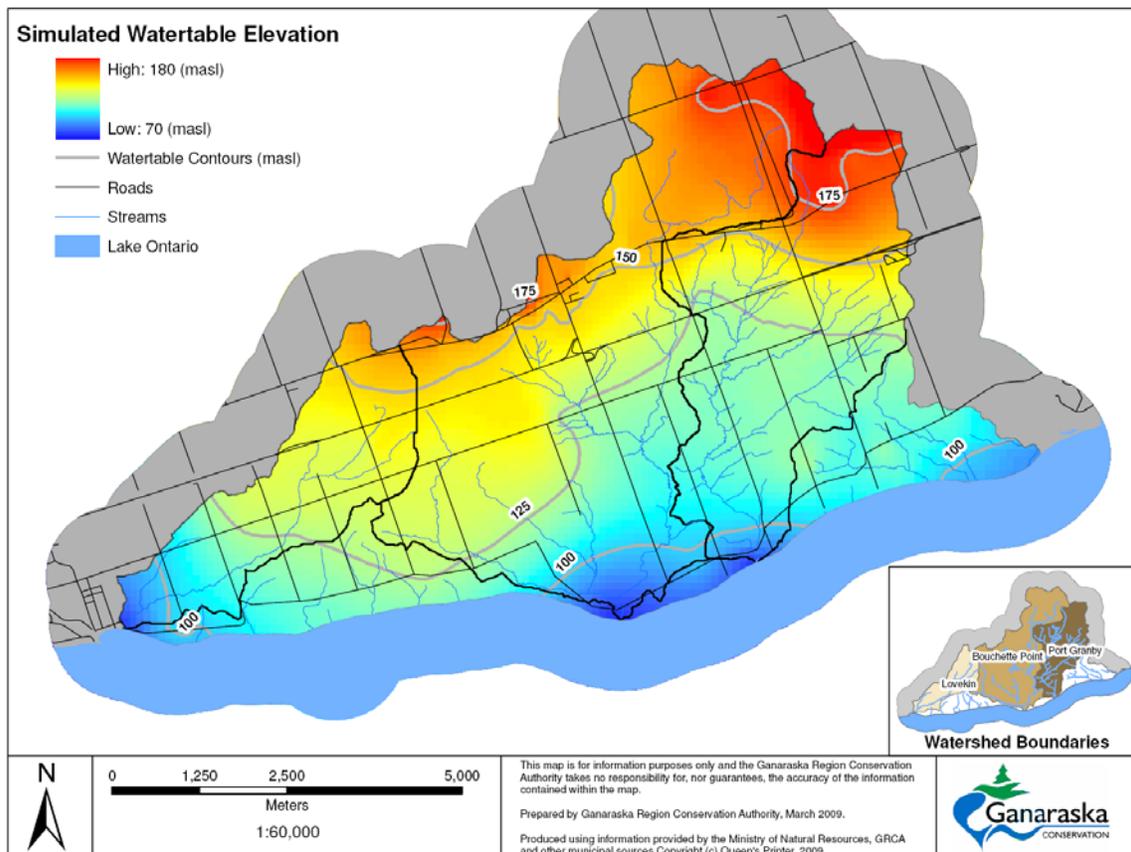


Figure 3.12: Simulated watertable

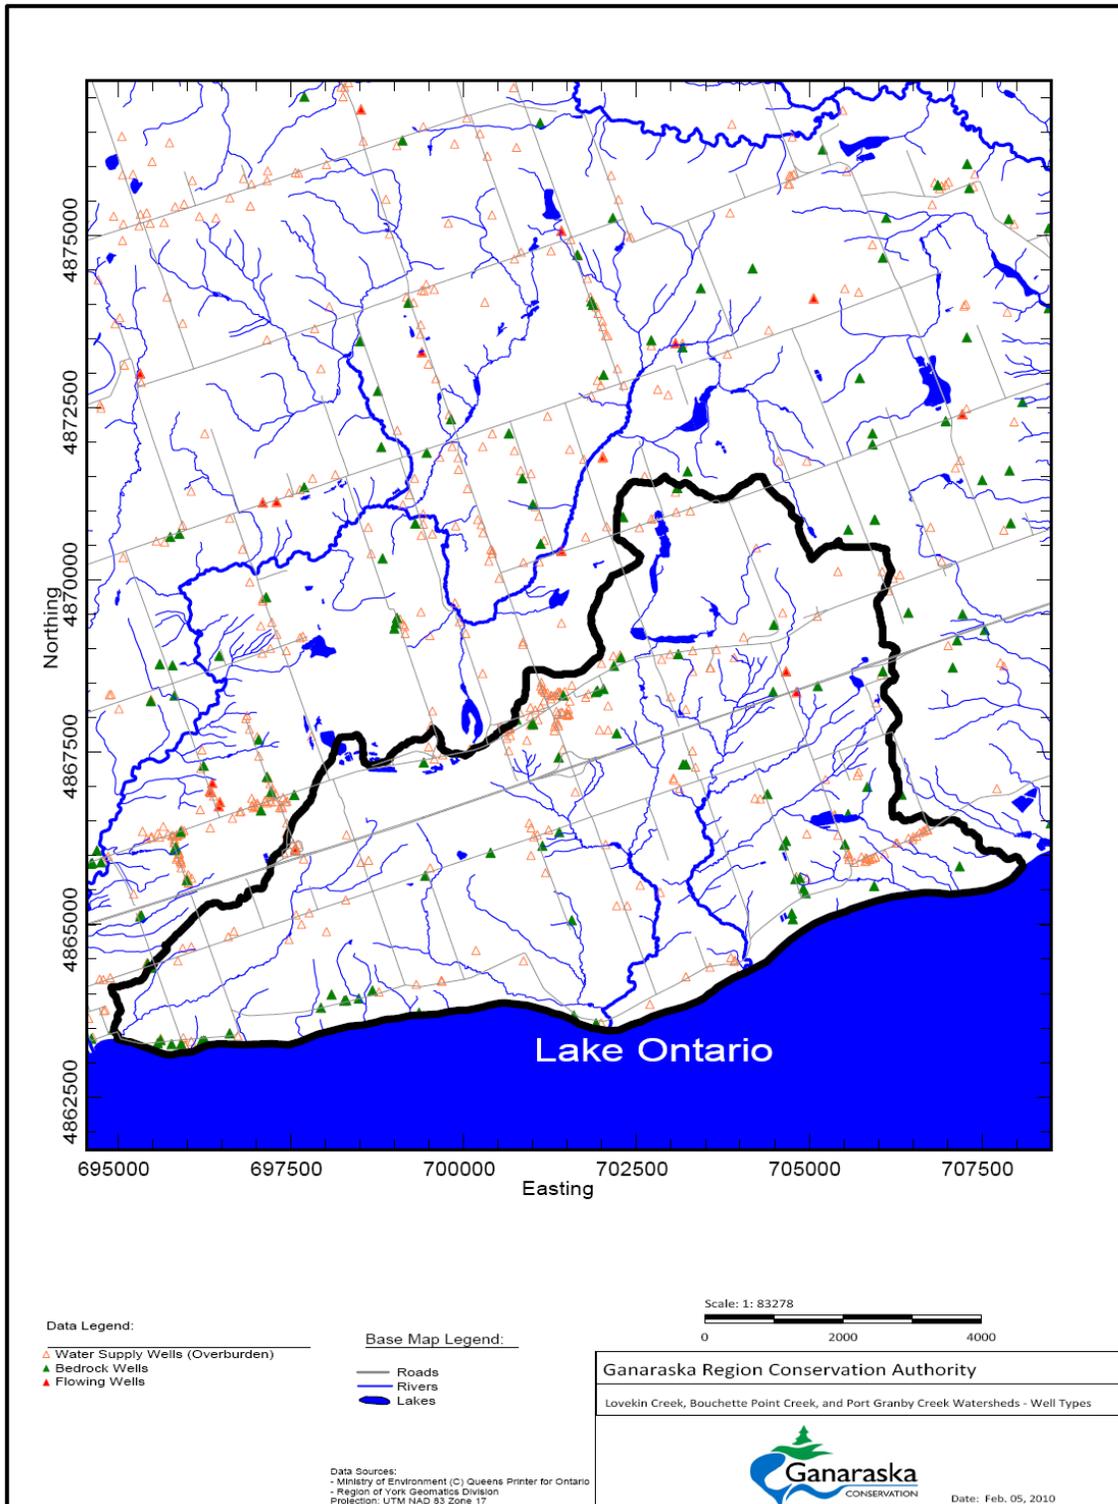


Figure 3.13: Water well types

3.2.2 Groundwater and Surface Water Interactions

Understanding groundwater and surface water interactions at both a regional and watershed scale has recently seen an increase in interest from all areas of watershed science. Gains and losses of water in a stream can be analyzed using stream temperature, baseflow, fish communities, and the presence of stream vegetation and aquatic organisms. However, certain techniques are more appropriate at various spatial scales or in order to answer certain questions.

Groundwater Recharge and Discharge

Recharge is the process by which groundwater is replenished, and it occurs by the vertical seepage of water through soil and unsaturated soils to an area of saturation. Rain and snowmelt are the major sources of recharge, however amounts of recharge and the rate at which it occurs depend on surficial soil composition, land use and topography (Widaatalla and Peacock 2007).

Discharge is the opposite of recharge; in this process, groundwater is normally found in an upward gradient leaving the system through porous materials as springs or flow into surface water features such as streams, rivers, lakes and wetlands.

The areas of the Iroquois Plain that contain glacial lake deposits of silt and sand represent the highest recharge areas. Areas containing Bowmanville Till have reduced recharge potential. The spatial distribution of applied recharge to the Oak Ridges Moraine regional groundwater model is shown in Figure 3.14. Many factors affect the distribution groundwater recharge rates in the watershed.

- The presence of coarse sand and gravel sediments at the surface
- Distribution of thick overburden contributes to higher recharge rates (Figure 3.15)
- Topographic changes which created steep slopes that favour runoff.

Potential discharge areas are shown in Figure 3.16. This figure was created by comparing the digital elevation model (DEM) and the groundwater level from wells tapping into the first aquifer encountered in different parts of the watershed. These potential groundwater discharge locations are mainly located in the valley areas and areas of geological transition of the watershed. These discharge areas provide baseflow to the three creeks, which is critical in maintaining stream flows during times where precipitation is minimal or does not occur.

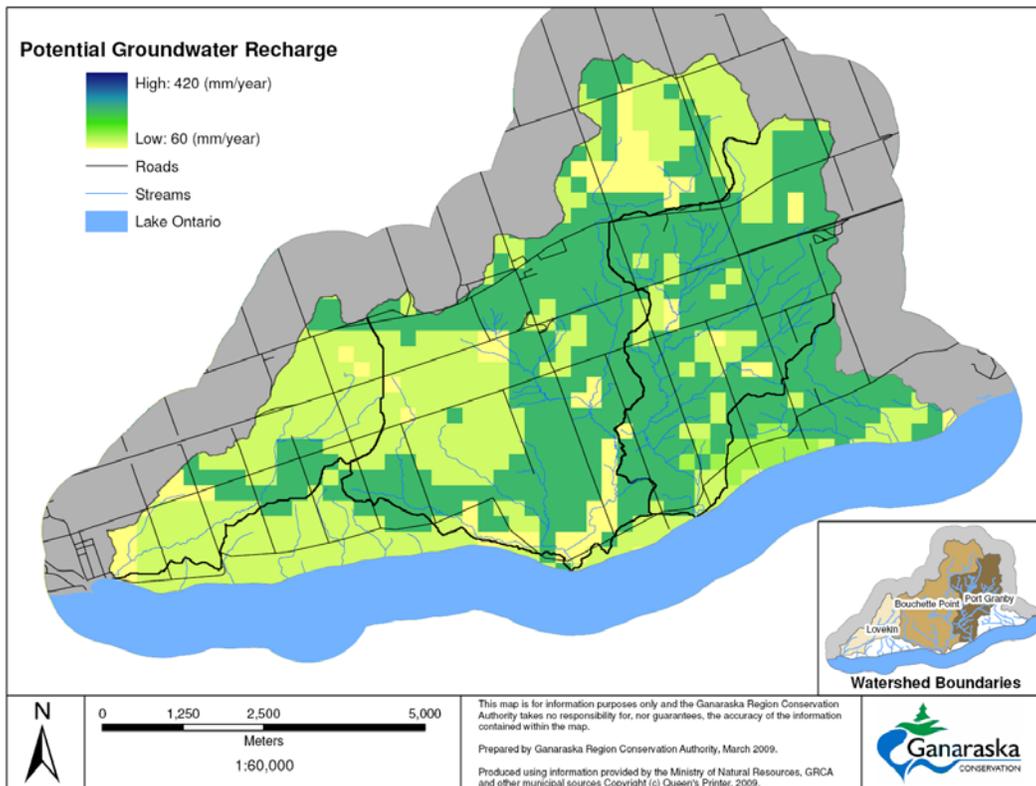


Figure 3.14: Potential groundwater recharge

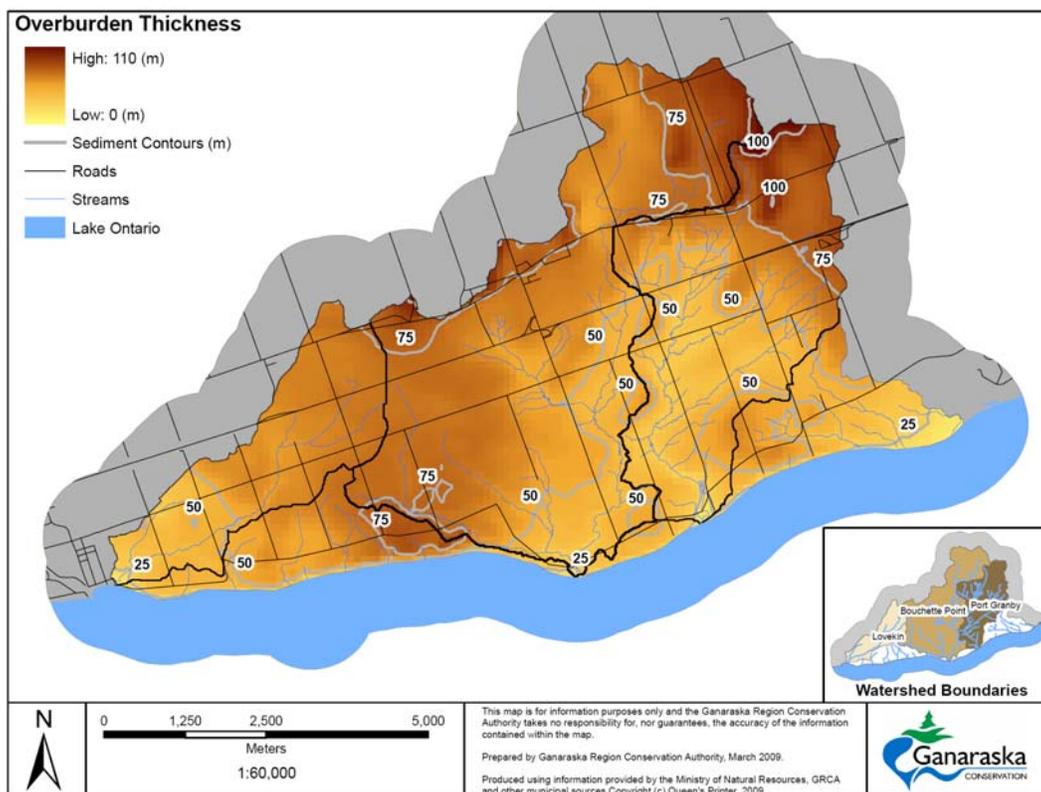


Figure 3.15: Overburden thickness

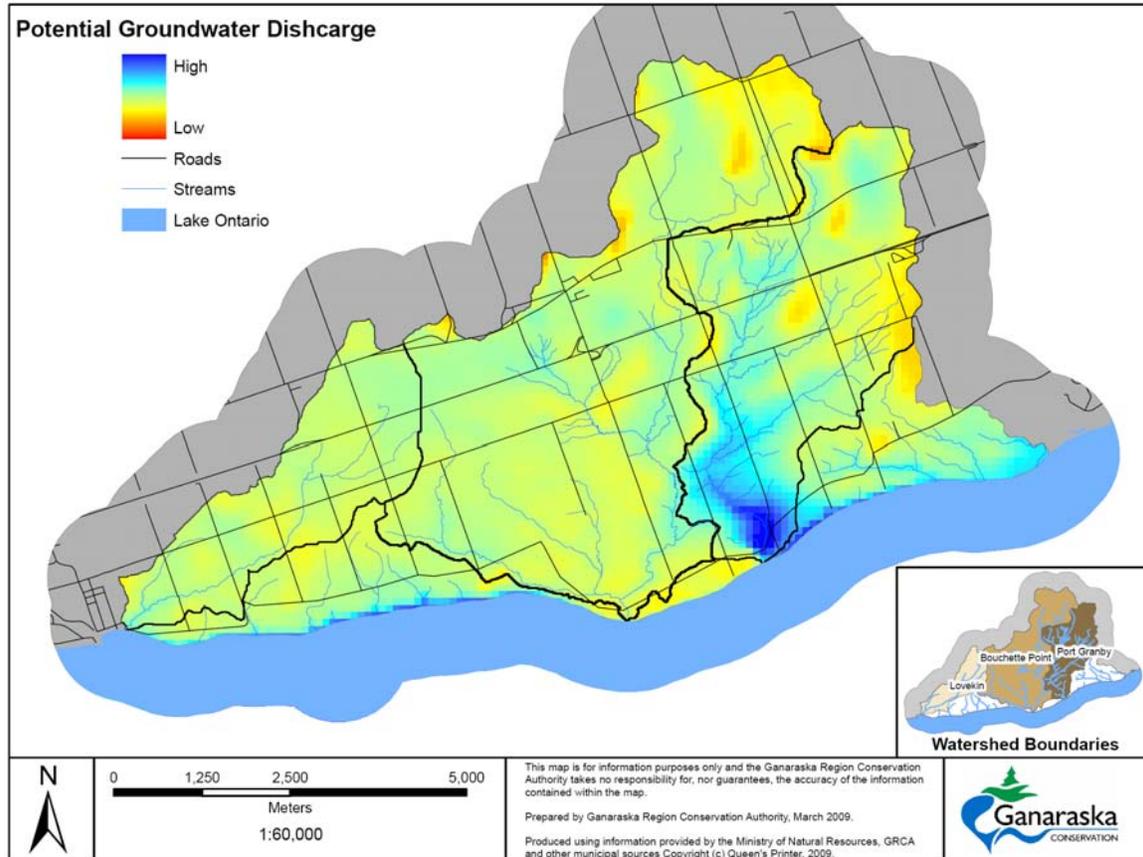


Figure 3.16: Potential groundwater discharge

Significant Groundwater Recharge Areas

Potential groundwater recharge and discharge areas have been identified for the regional study area. However, groundwater recharge areas can be evaluated based on methodologies used to define their significance. In 2009 this evaluation was done under the Drinking Water Source Protection program, directed by the *Clean Water Act, 2006*. The evaluation of significant groundwater recharge areas was done in the Trent Conservation Coalition Source Protection Region, referred to as the study area herein, and is described in a report entitled *Trent Source Water Protection Study Recharge Study* (CAMC-YPDT 2009). Note that the study was completed at a scale larger than the Ganaraska Region Conservation Authority and the three watersheds.

Methodology

The Technical Rules (Ontario Ministry of the Environment 2009) used in the Drinking Water Source Protection program define significant groundwater recharge areas by one of the following two criteria. A significant groundwater recharge area is where:

- The annual recharge rate is at least 1.15 times the annual recharge rate of the area under consideration; or

- The annual recharge volume is at least 55% of the annual water budget surplus (precipitation minus actual evapotranspiration) of the area under consideration.

Significant groundwater recharge areas in the study area were delineated using the second (water budget surplus) method. The delineation process consisted of an analysis of climate, estimation of recharge rates, and calculation of the water budget surplus and the threshold recharge volume.

Climate Analysis

Climate affects groundwater recharge because precipitation and evapotranspiration rates affect the amount of water available to recharge the groundwater system. Data from 71 climate stations across the study area were used to illustrate the interpolated 30-year precipitation and temperature averages. Given the significant variability observed in the precipitation and temperature averages, it was deemed inappropriate to calculate the water budget surplus using a set of climate data from a single station. Thus, taking into account the location of climate stations, the interpolated precipitation and temperature data, general physiography, and the location of watershed boundaries, the study area was divided into northern, central and southern climate zones. The Ganaraska Region Conservation Authority lies in the south climate zone, represented by the Cobourg Sewage Treatment Plant climate station.

Recharge Rates

Recharge rates across most of the Paleozoic Area of the study area were estimated from a three-dimensional regional groundwater flow model developed by the Conservation Authorities Moraine Coalition (Earthfx Incorporated 2006). The model provided estimates of annual recharge rates for most of the quaternary soil types in the study area. These estimates were related to the surficial geology in the study area using surficial geology mapping from the Ontario Geological Survey.

Water Budget Surplus

The water budget surplus is the difference between the precipitation and actual evapotranspiration plus runoff in a given area over a particular time period; this value represents the amount of water that is available to recharge groundwater. The water budget surplus was calculated by subtracting the annual actual evapotranspiration - calculated using Thornthwaite-Mather (1957) and available soil moisture - from the precipitation averages in each of three climate zones in the study area. The water budget surplus for the south climate zone is 353.7 mm/year.

Delineation of Significant Recharge Areas

Significant groundwater recharge areas were delineated by calculating a threshold recharge rate, above which an area would be considered a significant

groundwater recharge area. In accordance with the selected approach, this threshold value was calculated as 55% of the water budget surplus for each climate zone. The threshold value for the south climate zone is 194.5 mm/year. Significant groundwater recharge areas in the study area were delineated using the threshold values. However, two further methodologies were considered to refine the delineation of significant groundwater recharge areas, shown in Figure 3.17.

Areas with shallow groundwater, typically found in low lying valleys, are unlikely to contribute any significant groundwater recharge. Any recharge occurring within these lower-lying areas would move laterally in the shallow groundwater system and discharge in adjacent streams and wetlands. Thus, areas where the water table was less than 2 m below the ground surface were removed from the delineation of significant groundwater recharge areas. After removing areas with shallow groundwater, a number of small areas (less than 0.01 km²) remained in the delineation. These areas were removed in consideration of the resolution of the input data (i.e., surficial geology mapping and water table mapping) used in the delineation.

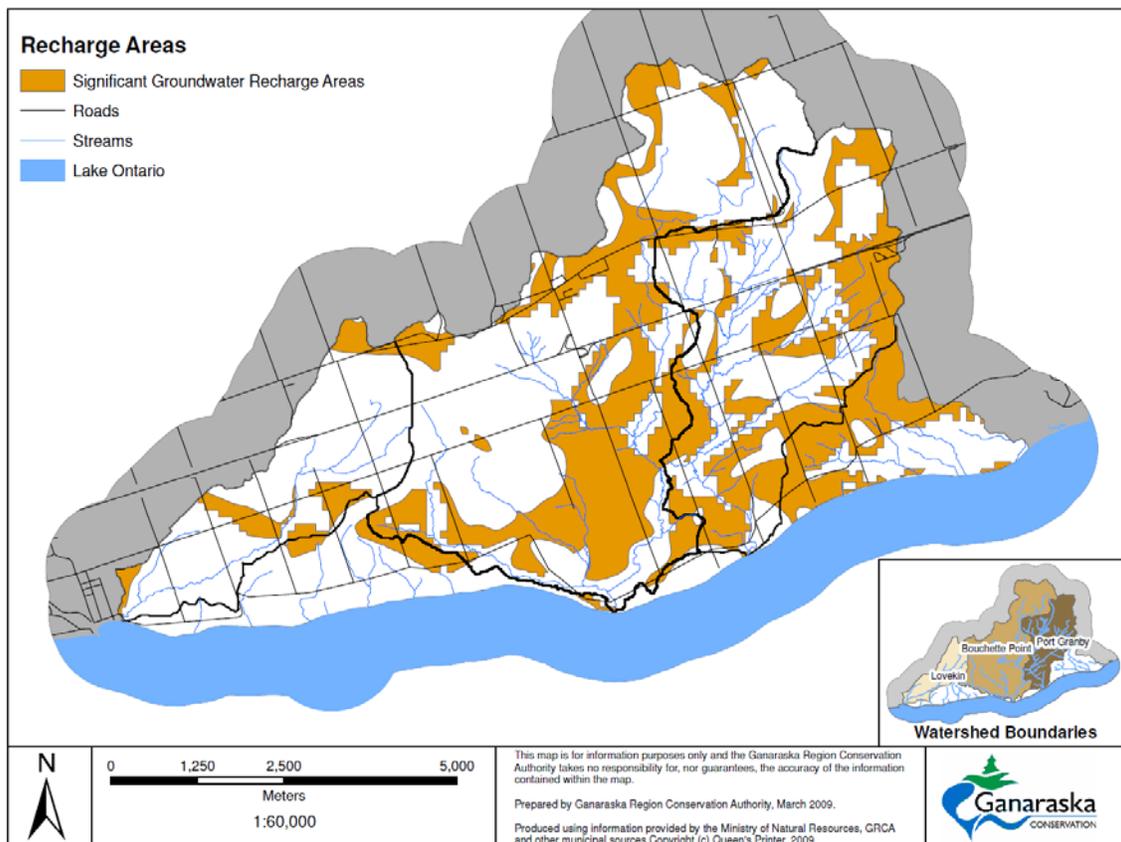


Figure 3.17: Significant groundwater recharge areas

Baseflow

The study and understanding of baseflow in a watershed is important in watershed management since water demand during these low flow periods can cause stress on aquatic ecology. Baseflow for the purpose of this document is defined as stream discharge during periods when storm flow has ceased and stream flow consists entirely of delayed sources of flow. However, depending on the purpose of the study, baseflow or low flow can also be interpreted more narrowly as the flow during a defined period of prolonged dry weather (Hinton 2005).

Baseflow is a result of groundwater discharge to a stream notwithstanding other contributors to stream flow such as delayed surface water flows from ponds, wetlands, and storm sewers as well as discharges from waste water treatment plants. Groundwater discharge to streams is generally controlled by topography and the geological and hydrogeological characteristics of the watershed. Baseflow provides the majority of the flow to streams during dry periods and therefore affects the quantity and quality of surface waters. In the Ganaraska Region Conservation Authority streams are under baseflow conditions approximately 70% of the time. Areas where groundwater discharges to streams (upwelling areas) provide cooler water temperatures, making these areas attractive refuges and suitable habitats for aquatic species. For instance, groundwater discharge areas provide places of refuge from warm stream temperatures, and fish tend to take advantage of these locations (Power et al. 1999).

Baseflow in the watersheds of the regional study area is derived mainly from groundwater discharge associated with the glacial Lake Iroquois shoreline physiographic region as well as some local recharge and discharge areas. During baseflow conditions surface water quantity is entirely determined by groundwater discharge, due to minimal influence or absence of delayed flows from ponds or storm water outfalls. Surface water quality is also affected by the quantity and quality of groundwater entering the system as baseflow.

Baseflow Survey Methods

In the summer of 2009, baseflow was surveyed at 65 locations throughout the West Lake Ontario watersheds¹. This study area included seven small named creeks and several minor unnamed creeks, all of which drain to Lake Ontario between Ward 1, Municipality of Port Hope and Newcastle. Measurements were taken using Pygmy flow meters with the Area-Velocity method, while volumetric gauging was used at perched culverts as defined by Hinton (2005). Individual watersheds were selected and each was monitored in a single day to avoid any day to day variations in baseflow.

¹ The West Lake Ontario watersheds include the regional study area, but include four other watersheds: Wesleyville Creek, Port Britain Creek, Brands Creek and Little's Creek.

Baseflow discharge from each sample site was used to determine the gain or loss observed between sites by subtracting the discharge observed upstream. This data was then used to show gains and losses per unit area of subcatchments and per unit length of flowing channels in subcatchments.

Subcatchment areas were delineated using the Ministry of Natural Resources version one flow direction grid in combination with the geo-referenced locations of baseflow sampling sites. The lengths of all channel segments with observable flow were measured from sample site to sample site immediately upstream by adding the attribute lengths of stream segments. If there was no site upstream of a site, it was recorded as a headwater site and the stream channel was measured to the known or estimated source of flow. Decisions were made based on known geological and hydrogeological characteristics of the watershed to determine the exact locations of sources and changes in baseflow contributions.

Baseflow Survey Results

Analysis of field sampling indicates that the majority of the baseflow is gained or lost from specific locations, attributable to their geological and hydrogeological features. Local land use may also affect baseflow quantity and quality. The upper portion of the Lake Iroquois Shoreline physiographic region has a dramatic effect on baseflow occurrences and distribution in some locations due to its coarse surficial sediments and dramatic elevation changes. Underlying geologic features control both the rate and direction of groundwater recharge and flow as it moves toward stream channels. The most important geologic features are the Bowmanville Till (equivalent to Newmarket Till), which acts as an aquitard that slows groundwater flow downward and the sandy aquifers that allow water to move upward and/or laterally towards surface water at lower elevations.

The majority of the baseflow observed in the small streams of West Lake Ontario watershed is derived from groundwater discharge along segments that flow out of the porous surficial geologic materials associated with the Lake Iroquois Shoreline and other glacial lake deposits. That is, the streams that flow in surficial deposits that are dominated by porous geologic materials such as sands, gravels and silty sands (surficial aquifers) eventually cut through to less porous materials (aquitard) where groundwater is forced to move laterally toward lower gradients and into surface water channels (Figure 3.18). Porous surficial geology in and near these watersheds allows precipitation to infiltrate the ground recharging local aquifers. There are also wetland areas that hold back water, allowing slow groundwater recharge.

Port Britain Creek has a larger drainage area (35.93 km²) as it drains both parts of the Lake Iroquois physiographic region. It is noticeable that the upper catchments of the watershed have higher baseflow contribution compared to the lower catchments (Figures 3.18 and 3.19). This is mainly due to the presence of surficial sandy sediments (Lake Iroquois shoreline) that promotes recharge and a shallow unconfined aquifer above the Bowmanville Till. The shallow aquifer is

sustained by local groundwater recharge and the underneath till aquitard promotes later groundwater flow in these catchments. In addition, the southern groundwater divide of the Ganaraska River watershed (northwest of Ward 1, Municipality of Port Hope) extends most likely south of the surface water divide (Ganaraska Region Conservation Authority 2007). There could be movement of groundwater via the Clarke deposits and weathered bedrock into the adjacent watersheds. Some of this groundwater contribution is most likely appearing as groundwater discharge in areas of thin Bowmanville Till aquitard in the upper and middle catchments of Port Britain Creek and other watersheds.

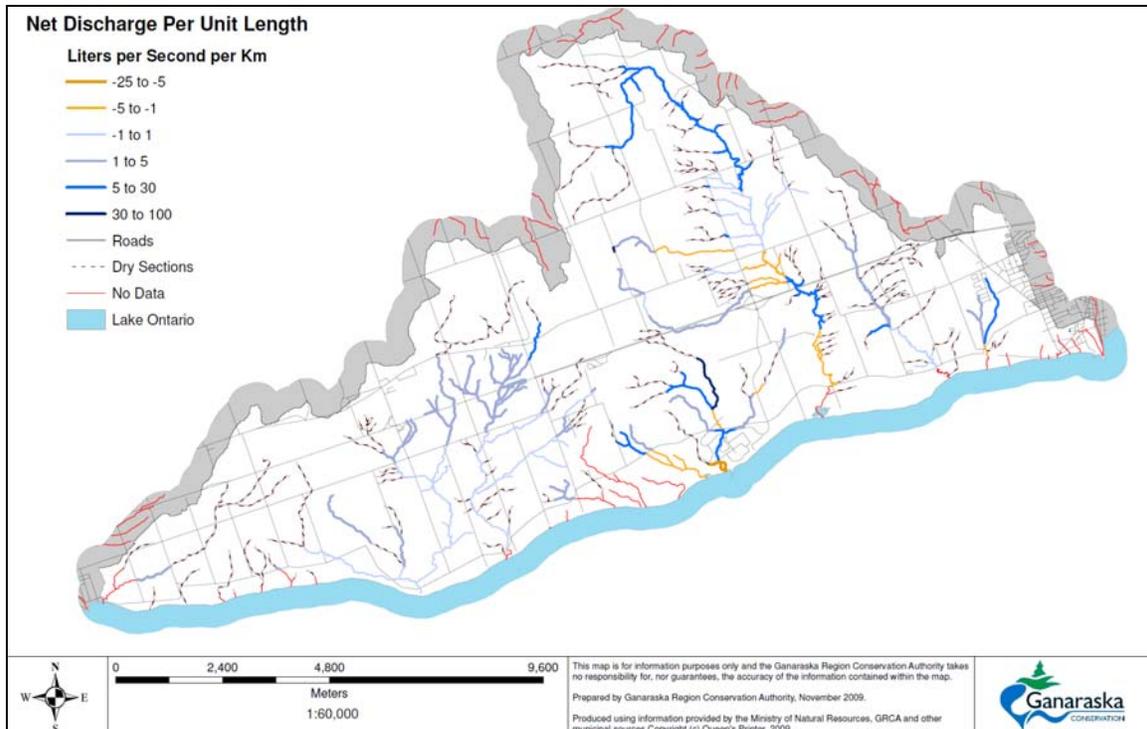


Figure 3.18: Net discharge per unit length

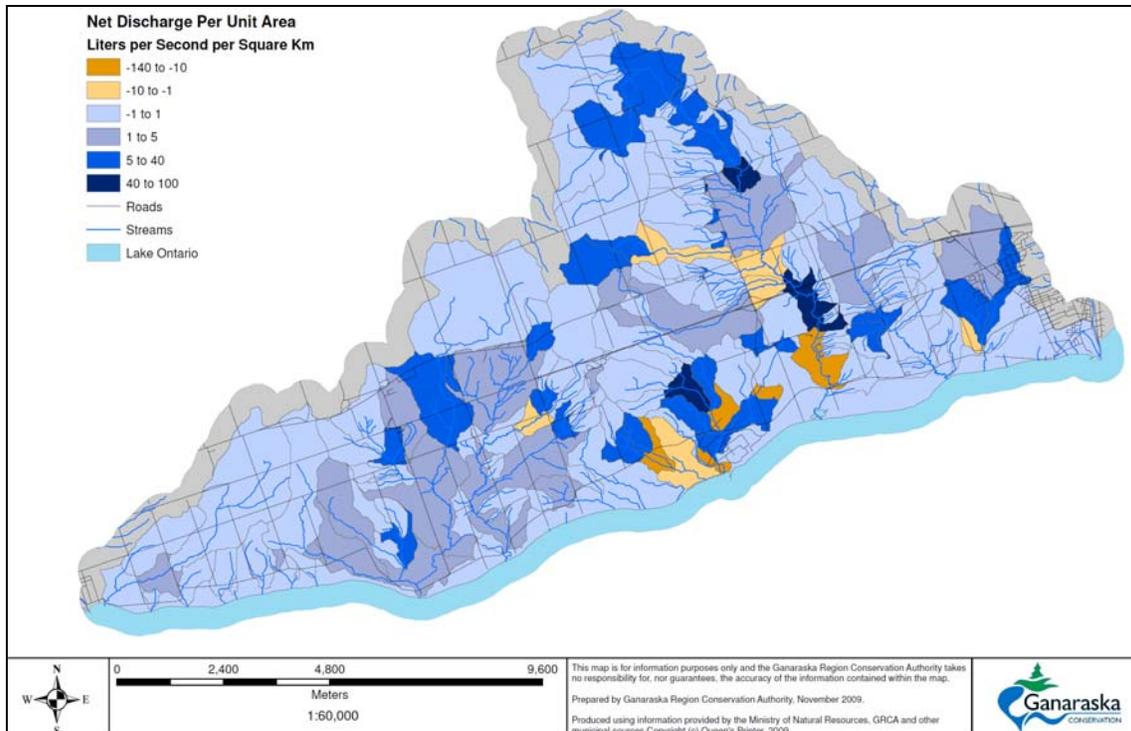


Figure 3.19: Net discharge per unit area

Smaller watersheds are particularly vulnerable to water stress as they are dependant on baseflow during the summer to maintain water flow. The Lovekin Creek watershed is only 7 km² and dominated by the Newmarket Till, a non-water producing aquitard. As a result, Lovekin Creek was reduced to a very small flowing section (0.94 km) where flow was measured at 1.6 litres per second (L/s). During the study period, this small quantity of baseflow measured at 1 km upstream of the outlet, evaporated in the short distance it traveled to Lake Ontario. Smaller streams are also potentially more vulnerable to deteriorating water quality during low flow periods. There is simply less water to dilute any contamination that enters the surface water. In Lovekin Creek, water quality parameters likely appear at higher concentrations due to the low baseflow and the dominant agricultural land use.

Conclusion

The larger West Lake Ontario watersheds (e.g., Port Britain Creek and Wesleyville Creek) have greater baseflow due to the presence of larger areas of groundwater recharge and subsequent discharges associated with porous surficial geology. The headwater area of Port Britain Creek is close to the easterly flowing Ganaraska River. Due to the overall topography sloping north to south in this location, it is believed that the groundwater catchment of Port Britain Creek extends into the Ganaraska River watershed. This means that deeper aquifers allow groundwater to flow across the surface water boundary, some of which emerges as groundwater discharge in Port Britain Creek. As water moves vertically through the surficial deposits, it eventually encounters a lower aquitard

layer such as the Bowmanville Till and is forced to flow more laterally towards valleys due to the low permeability of the till layer. As the sandy layers become thin and the aquitard becomes more exposed, the groundwater reaches the surface at a discharge point and runs into stream channels. As the streams flow south to Lake Ontario, they cut down through the sandy layers to expose more of the aquitard, moving the discharge locations further upstream.

It is evident from the analysis that most of the streams lose some baseflow in wetlands, marshes, and sandy beaches before reaching Lake Ontario, such as the case in Wesleyville Creek (Figure 3.18). Most of the minor streams were disconnected from Lake Ontario during the study period. Of the major streams in this area that were measured at the lakeshore, the baseflow was significantly reduced. As the streams near the lakeshore, they enter a slow moving wetland or marsh area. Beach morphology results in a build-up of sediments along the lakeshore, which hold back the wetlands and cut-off many of the minor streams from the lake. Some water may also flow through the porous beach sediments.

Even though each of these smaller watersheds is acting as an individual watershed from a surface water perspective, these watersheds are most likely interconnected through the groundwater system. For example, figures 3.18 and 3.19 shows that most of the catchments with higher baseflow contributions are laterally orientated from northeast to southwest mimicking regional groundwater flow directions (Figure 3.12).

The most western watersheds (Lovekin Creek, Bouchette Point Creek, and Port Granby Creek) have lower baseflow contributions as they are draining the lower portion of the Lake Iroquois physiographic region (the till plain). There is little contribution from the shallow aquifer and the deep aquifers are most likely interconnected with Lake Ontario at lower elevations (below the Port Hope Till).

3.3 GROUNDWATER ANALYSIS

Groundwater analysis allows watershed managers to understand groundwater systems, and where and how it contributes to surface water systems. In addition, by understanding the groundwater system, drinking water sources and non-potable water uses can be maintained in a manner that protects the natural environment and the groundwater resource.

3.3.1 Groundwater Vulnerability

Groundwater vulnerability has been evaluated for the regional study area through the Drinking Water Source Protection program, directed by the *Clean Water Act, 2006*. The evaluation of groundwater vulnerability was carried out in the Trent Conservation Coalition Source Protection Region and is described in a report entitled *Groundwater Vulnerability Assessment - TCC Source Protection Region* (AECOM 2009). Note that the study was completed at a scale larger than the Ganaraska Region Conservation Authority and the regional study area.

The objective of identifying groundwater vulnerability is to address groundwater source protection. Delineations are also intended to recognize different uses of water in a regional setting, including shallow and deep private wells, ecological resources and recharge/discharge areas. Such delineations also serve as the basis for protection efforts for these water resources. Preliminary aquifer vulnerability areas in the Ganaraska Region Conservation Authority have been delineated through earlier municipal groundwater studies (Morrison Environmental Limited 2004).

Methods

The Technical Rules (Ontario Ministry of the Environment 2009) used in the Drinking Water Source Protection program list four acceptable methods to be used for the assessment of groundwater vulnerability. Two of the four acceptable methods were selected for use and these have been used in previous studies throughout the Ganaraska Region Conservation Authority.

- Intrinsic Susceptibility Index (ISI) – A score or index value is given to each well (e.g., Ministry of the Environment Water Well Record Database). This index or score at each well is then interpolated between wells to produce a vulnerability map. This method takes into account the soil type and thickness above the aquifer, and the static water level in the well.
- Aquifer Vulnerability Index (AVI) – A score or index value is assigned based on mapping products (e.g., depth to aquifer, soil type and thickness) that reflect the relative amount of protection provided by physical features that overlie the aquifer. This method, unlike the ISI, does not take into account water table or water level information.

Scoring of groundwater vulnerability is as follows:

	ISI or AVI Range
High Vulnerability	0 to < 30
Medium Vulnerability	30 to < 80
Low Vulnerability	> 80

Results for the Paleozoic Study Area

Using the ISI method, shallow aquifers in areas north of the Oak Ridges Moraine are generally of high or medium vulnerability. Shallow aquifers in the centre of the Oak Ridges Moraine and the Iroquois shoreline appear to be slightly more vulnerable than in the north and south flanks of the Oak Ridges Moraine. This is expected since the deposits are largely unconfined coarse-textured material. However, the AVI method produced more conservative results along the centre of the Oak Ridges Moraine, whereas the ISI method produced results more conservative in the rest of the Paleozoic Study Area.

In general, the AVI method produced more conservative results in the Oak Ridges Moraine since the method is based on geological characteristics, whereas the ISI method created results less conservative given there are fewer wells, which are needed for analysis, in the area of study on the Oak Ridges Moraine. As a result, and after Ontario Ministry of the Environment approval (for the purpose of the Drinking Water Source Protection program, the resulting ISI and AVI maps were merged to create a conservative groundwater vulnerability map for the Ganaraska Region Conservation Authority that can be used to determine groundwater vulnerability for the regional study area (Figure 3.20). Please note that the analysis in the regional study area is influenced primarily by the ISI analysis.

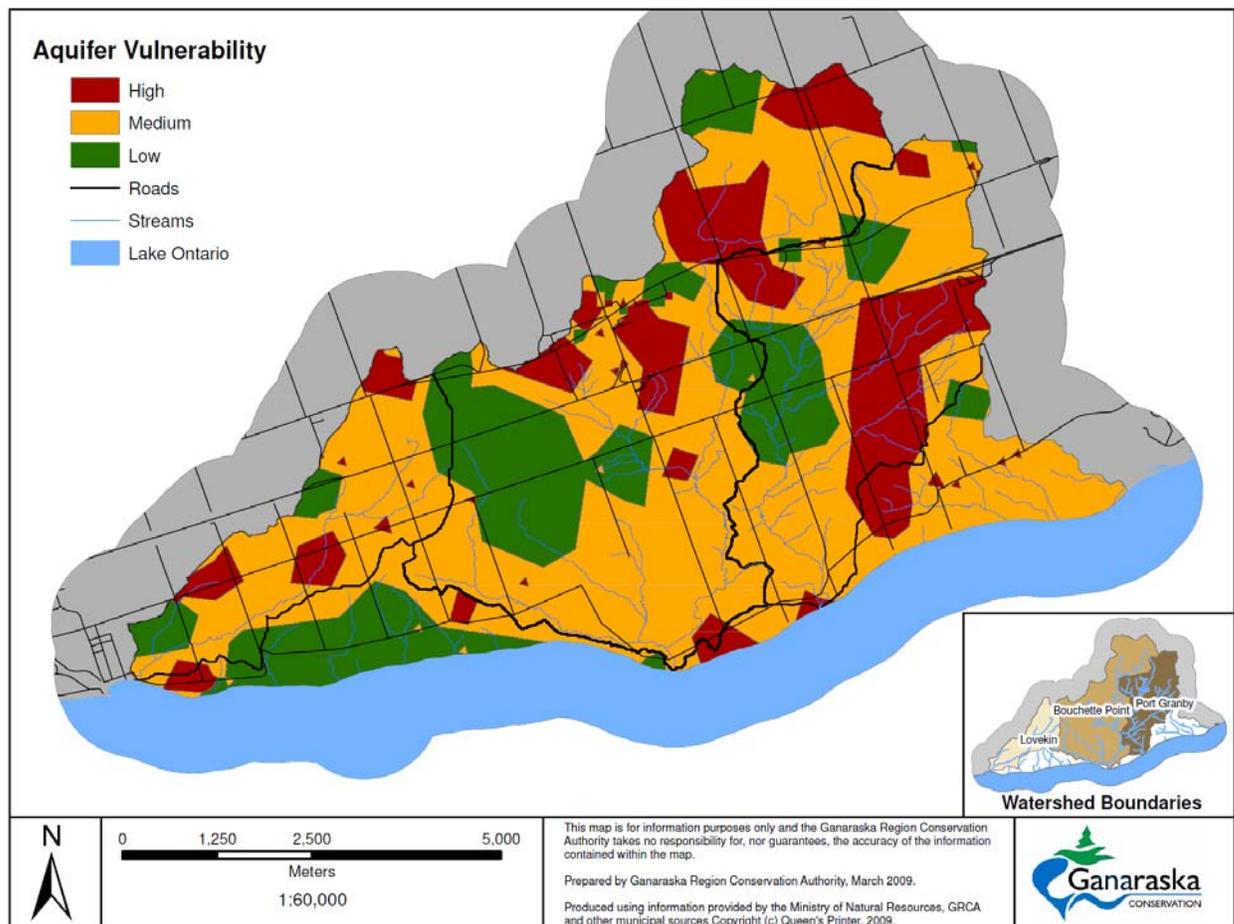


Figure 3.20: Groundwater vulnerability

3.4 SURFACE WATER

Surface water flows and occurs on the surface of the ground. Water enters the surface via precipitation and groundwater discharge, and it moves through water flow, groundwater recharge or transpiration. The following section describes surface water characteristics, surface water flows and water quantity.

3.4.1 Drainage Basin Characteristics

The three main watersheds originate in the Iroquois Plain at an elevation of approximately 250 masl. The drainage areas and characteristics of these tributaries are listed in Table 3.5.

Table 3.5: Drainage areas

Stream/Tributary	Drainage Area (km²)	Main Channel Length (km)	Total Fall (m)	Average Gradient (m/km)
Lovekin Creek	7.18	6.75	112.49	16.66
Bouchette Point Creek	23.02	10.77	132.67	12.32
Port Granby Creek	13.31	8.42	132.26	15.71

A drainage basin is comprised of tributary streams that combine into a main channel. Several methods have been used for ordering the tributary streams in a drainage network, however the Horton-Strahler method is widely used (Wetzel 2001). The smallest permanent stream is designated as the first order, and the confluence of two first-order streams creates a second order stream. This increase by confluence occurs until the system outlets, to a specified point, which in this case is Lake Ontario. Lovekin Creek is a second order stream, while Bouchette Point Creek and Port Granby Creek are both fourth order streams. In all watersheds, first order streams are the dominant stream order. Figure 3.21 indicates the stream order of each of the three watersheds. In addition to these stream orders, many intermittent and ephemeral streams contribute to the flows and habitat of each creek during differing times of the year.

As the three watersheds flow through the landscape, the local watershed characteristics change as a result of human influences. Impervious is one such landscape characteristic that alters the drainage response of a watershed. Imperviousness areas are areas that are hardened through paving (e.g., parking lots and roads) and development (e.g., buildings and infrastructure). These land cover types prevent water from infiltrating through the ground, increase surface runoff rates, and alter pathways of surface water (i.e., drainage through storm sewers to a stream). Areas of increased imperviousness are located primarily around Newtonville and scattered throughout the three watersheds. However, according to Ecological Land Classification, imperviousness as it relates to urban areas, roads and rural development is limited.

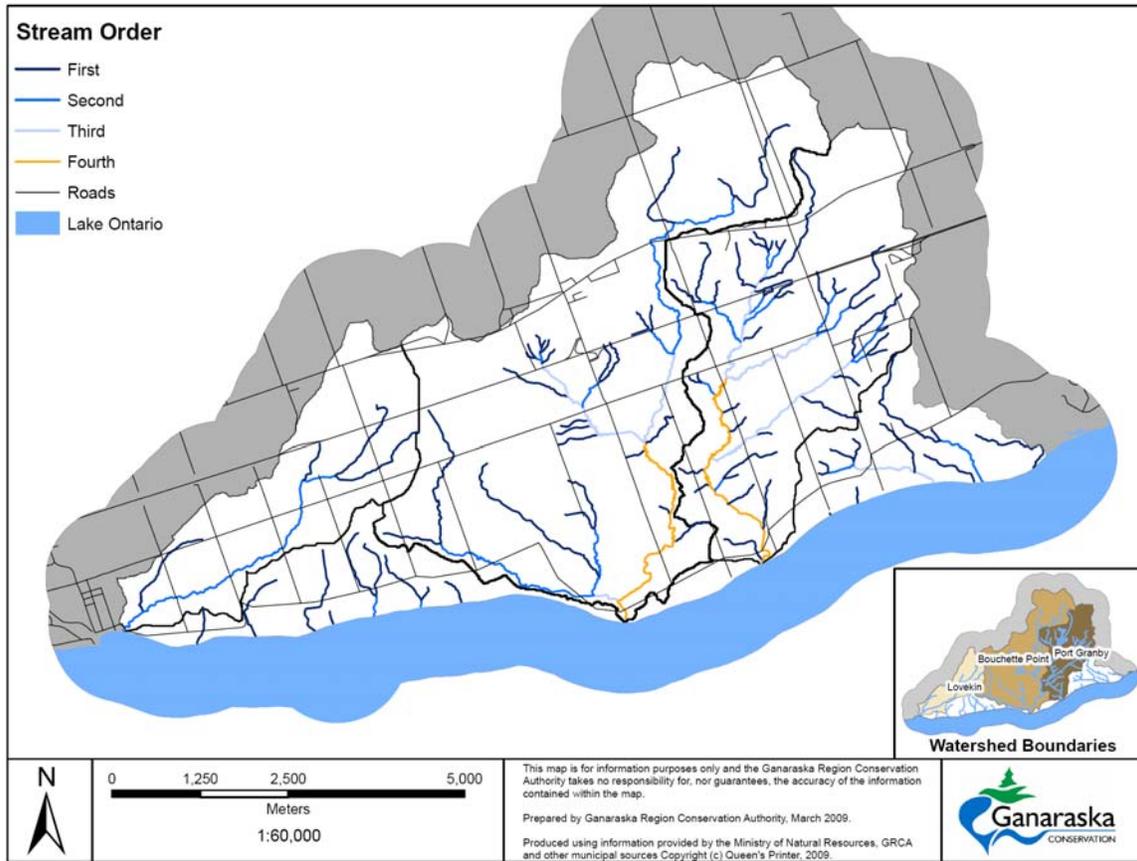


Figure 3.21: Stream order

3.4.2 Dams and Water Control Structures

It is unknown how many private dams and water control structures are on Lovekin Creek, Bouchette Point Creek and Port Granby Creek. Historically grist or sawmills existed on Lovekin Creek, Bouchette Point Creek and Port Granby Creek, therefore remnant foundations may exist. Figure 3.22 shows the locations of dams and water control structures in Northumberland County.

3.4.3 Stream Gauge Stations

Lovekin Creek, Bouchette Point Creek and Port Granby Creek are not monitored through the Water Survey of Canada stream gauge system. As a result historic or long term water flow information is unavailable.

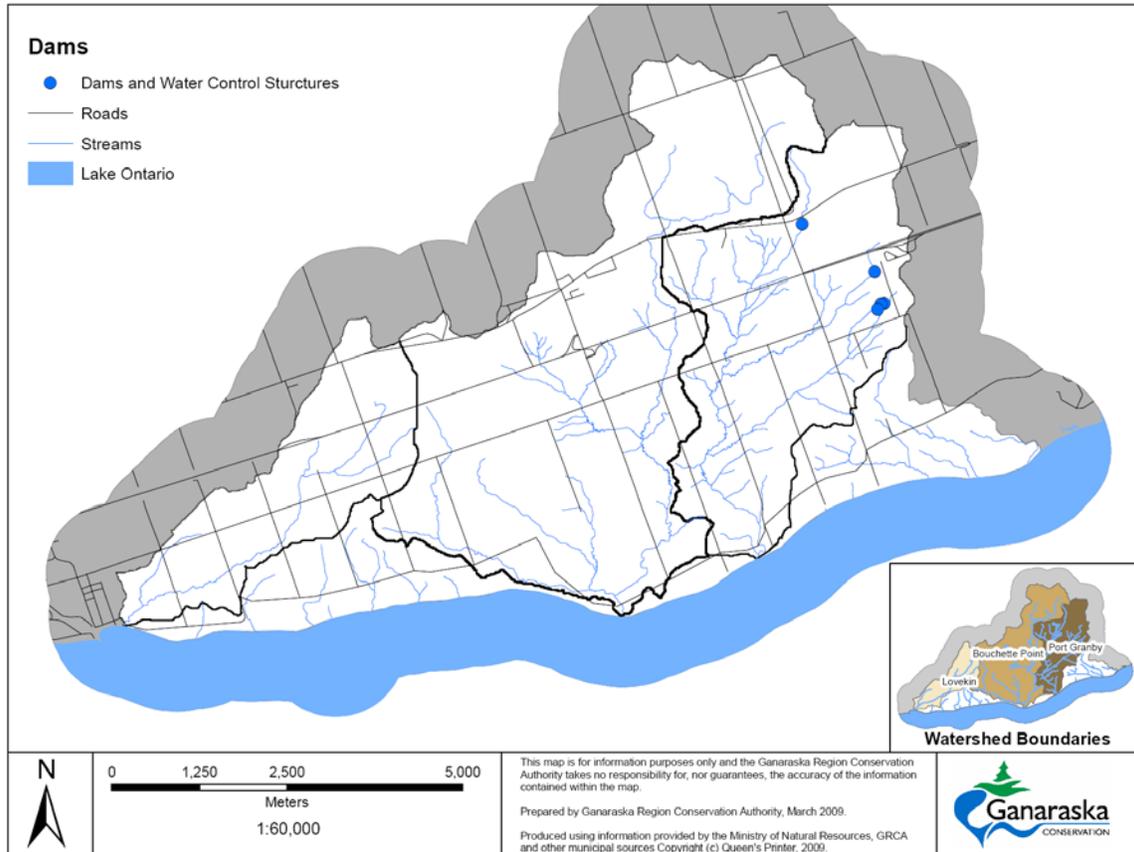


Figure 3.22: Dams and water control structures²

3.4.4 Ontario Low Water Response

The Ontario Low Water Response (formerly Ontario Water Response) program was developed in 1999/2000 to prepare and coordinate a provincial response plan for the event of a drought. The program recognizes that water management must be approached at both the provincial and local levels. The provincial role is to provide overall direction through policies and guidelines, central information storage and analysis, and emergency support (Ganaraska Region Conservation Authority 2007b). At the local level, monitoring of water levels, information collection and program delivery can be accomplished.

As part of this program, and in response to low water conditions, a Ganaraska Region Water Response Team has been established to assist with implementing the response. Members include local municipalities, the Ontario Ministry of Natural Resources, the Ontario Ministry of the Environment, the Ontario Ministry of Agriculture, Food and Rural Affairs, and the Department of Fisheries and Oceans.

² Dam inventory was only completed for Peterborough District MNR

The indicators to the Ontario Low Water Response program are the amount of precipitation and stream flow conditions. Different threshold levels for precipitation and stream flow are used to categorize the level of low water conditions (Table 3.6). Methods used to determine threshold levels are defined in Ganaraska Region Conservation Authority (2007b).

Table 3.6: Summary of threshold levels for low water response

Condition	Precipitation	Stream Flow
Level 1	3 or 18 month precipitation < 80%	or Spring: - < 100% of lowest monthly average flows Other months: - < 70% lowest monthly average flows
Level 2	1,3, or 18 month precipitation < 60% or 3 weeks of < 7.6 mm per week	or Spring: - < 70% of lowest monthly average flows Other months: - < 50% lowest monthly average flows
Level 3	1,3 or 18 month precipitation < 40%	or Spring: - < 50% of lowest monthly average flows Other months: - < 30% lowest monthly average flows

(Ganaraska Region Conservation Authority 2007b)

Once a low water condition has been identified, an appropriate response is carried out. The following, as defined in Ganaraska Region Conservation Authority (2007b), are the responses that will take place in relation to each condition.

- Level 1 Response: Communication will occur between the Water Response Team and the Ministry of Natural Resources. Each Water Response Team member is responsible for communicating water conservation messages within their sector. The message will consist of a media release, which will focus on current watershed conditions and promote a 10% voluntary water use reduction.
- Level 2 Response: When a watershed moves from Level 1 to Level 2 conditions, notification is given to members of the Water Response Team and the Ministry of Natural Resources. Each member is responsible for communicating water conservation messages within their sector with the target of a further 10% water use reduction. Municipalities may consider restrictions on non-essential use as appropriate. The provincial agencies on the Water Response Team will contact the Ontario Water Directors' Committee Low Water Committee Coordinator. The Coordinator will activate the Low Water Committee to reinforce cross-ministry program support. The

Coordinator will also notify the Provincial Emergency Response Coordinator and request regular briefings with Emergency Measures Ontario.

- **Level 3 Response:** When a watershed moves from Level 2 to Level 3 conditions, notification is given to members of the Water Response Team and the Ministry of Natural Resources. The Ontario Water Directors' Committee Low Water Committee is responsible for declaring a Level 3 condition. At the Level 3 condition water restrictions may be necessary and will be implemented through the appropriate government agency.

Since the Ontario Low Water Response program was initiated in 2000, the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds has experienced a Level 1 low water condition in 2005 and 2007. Therefore, a voluntary reduction in water use by 10% was encouraged.

3.5 SURFACE WATER ANALYSIS

Analyzing surface water can be done from a flow and a use perspective. Understanding the quantity and flow characteristics allows for protection of surface water and people and property. The following sections discuss hydrology, hydraulics, floodplains and water budgeting of the surface waters of the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds.

3.5.1 Surface Water Hydrology

Hydrology determines the amount of flow generated by a particular storm. The storm examined is defined in terms of the worst event that would statistically happen in a certain number of years. Computer models are used to determine flows and do so by examining rainfall, land area and cover, infiltration, and evaporation to determine the runoff associated with a rainfall.

3.5.2 Hydraulics Analysis

Hydraulics models take runoff results from the hydrology models and convey them down the river system estimating the extent of the area flooded by (or needed to carry) the flow. Simply put, hydrology calculates how much of the water will become runoff, and hydraulics calculates how high the river will rise. Within the three watersheds many settlement areas were built around water courses that provided power and transportation. Analysis is required to scientifically define floodplains for both the protection of existing land uses and the prevention of introducing new uses into hazardous areas.

Flood Flows

As stated in the *Technical Guide - River and Stream Systems: Flooding Hazard Limit* (Ontario Ministry of Natural Resources 2002), "The group of flood standards referred to in the *Natural Hazard Policy* is the basis by which floodplains are

delineated. It is designed to accomplish the main objectives of floodplain management: to prevent loss of life and to minimize property damage and social disruption.” There are three types of flood events used in defining the flood standard in Ontario: synthetic storms developed from the two large historical events (Hurricane Hazel and the Timmins storm), observed and documented historical events (if larger than the 100-year event), and statistically derived 100-year events. The magnitude of the flood which defines the floodplain limits in a particular area of the Province is largely dependent upon the susceptibility of that area to tropical or thunderstorms, rainfall, snowfall or a combination of these meteorological events (Ontario Ministry of Natural Resources 2002).

The three watersheds lie within Zone 1, as defined by in technical guidelines, and as such the Regulatory Flood is defined by the greater of:

- The flood level corresponding to the peak flow generated by the Regional Storm (Hurricane Hazel)
- An observed and well-documented flood level
- The 100-year flood level

All watersheds in the Ganaraska Region Conservation Authority have their Regulatory Flood defined using a Hurricane Hazel-based event.

Floodplain Analysis

As a result of the rural nature of the study area, only Lovekin Creek has been delineated for the purpose of floodplain and fill line mapping (M.M. Dillon Limited 1977). The purpose of the floodplain study was to determine the land inundated by the Regional Storm. Table 3.7 and Figure 3.23 summarize the flows expected under the Regional Storm - Hurricane Hazel.

Table 3.7: Summary of Flood Flows

Area Number	Total upstream Area (km²)	Total Rainfall (mm)*	Peak Flow (cms)*
4	0.39	211	5
4 and 5	5.13	211	51
1	0.41	211	6
1 and 2	1.09	211	11
1, 2, 3 and 5	6.22	211	61
1 through 5	6.45	211	64

*based on Regional Storm
Original report in imperial units

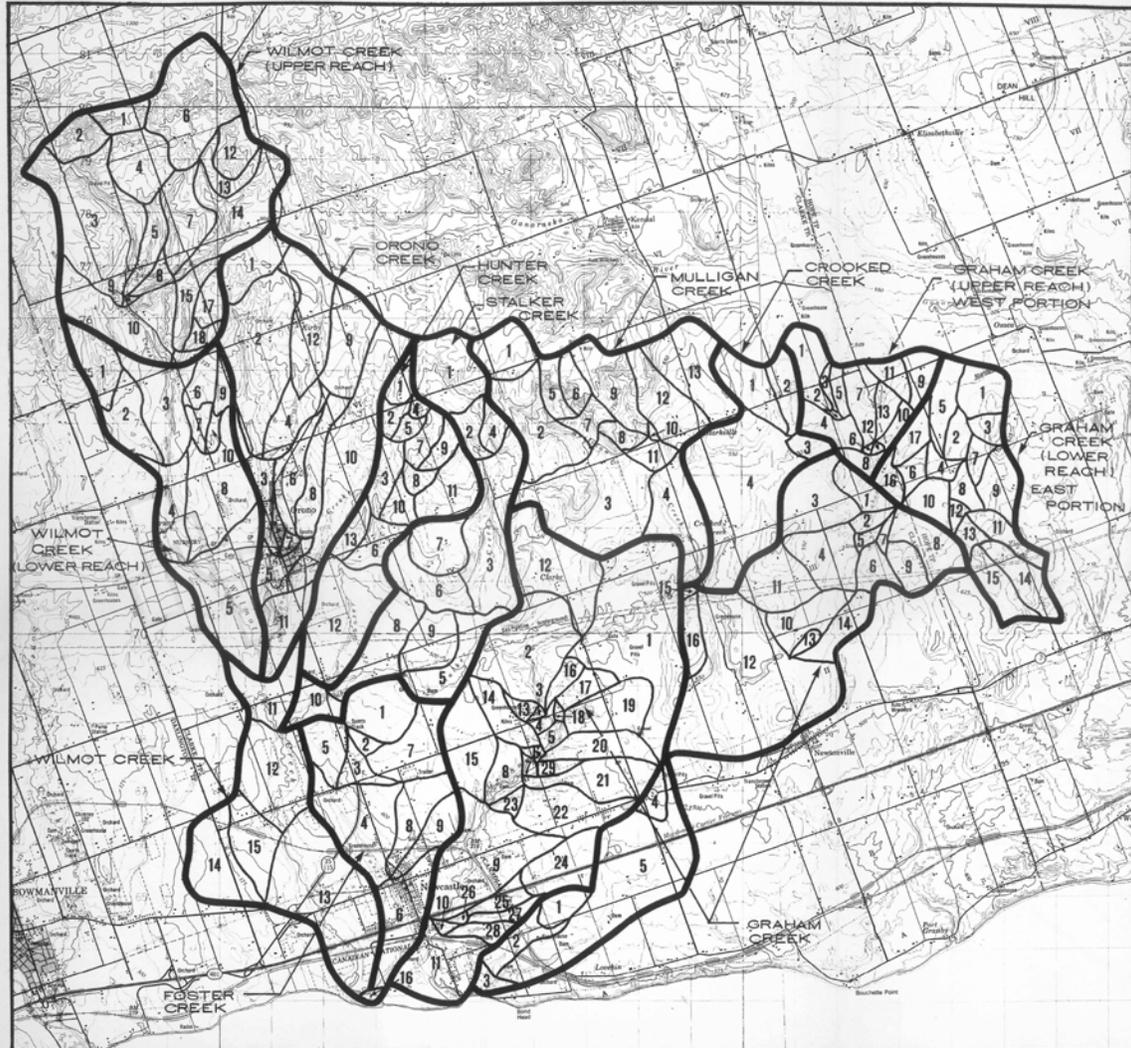


Figure 3.23: Floodplain study area

3.5.3 Natural Hazards

Natural Hazard Limits are boundary lines that delineate areas where there is a concern for public health and safety associated with natural hazards. Generally these hazards are a result of flooding, erosion or instable organic soils. The Province of Ontario has developed criteria for defining these Natural Hazard Limits, which are implemented both through the *Provincial Policy Statement* and *Ontario Regulation 97/04*. Criteria are also outlined in the *Development, Interference with Wetlands, and Alterations to Shorelines and Watercourses Regulations*, implemented by Conservation Authorities throughout the province. These regulations are empowered by Section 28 of the *Conservation Authorities Act*, and the Ganaraska Region Conservation Authority administers *Ontario Regulation 168/06*, in the three watersheds.

The Ganaraska Region Conservation Authority has developed hazard limits for the riverine, coastal and wetland systems (organic soils), for the purpose of

provincial policy and regulations implementation. These limits have been used to create a single mapping product for all hazard areas in the watershed (Figure 3.24). Lake Ontario hazards, which are also delineated, are not being addressed in this background report.

General Objectives of Hazard Lines

The general objective of hazard mapping is to develop background information that will satisfy data requirements of the municipal zoning by-laws and the natural hazards component of the *Provincial Policy Statement*. The Ganaraska Region Conservation Authority has established objectives which form the basis of the decision-making process associated with regulation implementation. These objectives include an Authority program designed to “*prevent loss of life and/or property damage resulting from flooding and/or erosion on lands subject to the Regulation by minimizing hazardous and unnecessary development of lands within Regulatory floodplains*” (Ganaraska Region Conservation Authority 2005b). Other objectives include the following.

- To promote the conservation and wise use of watercourses and their associated valleylands
- To require mitigating measures to be undertaken for work within regulated areas, which singly or cumulatively may cause an increase in flooding or erosion, or a decrease in the environmental quality of the stream and its associated valleylands
- To reduce the necessity for public and private expenditures for emergency operations, evacuation and restoration of properties subject to flooding
- To regulate uses of floodplains and any development within them that in future years may require emergency operations and expensive protective measures
- To regulate development on or adjacent to potentially dangerous slopes
- To reduce soil erosion from valley slopes
- To regulate the draining or filling of wetlands, which may reduce natural water storage capacity and protect provincially and/or locally significant wetlands
- To minimize water pollution associated with filling and construction activities; the Ganaraska Region Conservation Authority will liaise with other agencies regarding pollution matters and promote wise use of water resources to help improve water quality throughout the watershed.
- To make information available regarding erosion prone areas to interested parties.

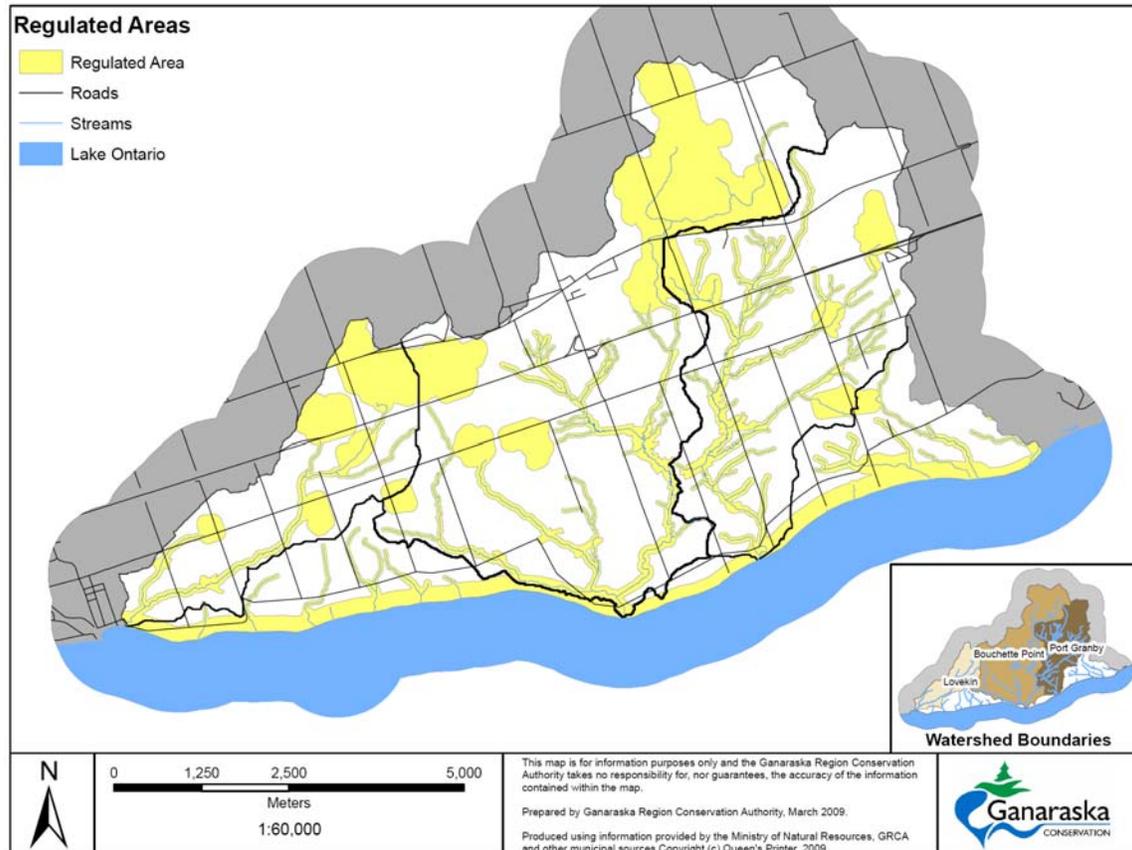


Figure 3.24: Regulated areas

Provincial Policy Statement

The *Provincial Policy Statement, 2005* (PPS) defines development as “new lot creation, a change in land use or construction which requires approval under the *Planning Act*” (Ontario Ministry of Municipal Affairs and Housing 2005). The PPS protects public health and safety through the land use planning process by directing development away from these hazardous areas, and only permitting development where hazards can be safely addressed. Section 3.0 of the PPS contains the natural hazard policies that form the basis for comments the Ganaraska Region Conservation Authority provides to municipalities on applications circulated in the three watersheds.

Hazard Types and Limits

Riverine Hazards

Riverine hazards result from the proximity of a structure to a river, creek, or stream. Natural hazards relating to riverine systems may include flooding, stream erosion, slope instability, and the shifting tendencies of meandering riverine systems. Riverine hazard limits address these hazards. To account for the variation present in the shape of riverine systems, two basic categories have been developed to facilitate the determination of the erosion-related components

of the Natural Hazard Limit: confined and unconfined riverine systems. The following sections outline the methods that have been developed to set the boundaries within which development is susceptible to hazards.

Flooding Hazard Limit

The Flooding Hazard Limit, or Regulatory Floodline, is generally based on the greater of the Hurricane Hazel storm event (the Regional Storm) or the 100-year return period storm. Floodlines for the Regional Storm are calculated using precipitation data from Hurricane Hazel, which occurred in 1954, while the 100-year floodlines are based on a storm that statistically occurs once every one hundred years.

The Regulatory Floodline is determined through a computer simulation of the specified storm centred over the watershed in question. This model takes into account watershed features including soils (type and degree of saturation), vegetation, grades, and existing land uses, and defines the water surface elevations that will be produced by the storm. Figures 3.25 and 3.26 display the application of this model in delineating the Regulatory Floodline.

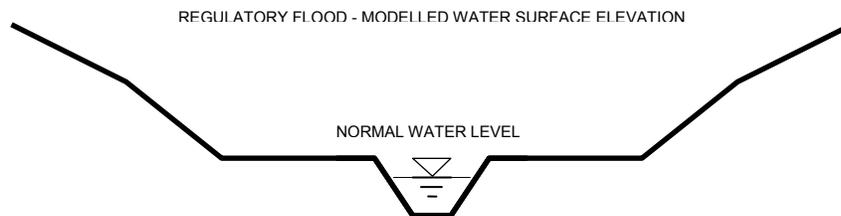


Figure 3.25: Watercourse cross-section with a Regulatory Floodline

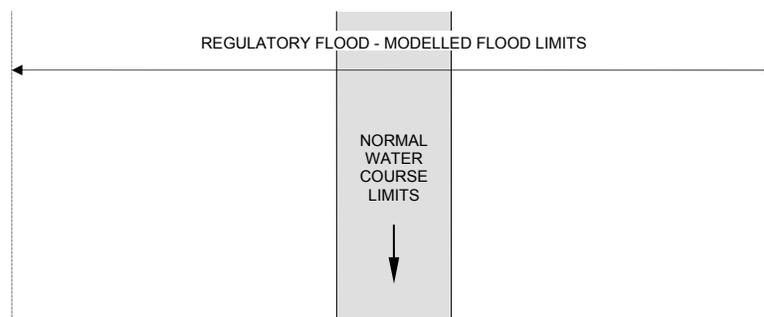


Figure 3.26: Plan view of a watercourse with a Regulatory Floodline

Erosion Hazard Limit - Confined Systems

The Erosion Hazard Limit for a confined system consists of the Toe Erosion Allowance, the Stable Slope Allowance, and the Erosion Access Allowance. A confined system, for this purpose, is defined as a watercourse within a clearly visible valley that is impacting on the valley walls, and is shown in Figure 3.27.

Stream Erosion

Stream bank erosion is an important cause of valley slope instability, and is ultimately responsible for the presence of valleys. Stream erosion directly at the toe of a valley slope can steepen and undercut the slope, leading to the eventual failure of the bank. The Toe Erosion Allowance has been implemented to buffer development from the hazardous effects of toe erosion, and also to buffer the natural river processes from the influences of development. This allowance is based on a minimum distance of 15 metres between the edge of a river system and the toe of its confining valley wall. Figures 3.27 and 3.28 show the application of the Toe Erosion Allowance. On a reach to reach basis, a determination is made as to whether the stream impacts on the valley wall at any location. If so, the Toe Erosion Allowance is expanded to include all lands between the top of bank and the toe of slope (valley floor).

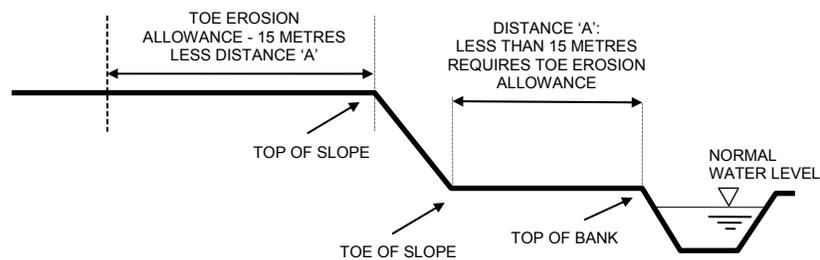


Figure 3.27: Watercourse cross-section with Toe Erosion Allowance

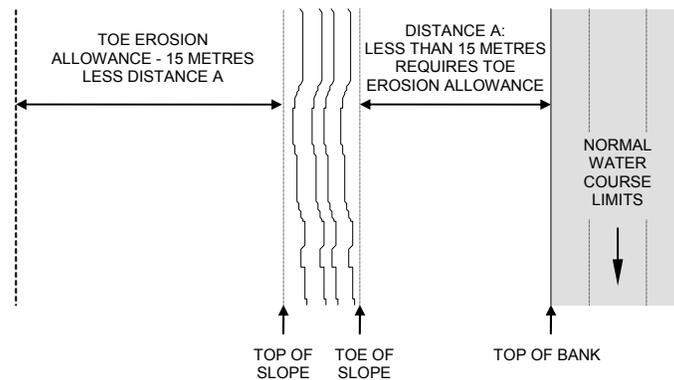


Figure 3.28: Plan view of watercourse with Toe Erosion Allowance

Slope Stability Allowance

Slopes are also naturally subject to movement and failure. The Stable Slope Allowance has been implemented to buffer development from the hazards of slope instability, and also to prevent the influence of development on the rate of slope movement. This allowance is based on an assumed stable slope gradient of 3 horizontal units to 1 vertical unit (3:1). For slopes at steeper gradients, the allowance is equal to the distance between the actual valley top of slope and the

point at which a slope at a 3:1 gradient, rising from the same toe position, would intersect the ground surface. Figure 3.29 shows the application of the Stable Slope Allowance.

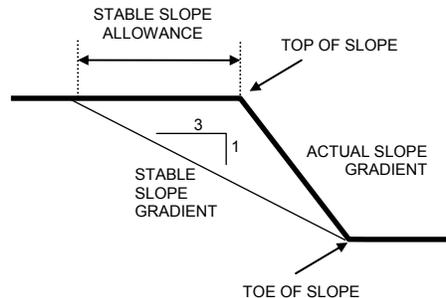


Figure 3.29: Stable Slope Allowance

Access Allowance

In addition to the above-mentioned Toe Erosion and Stable Slope Allowances, a minimum 5-metre Erosion Access Allowance is also applied to maintain sufficient access for emergencies, maintenance and construction activities. This allowance is analogous to a factor of safety, providing protection against unforeseen conditions that may adversely affect the natural processes of an erosion-prone area. Figure 3.30 shows a typical application of the Erosion Access Allowance in conjunction with the Toe Erosion and Stable Slope Allowances. The Erosion Hazard Limit for a confined system is comprised of these three allowances (Erosion Access, Toe Erosion and Stable Slope).

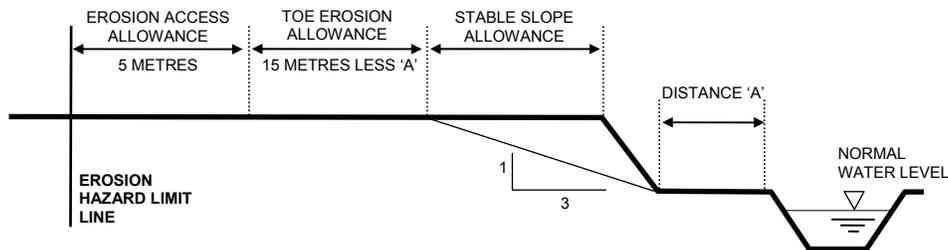


Figure 3.30: Erosion Hazard Limit (for a confined system)

Erosion Hazard Limit - Unconfined Systems

The Erosion Hazard Limit for unconfined systems consists of the Meander Belt Allowance and the Erosion Access Allowance. Unconfined systems occur where a watercourse is not contained within a clearly visible valley section. If the stream sits in a large valley section but does not impact on the valley wall, the stream is considered unconfined.

Meander Belt

In unconfined systems, the watercourse is not contained within a visible valley, rather the flow of water is free to shift across the land. As a result, the watercourse of an unconfined system does not impact on the valley walls. Meandering tendencies of the watercourse, areas of confluence and areas of geographical change must be thoroughly examined to accurately designate representative reaches along the watercourse. For this purpose, a reach is defined as areas of similar topography along the watercourse, and regions between confluences.

The Meander Belt Allowance provides a limit to development in the areas where the river system is likely to shift. This allowance is based on 20 times the bankfull channel width, where the bankfull channel width is measured at the widest riffle section of the reach. A riffle is a section of shallow rapids where the water surface is broken by small waves. Measurements of the bankfull width have been determined for each reach, or groups of reaches, by observing existing aerial photographs, maps and field data. Where on-line ponds are located in unconfined systems, the meander belt width is increased by the width of the open water in the pond.

Erosion Hazard

The Erosion Hazard Limit for an unconfined system is comprised of the Meander Belt Allowance and the 6-metre Erosion Access Allowance. Figure 3.31 shows a typical application of the Meander Belt Allowance and the Erosion Access Allowance to define the Erosion Hazard Limit.

Access Allowance

As with confined systems, the 5-metre Erosion Access Allowance is also applied in unconfined systems to maintain sufficient access for emergencies, maintenance and construction activities. This allowance is shown in conjunction with the Meander Belt Allowance in Figure 3.31.

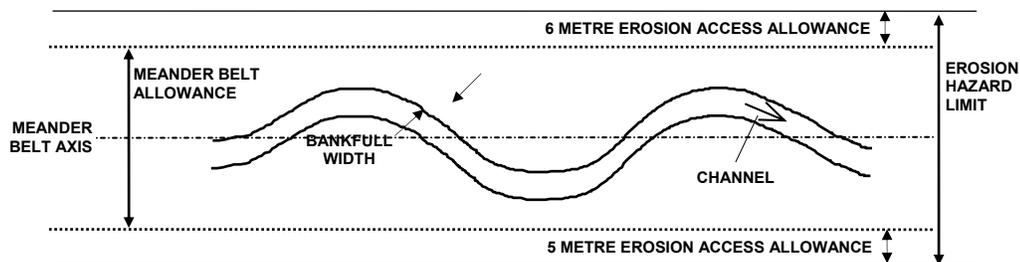


Figure 3.31: Erosion Hazard Limit (for an unconfined system)

Natural Hazard Limit - Riverine Hazards

The Toe Erosion Allowance, Stable Slope Allowance, Erosion Access Allowance and Meander Belt Allowance (where applicable) are applied in combination to

every riverine system. The result of these allowances is the final Erosion Hazard Limit. The Flooding and Erosion Hazard Limits are drawn out for each riverine system, and the furthest landward limit of these two lines is taken to be the Natural Hazard Limit.

Wetland Natural Hazards

Wetlands are defined in the *Provincial Policy Statement* as follows. Section 28 under the *Conservation Authorities Act* acknowledges the same wetland definition as the *Provincial Policy Statement*.

Lands that are seasonally or permanently flooded by shallow water, as well as lands where the watertable is close to or at the surface. In either case the presence of abundant water has caused the formation of hydric soils and has favoured the dominance of either hydrophytic plants or water tolerant plants. The four major types of wetlands are swamps, marshes, bogs, and fens (Ontario Ministry of Municipal Affairs and Housing 2005).

Wetlands are included as a natural hazard because they exhibit two hazards: flooding and instability due to organic soils. To satisfy requirements of both the Natural Hazard Policy and the Generic Regulation provincially significant wetlands and unevaluated wetlands (identified through the Ecological Land Classification) are defined as part of the wetland natural hazards.

In order to map wetlands for natural hazard purposes, provincially significant wetlands, wetland complexes, and locally significant wetlands were mapped. Once the wetland boundary was determined, the wetland was classified as either provincially significant or locally significant. For provincially significant wetlands a buffer of 120 m was added to the wetland to define the natural hazard limit. Locally or regionally significant wetlands were mapped and a 30 m buffer was added to define the Natural Hazard Limit.

3.5.4 Water Budget and Stress Assessment

The following section was modified from the Tier 1 water budget process, prepared for the Drinking Water Source Protection program. Please refer to Ganaraska Region Conservation Authority (2008) for further detail.

A water budget is a scientific, computer-based tool used to define a watershed's hydrologic system. Results of a water budget provide understanding of how water flows onto and on the surface, and through and below the ground. Water budgets will expand beyond the quantification of components in the water balance equation (precipitation, evapotranspiration, groundwater and surface water flow) to include water use. Water budget analyses are undertaken in a watershed to quantify water entering and leaving the watershed, and to characterize the contribution of each component to the overall hydrologic system.

A stress analysis identifies the functional relationships among water budget components and produces a foundation that can be used to evaluate future watershed stresses. Stresses (e.g., development activities, water taking or climate change) in a watershed can modify the relative contribution and characteristics of the components of the hydrologic system, and alter the overall water budget. This may threaten the health of ecosystems that have become established under the current hydrologic cycle. Stresses include increased peak flows or significant reduction in groundwater discharge that sustains a river baseflow. A water budget analysis can be carried out to predict the effect of newly induced stresses on components of the hydrologic cycle such as peak flows, and groundwater recharge and discharge.

Water Budget Equations and Components

A water budget is an estimation or account of the various hydrologic cycle processes for a given study area, and it consists of inputs, outputs and changes in storage. The inputs are precipitation, groundwater or surface water inflows, and anthropogenic inputs such as waste effluent. Outputs are evapotranspiration, water supply removals or abstractions, surface or groundwater outflows, as well as any changes in storage in the area of interest. The inputs must equal the outputs if the system is to remain in equilibrium. The individual inputs and outputs of a water budget can be expressed as follows.

Equation 1

$$\mathbf{P + SW_{in} + GW_{in} + ANTH_{in} = ET + SW_{out} + GW_{out} + ANTH_{out} + \Delta S}$$

Where:

P = precipitation

SW_{in} = surface water flow in

GW_{in} = groundwater flow in

ANTH_{in} = anthropogenic or human inputs such as waste discharges

ET = evaporation and transpiration

SW_{out} = surface water flow out

GW_{out} = groundwater flow out

ANTH_{out} = anthropogenic or human removals or abstractions

ΔS = change in storage (surface water, soil moisture, groundwater)

(Ontario Ministry of the Environment 2007)

For this study, the recent version of the model CANWET 3 was used to run the water budget. The current version gives an opportunity to use monthly curve numbers, evapotranspiration coefficient, recession coefficient and seepage coefficient. The seepage coefficient facilitates the discharge to and recharge from neighbouring watersheds. In addition Geographic Information System (GIS) layers were used in the model (Table 3.8). Since the three watersheds are ungauged systems the calibrated model parameters of neighbouring gauged Wilmot Creek was used for estimating necessary water budget components.

Table 3.8: GIS layer sources used for surface water budget

Data Layer and Summary of Preparation
Physiographic Regions (MNR and YPDT-CAMC 2006 – GIS Layer) recession constant is 0.06 which was calculated from recession segments of hydrographs at gauge stations.
Soils (OMAFRA 2004 – GIS Layer) defined textures guided by Soils Layer Development for CANWET (Greenland, 2006). Assigned values of unsaturated water capacity according to CANWET User's Guide.
Basins delineated by ArchHydro Version 1.2 on the basis of DEM, V 2 from MNR.
County (MNR 2002)
Streams (MNR 2002)
Weather (Environment Canada Website) selection of two stations on the basis of locations, correlation, data quality and fitness with corresponding stream flow data.
Elevation (MNR, Version 2)
Land use (GRCA ELC 2006) re-classified according to CANWET User's Guide (Version 1.0). Revised to future land use layer based on <i>Municipality of Clarington Official Plan (2007)</i> ; <i>Municipality of Port Hope Official Plan (2008)</i> .
Tile Drainage analyzed and determined that recorded tiles are not significant in modeled watersheds.
Point source discharge to Lake Ontario, not necessary to be modeled.
Permit to Take Water (MOE 2007) consider consumptive factor (Aqua Resource 2004). Removal of permits from Lake Ontario, temporary extractions and those that expired before 2003.

Stress Assessment Methodology

A stress assessment looks at the amount of water in a watershed in relation to water uses. Through drinking water source protection, the province has developed stress rankings to determine if a watershed is stressed based on water supplies and water uses. The water supply estimation constitutes two components, surface water supply, which is the water available as stream flow, and groundwater supply, which is the water available in the aquifers.

Surface Water Supply and Study Approach

Five methods have been suggested through drinking water source protection (Ontario Ministry of the Environment 2007) to calculate monthly surface water supply.

1. Calibrated continuous surface model results: Q_{p50} (monthly median)
2. Stream flow monitoring from Hydroclimatological Data Retrieval Program (HYDAT): Q_{p50} (monthly median)
3. Stream flow monitoring (manual): monthly/bi-monthly measurements of baseflow
4. Prorated stream flow monitoring: prorated stream flow dataset from nearby gauge stations with similar physiographic and land use setting Ontario Flow Assessment Technique (OFAT) $30Q_2$ estimated average annual baseflow.

This study follows approaches 1 and 2 to estimate the surface water supply. Since the three watersheds are not gauged, the CANWET model was setup using the calibrated parameters of the Wilmot Creek watershed which has similar physiographic and land use features. The model simulated stream flow was then used to estimate Q_{p50} to determine the monthly surface water supply. Three scenarios were then run to estimate surface water supplies. These include the current (existing) scenario, the future scenario and a future scenario under climate change.

Current Scenario

The current scenario implies estimating surface water supply for the existing climate and the current land use scenario. The CANWET model was run using long-term climate data from 1976 to 1995 and the existing land use features. The simulated stream flow data for the 20-year period was then used to estimate Q_{p50} to determine the monthly surface water supply.

Future Scenario

The future scenario implies estimating surface water supply for the existing climate and the future land use scenario. The CANWET model was run using climate data from 1976 to 1995 and the land use scenario expected after 25 years. The 25-year future scenario assumes full build-out of the Municipality of Clarington official plan designated lands (Figure 3.32). The Q_{p50} was then estimated from the 20-year simulated stream flow to predict the future monthly water supply.

Future Scenario with Climate Change

Climate is expected to change in the future with the increasing levels of greenhouse gases in the atmosphere. A number of groups around the world have been involved in predicting how much the change might be. To depict the climate change scenario, Global Climate Models (GCM) have been developed at different geographical locations. The Canadian Centre for Climate Modeling and Analysis under the umbrella of Environment Canada has also come up with a series of Canadian Global Climate Models (CGCM) for climate prediction, study of climate change and variability, and to better understand the various processes that govern our climate system.

The CGCM divides the globe into $3.75^\circ \times 3.75^\circ$ grids and models climate data for each of these grids at a varied time series. For this study, CGCM2 IPCC SRES "A2" GHG was used and future climate data was generated for the years 2021 to 2040. The CANWET model was then run using future climate data and future land use features to simulate stream flow under this changed climate scenario.

The future climate generated by CGCM seemed to overpredict precipitation. The average annual precipitation for 20 years was 1276 mm, about 42% more than the average annual precipitation observed between 1976 and 1995. Therefore

the CGCM model simulations need further investigation. However, for the present study the CGCM simulations were used to estimate water supply.

Further, the simplistic modeling approach used for water budget and stress assessment has been found limiting for handling groundwater flows under changed climatic conditions. This is due to some inherited limitations in the SCS-CN approach and single tank sub-surface structure of the CANWET model.

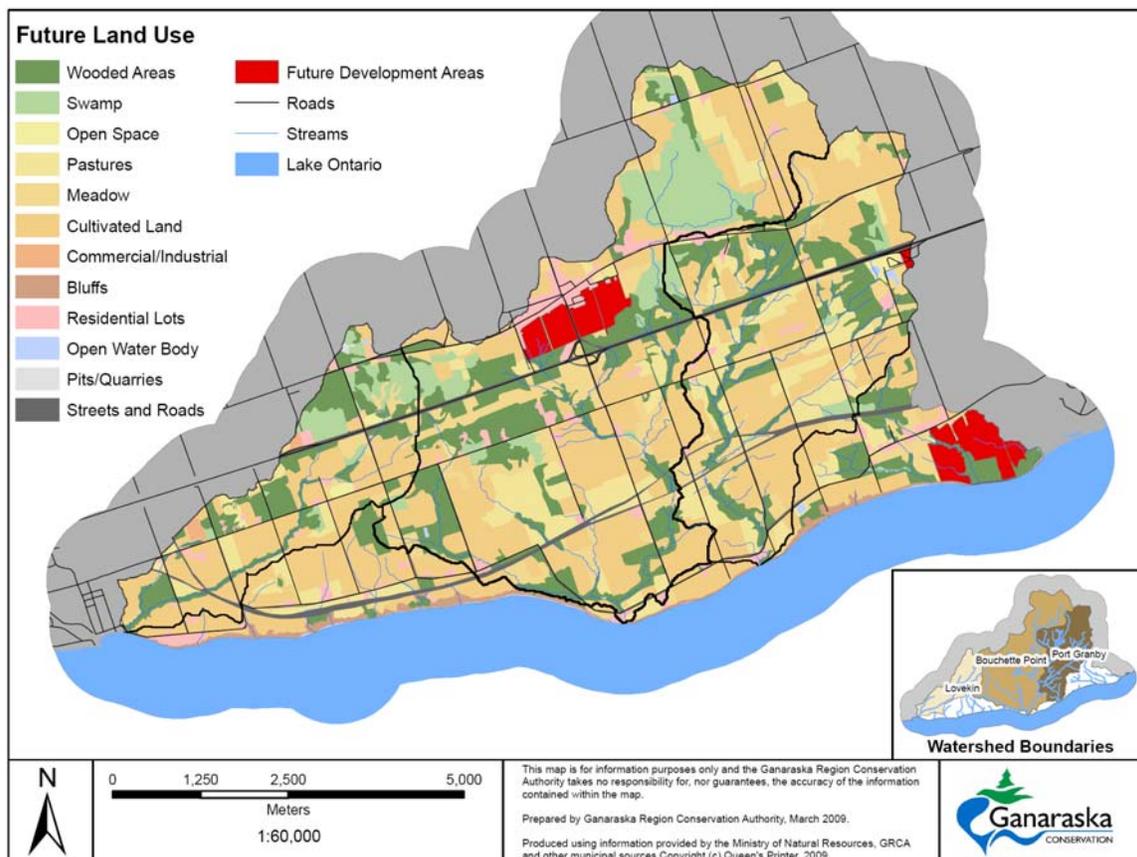


Figure 3.32: Future land use

Groundwater Supply and Study Approach

As indicated through drinking water source protection guidance documents (Ontario Ministry of the Environment 2007), in the “analysis of groundwater supplies, aquifer storage is not considered and the watershed water supply terms are therefore assumed to be constant on an average annual basis. As such, recharge estimation methods applied should determine recharge estimates as the average annual rates.”

Ontario Ministry of the Environment (2007) lists the following methods for estimating groundwater recharge.

- Baseflow separation/water balance
- Calibrated continuous surface water model or groundwater model

- Calibrated soil moisture balance
- Experience.

In this study, calibrated surface water model CANWET was used to estimate annual average groundwater recharge. The calibrated models were run for the 20-year simulation period (1976-1995) and estimated annual groundwater recharge was then averaged to predict groundwater supply.

The observed stream flow was also partitioned into baseflow and surface flow using two approaches: digital filter strip and base sliding interval. (For the gauged watersheds the observed stream flow was also partitioned into baseflow and surface flow using six approaches including digital filter, PART, base sliding, fixed base, local minimum and modified United Kingdom Institute of Hydrology. The base sliding interval technique was found more appropriate for Ganaraska Region Conservation Authority watersheds including Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds.

Current Scenario

The current scenario implies estimating groundwater recharge values using the existing climate data and current land use scenario. The CANWET model was run using long-term climate data from 1976 to 1995 and the existing land use features. The simulated annual groundwater recharge was then averaged to estimate the groundwater supply. According to the Ontario Ministry of the Environment (2007), the monthly groundwater supply is to be calculated simply by dividing the annual numbers by 12 months.

Future Scenario

The future scenario implies estimating groundwater supply using the existing climate data and the future land use scenario. The CANWET model was run using climate data from 1976 to 1995 and land use features expected after 25 years. The simulated annual groundwater recharge was then averaged to estimate the groundwater supply under future conditions.

Future Scenario with Climate Change

The groundwater supply for future land use scenario under climate change was estimated by running the CANWET model using land use features expected after 25 years and change in climate predicted for years 2021 to 2040 by the CGCM2 model. The simulated annual groundwater recharge was then averaged to estimate the annual groundwater supply under future conditions and changed climate. A monthly supply was estimated by dividing the annual estimate by 12.

Water Demand Estimation

In this water budget and water quantity stress assessment, the estimation of monthly consumptive demand for surface and groundwater is a critical element. Water demand needs to be calculated as the “consumptive” use which refers to water taken from groundwater or surface water and not returned locally in a

reasonable time period. From the calculation perspective, total consumptive demand estimation comprises the permitted water use estimation and non-permitted water use estimation, which includes non-permitted agricultural and non-permitted residential water use. The groundwater and surface water demands were calculated separately for further stress assessments.

Permitted Water Use

The primary source of information for water demand estimation is the MOE Permit to Take Water (PTTW) database. Water users that take more than 50,000 litres/day (L/d) are required to obtain a PTTW from the Ontario Ministry of the Environment, with the exception of agricultural and livestock uses. However, the PTTW database does not contain any direct information about the amount of water actually taken and no detailed information about when the water consumption occurs for each permitted use.

The new PTTW management database, containing data up to 2005, was developed by MOE to supplement the old PTTW database by accounting for multi-site permits, consumptive use and seasonal variability. Therefore, the new PTTW management database was selected as a basis for permitted water demand estimation. For the purpose of water demand estimation, the database was carefully screened and updated by Ganaraska Region Conservation Authority staff through the following steps.

- Screened the validity of all permits that expired before December 31 2002. Expired permits were not considered in the water demand calculation. In addition, permitted takings from Lake Ontario and temporary takings, were not considered in water demand calculations.
- Updated database with new permits issued from 2005 to 2007
- Replaced maximum water taking rate by actual pumping rates where the actual records were available
- Reviewed all multiple sources and multiple factors in permits
- Applied default monthly adjustments on PTTW and adjusted by reviewing individual permits
- Applied consumptive factors: the default consumptive factors in Ontario Ministry of the Environment (2007) are applied, except those uses that removed water from original sources (study unit) and did not return the water to same unit within a reasonable time period (e.g., water bottling).

The locations of PTTW sites considered in the water budget are shown in Figure 3.33 and detailed information regarding these takings is listed in Table 3.9.

Table 3.9: Permits to Take Water

Watershed	Source	General Purpose	Specific Purpose	Consumptive Factor	Max Per Day (L/day)	Consumptive Annual Taking (m ³)
Bouchette Point Creek	Ground	Agricultural	Field and Pasture Crops	0.8	2,640,000	60,264
	Ground	Agricultural	Field and Pasture Crops	0.8	1,318,340	30,094
Lovekin Creek	Ground	Commercial	Highway Service Center	0.25	318,220	29,591
Port Granby Creek	Ground	Water Supply	Municipal	0.2	318,220	23,228

Demand proportions is 1

Non-permitted water use generally includes groundwater takings from private water supply wells in municipally unserved areas, and surface water takings from streams and ponds for agricultural use. This was determined upon review of land use and local water use patterns.

Non-served Residential Water Demand

As prescribed in Ontario Ministry of the Environment (2007), water demand for non-served residential areas is calculated by combining population density with typical per-capita water use rates. It is recommended to use Statistics Canada Census data at the dissemination area (DA) level to estimate total population and then estimate non-served population by removing municipally serviced populations. When the non-served population distribution is generated, non-served residential demand can be calculated using the typical water usage rate of 335 litres per day per person (L/d/person).

Upon review of local water use, it has been determined that non-served residents take their water from the groundwater system. The consumptive factor was designated to be 0.2 because most of the removed water will be returned to the groundwater system through septic systems.

Total population estimation

2006 Statistics Canada Census data at dissemination area (DA) level in the format of GIS database was obtained. The total population for the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds is calculated by overlaying population DA polygons onto watershed polygons, breaking down by area and aggregating numbers. The population in the Lovekin Creek watershed is 615 people, Bouchette Point Creek watershed is 473 people and Port Granby Creek watersheds is 225 people (Table 3.10).

Non-served water demand

Non-served water demand is calculated by combining non-served population and the recommended water usage rate 335 litres per day per person. The results are presented in Table 3.10.

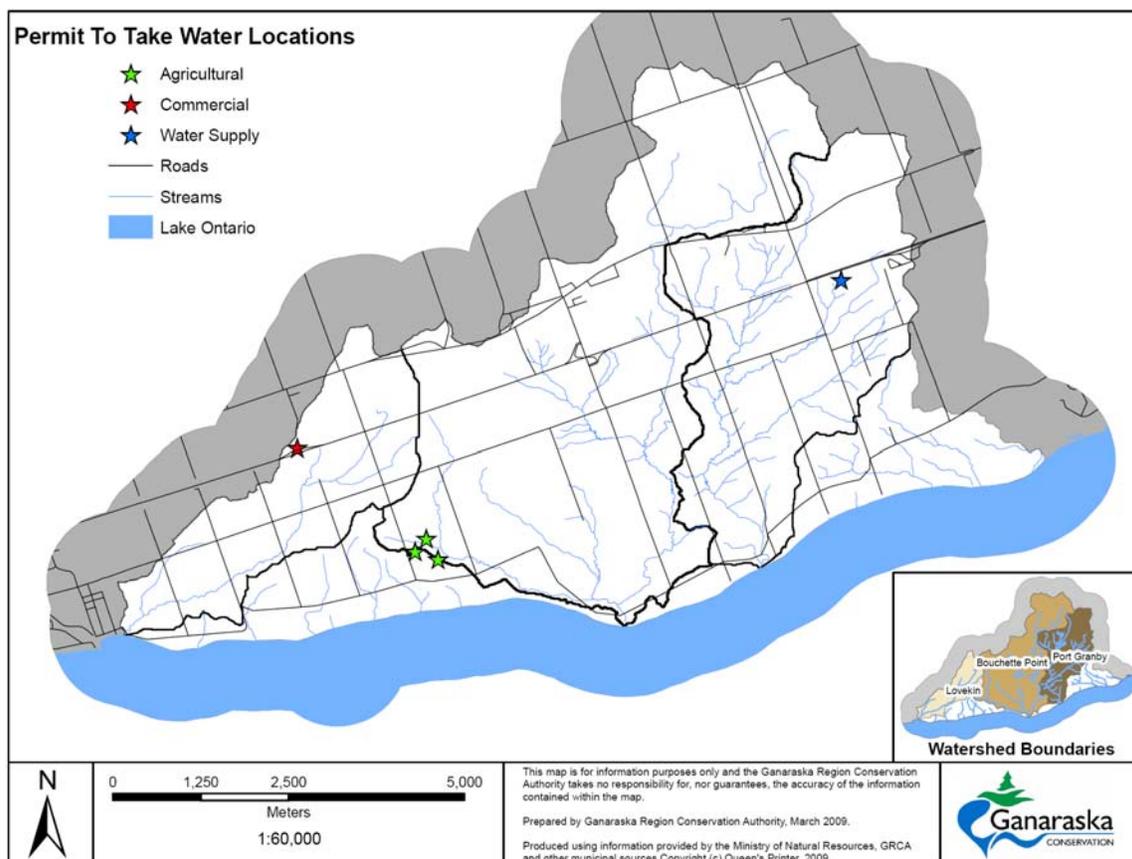


Figure 3.33: Permit to Take Water

Table 3.10: Existing serviced and non-serviced residential water use

Watershed	Total Population	Serviced Population	Non-serviced Population	Percent Serviced	Non-serviced Residential Water Demand
Lovekin Creek	615	0	615	0	75,243 m ³ 10.47 mm
Bouchette Point Creek	473	433	40	92	4,873 m ³ 0.21 mm
Port Granby Creek	225	0	225	0	27,509 m ³ 2.06 mm

The population for Lovekin Creek and Port Granby Creek is overestimated due to scaling issues of census division areas.

Non-permitted Agricultural Water Demand

Ontario Ministry of the Environment (2007) recommends the use of the De Loë (2002) method that estimates agricultural water use based on the Statistics Canada 2001 agricultural census data at Census Consolidated Subdivision (CCS) level. Considering the fact that land use in the three watersheds has not experienced measurable changes in the past five years, the results from the De Loë method (2002) were used directly. This was done by overlaying the De Loë layer on the three watersheds polygons and aggregating the data. Non-permitted agricultural water use was estimated by subtracting permitted takings of water for

agricultural purposes. The following three assumptions were applied during the calculation.

Non-permitted agricultural uses are assumed to be exclusively surface water takings. The applied consumptive factor is 0.78. The seasonal water use occurs in summer (July and August). The non-permitted agricultural demand is reported in Table 3.11.

Table 3.11: Surface water non-permitted agricultural water use (m³)

Watershed	January to June	July	August	September to December	Annual
Lovekin Creek	10 each month	5,208	5,208	10 each month	10,516
Bouchette Point Creek	814 each month	814	814	814 each month	9,765
Port Granby Creek	472 each month	10,185	10,185	472 each month	25,089

Future Scenario

For 25-year future scenarios, water demand was estimated by taking into account the increase in population serviced by the watersheds. The water demand for the municipal areas serviced by Lake Ontario is assumed to be a constant. The amount of 13.2% and 25.2% was estimated to represent the increases over the 25-year time frame in the rural areas of the Municipality of Clarington and the Municipality of Port Hope respectively.

Water Reserve Estimation

The concept of “water reserve” is designed to set aside water for purposes other than uses that are currently permitted (Ontario Ministry of the Environment 2007), such as natural ecosystem uses (e.g., in-stream needs, springs and wetlands) and other human uses (e.g., waste assimilation, power generation, navigation and recreation). The reserve quantity is subtracted from the total water source supply prior to evaluating the percent water demand.

Upon review of the current situation and future developments in the three watersheds, there are no significant water reserve requirements for waste assimilation or navigation. Recreational uses are primarily limited to Lake Ontario. Other activities such as canoeing, kayaking and navigation on local streams were assumed to be negligible. Therefore, the main function of reserved water is to maintain the health of the natural ecosystem.

Surface Water Reserve

The Ontario Ministry of the Environment (2007) recommended two methods to estimate water reserve for surface water stress assessments.

- Calculation of lower decile flow (Q_{p90}) on a monthly basis
- Calculation of reserve values using the Tessman method.

Through the Tier 1 Water Budget study and for ungauged watersheds, Tessman method gives more reasonable estimation of surface water reserve because:

- Q_{p90} is determined by one ranked position at lower decile after ranking stream flow from the largest value to the smallest value. It was less reliable when this method was used in simulated stream flows instead of observed stream flows.
- The Tessman method estimates water reserve based on mean values, and the reserve values are not easy to be affected by simulation errors.

Therefore, the Tessman method is used on the simulated stream flows from the CANWET model for surface water reserve estimation.

Under the future scenario with climate change prediction, the Tessman method is not appropriate for calculations of watershed reserve values, because during the dry months, the monthly water reserve is larger than the water supply. Due to this situation, Q_{p90} was used. More investigation is required to determine the effect of climate change on water reserve.

Groundwater Reserve

The Ontario Ministry of the Environment (2007) recommends that a simplified estimation method be applied for analysis whereby the reserve is estimated as 10% of the existing groundwater discharge. However, there is no theoretical basis for this value and it may be low considering that in Ganaraska Region Conservation Authority watersheds baseflow represents 40 to 60% of stream flow. Therefore the required reserve for the three watersheds was estimated and simplified as 10% of the average annual and monthly groundwater supply, however this assumption is questionable.

Stress Assessment Calculation

The objective of the stress assessment is to screen the three watersheds and indicate whether there is a significant or medium stress level. The Ontario Ministry of the Environment (2007) indicates that the stress assessment is evaluated by percent water demand, which is the ratio of the consumptive water demand to water supplies, minus water reserves. Using a comparison between thresholds and estimated percent water demand, the three watersheds are then assigned a stress level.

In the Drinking Water Source Protection program, a low level of stress requires no further water budgeting and assessment work, but monitoring, database maintenance and assessment updating are encouraged. A moderate to significant level of stress, plus the presence of municipal drinking water systems, requires a Tier 2 assessment. A moderate to significant level of stress, without the presence of municipal drinking water systems is highlighted for more consideration under other regulatory programs (e.g., PTTW, *Fisheries Act*, etc.).

Stress assessments evaluate surface water and groundwater independently and for three different scenarios: a current scenario, future scenario and climate

change scenario. The resulting assigned stress level is the maximum of the three scenarios.

Surface Water Stress Assessment Current Scenario

Water supply and water reserve were calculated based on monthly simulated stream flows and monitored flows. Water demands were distributed to each month, considering the seasonal usage to investigate typical peak demand situations in the summer. Then the percent water demands were calculated as a relative indicator for each month by using the following equation (Eq.1). The largest monthly percent water demand was used to classify the stress level by comparing calculated values with surface water stress thresholds (Table 3.12).

$$\% \text{ Water Demand (Surface Water)} = \frac{Q_{\text{DEMAND (SW)}}}{Q_{\text{SUPPLY (SW)}} - Q_{\text{RESERVE (SW)}}} \times 100 \quad [\text{Eq.1}]$$

Table 3.12: Surface water stress thresholds

Surface Water Quantity Stress Level Assignment	All Scenarios Maximum Monthly Percent Water Demand
Significant	> 50%
Moderate	20% to 50%
Low	< 20%

Future Scenario and Future Scenario with Climate Change

The goal of the current scenario is designed to identify stress as a result of existing water use, while the goal of the 25-year future scenario is to identify watersheds that may become stressed as a result of future urbanization and/or additional drinking water requirements. The surface water percent water demand equation (Eq. 1) was also used in the future scenario. Finally, the stress level was determined by comparing results with the default surface water stress thresholds in Table 3.12. The percent water demand calculation and stress assessment for the climate change scenario uses the same methodology, equation and thresholds described above.

Groundwater Stress Assessment Current Scenario

Following similar procedures in surface water stress assessment, the concept of percent water demand for groundwater was calculated by the following equation (Eq.2). The stress level was determined by comparing results with groundwater stress thresholds listed in Table 3.13. Because groundwater sources and demand tend not to demonstrate significant seasonal variability, annual supply values are deemed to be more appropriate for this exercise. However, peak monthly groundwater demand was also assessed to determine if the

groundwater source could be temporarily over-stressed in the specific months. The resulting groundwater stress level assigned is the maximum of the current and future assessment values for both annual and monthly conditions.

$$\% \text{ Water Demand (Groundwater)} = \frac{Q_{\text{DEMAND (GW)}}}{Q_{\text{SUPPLY (GW)}} - Q_{\text{RESERVE (GW)}}} \times 100 \quad [\text{Eq.2}]$$

Table 3.13: Groundwater stress thresholds

Groundwater Quantity Stress Level Assignment	All Scenarios	
	Average Annual	Monthly Maximum
Significant	>25%	>50%
Moderate	>10%	>25%
Low	0 to 10%	0 to 25%

Future Scenario and Future Scenario with Climate Change

The equation (Eq.2) of percent water demand for groundwater was also used for the future scenario and the future scenario with climate change. Finally, the stress level was classified by comparing results with the default stress thresholds.

Uncertainty

Uncertainty is inherent in the water budget estimation and stress assessment process. The accuracy of estimates is reliant on the quality of input data, methodology, modeling, and conceptual understanding of the watershed. Overall, the issues related to uncertainty, and data and knowledge gaps are complex and highly qualitative. There is a degree of uncertainty associated with every aspect of the water budget analyses, however, it is impossible to provide a quantitative assessment of this level of uncertainty. Rather one can only say, in very general terms, that the level is low, moderate or high.

It is quite difficult to quantify the uncertainty. However, uncertainty can be evaluated as “low” in watersheds where

- A long-term historical record is available
- High quality dense monitoring data with good quality are provided
- Complex numerical modeling is applied
- Relative studies and research have been conducted to enhance the understanding of the water system.

According to the Ontario Ministry of the Environment (2007), the uncertainty becomes particularly important if a watershed has been assigned a low stress

level and the percent water demand estimate is near the threshold of moderate stress. For that situation, estimates should be checked to make sure that they are conservative.

Lovekin Creek, Bouchette Point Creek and Port Granby Creek are un-gauged watersheds. Although a few spot flow measurements have been taken by Ganaraska Region Conservation Authority staff, there is no permanent gauge station to provide long term historical data needed to set up and verify a numerical model. The Q_{supply} is simulated by using parameters from the calibrated model in the neighbouring watershed. The understanding of the watershed is also limited by few previous studies. The uncertainty is evaluated as “High”. However, the uncertainty is not that important because the calculated percent water demand is quite low when compared to the moderate threshold.

Water Budget Results

Existing Scenario

Figures 3.34 to 3.36 and Tables 3.14 to 3.16 describe the elements of the water budget simulated by CANWET using long-term data under the existing land use scenario. The three watersheds are not gauged and the simulations were conducted using the calibrated parameters of the Wilmot Creek watershed.

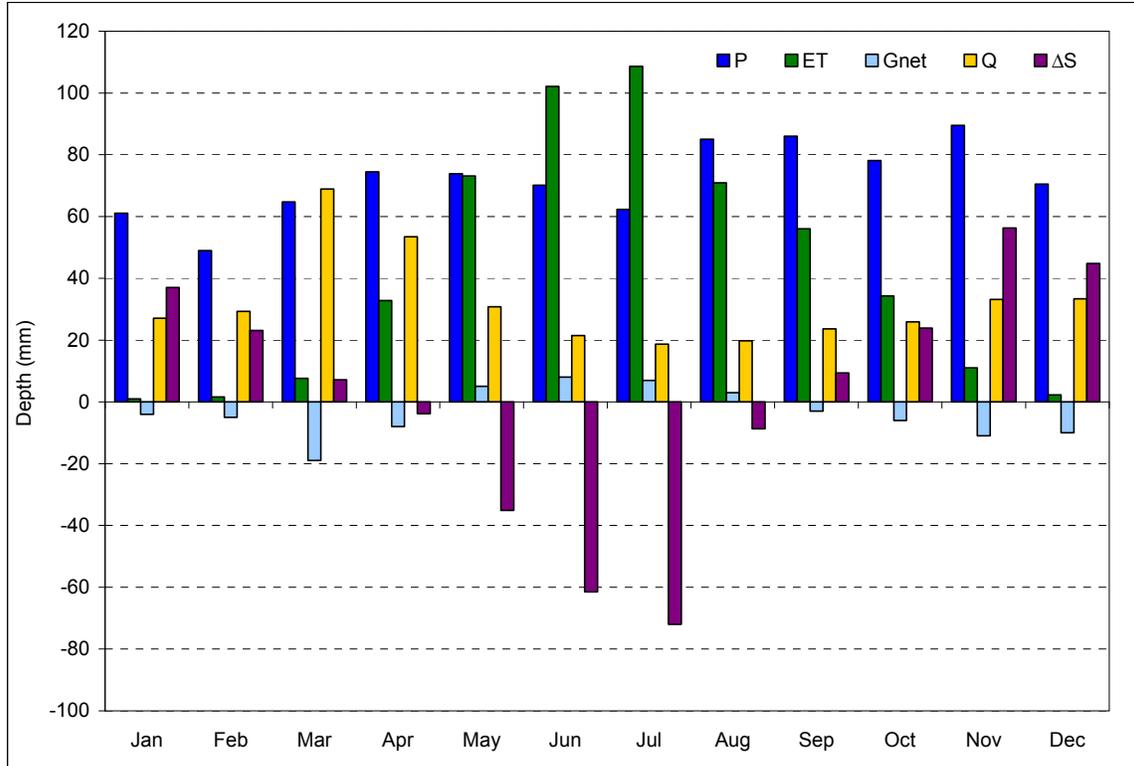


Figure 3.34: Lovekin Creek under existing land use scenario

Table 3.14: Lovekin Creek under existing land use scenario

Month	(P) Precipitation (mm)	(ET) Evapotranspiration (mm)	(G _{net}) Net Groundwater Flow In and Out (mm)	(Q) Stream Flow (mm)	ΔS Change in Storage (mm)
January	61.1	1	-4	27.1	37
February	49	1.6	-5	29.3	23.1
March	64.7	7.6	-19	68.9	7.2
April	74.5	32.8	-8	53.5	-3.8
May	73.8	73.1	5	30.8	-35.1
June	70.1	102.1	8	21.5	-61.5
July	62.3	108.6	7	18.7	-72
August	85	70.9	3	19.8	-8.7
September	86	56	-3	23.6	9.4
October	78.1	34.3	-6	25.9	23.9
November	89.5	11	-11	33.2	56.3
December	70.5	2.3	-10	33.4	44.8
Annual	864.6	501.3	-43	385.7	20.6

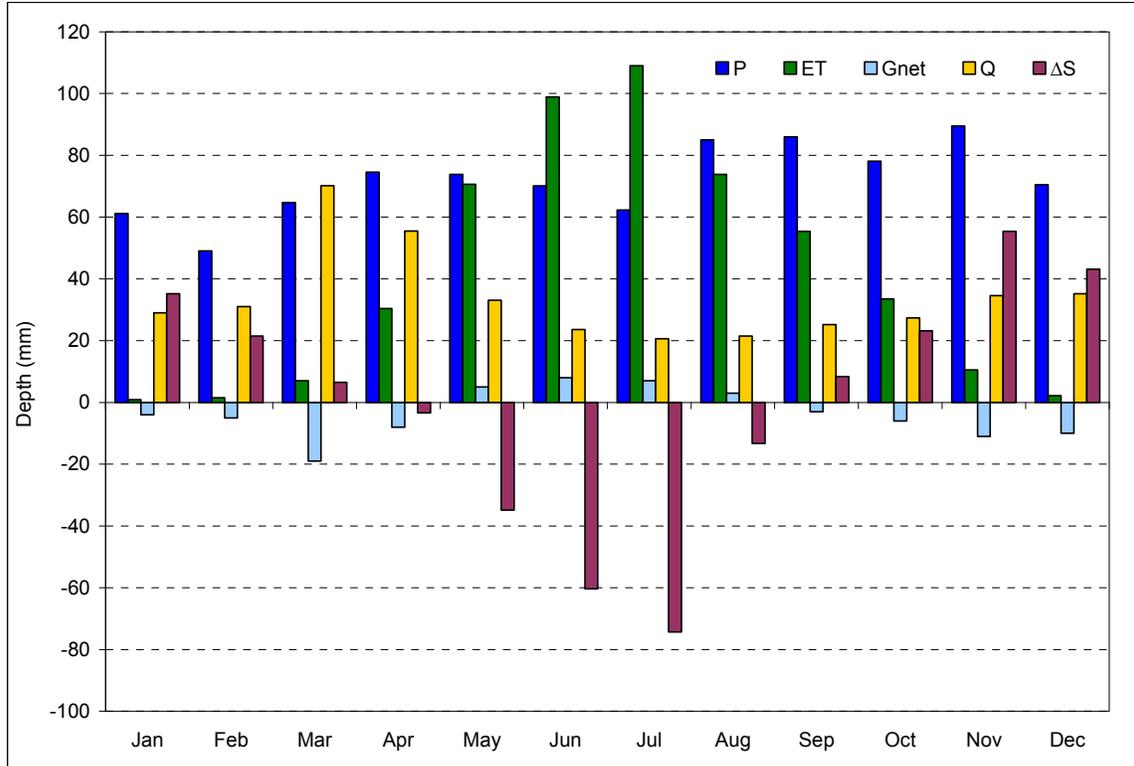


Figure 3.35: Bouchette Point Creek under existing land use scenario

Table 3.15: Bouchette Point Creek under existing land use scenario

Month	(P) Precipitation (mm)	(ET) Evapotranspiration (mm)	(G _{net}) Net Groundwater Flow In and Out (mm)	(Q) Stream Flow (mm)	ΔS Change in Storage (mm)
January	61.1	0.9	-4	29	35.2
February	49	1.5	-5	31	21.5
March	64.7	7	-19	70.2	6.5
April	74.5	30.4	-8	55.5	-3.4
May	73.8	70.6	5	33.1	-34.9
June	70.1	98.9	8	23.6	-60.4
July	62.3	109	7	20.6	-74.3
August	85	73.8	3	21.5	-13.3
September	86	55.4	-3	25.2	8.4
October	78.1	33.5	-6	27.4	23.2
November	89.5	10.5	-11	34.6	55.4
December	70.5	2.2	-10	35.2	43.1
Annual	864.6	493.7	-43	406.9	7

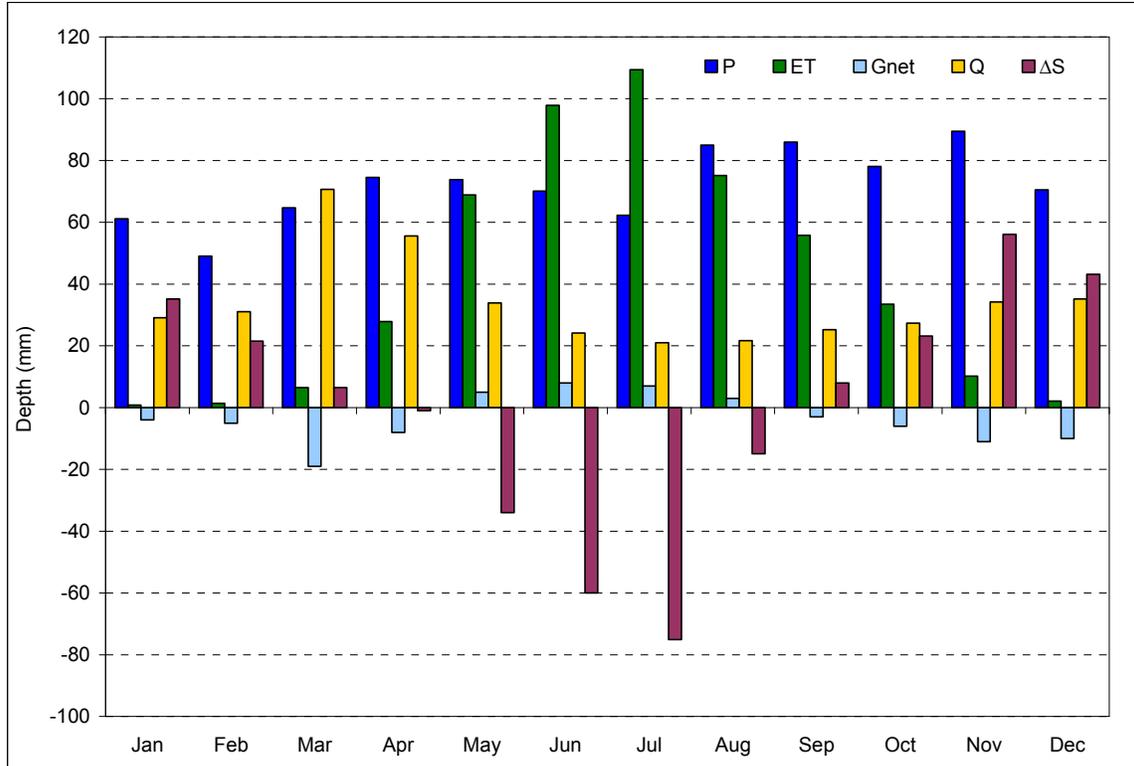


Figure 3.36: Port Granby Creek under existing land use scenario

Table 3.16: Port Granby Creek under existing land use scenario

Month	(P) Precipitation (mm)	(ET) Evapotranspiration (mm)	(G _{net}) Net Groundwater Flow In and Out (mm)	(Q) Stream Flow (mm)	ΔS Change in Storage (mm)
January	61.1	0.8	-4	29.1	35.2
February	49	1.4	-5	31.1	21.5
March	64.7	6.5	-19	70.7	6.5
April	74.5	27.9	-8	55.6	-1
May	73.8	68.9	5	33.9	-34
June	70.1	97.9	8	24.2	-60
July	62.3	109.4	7	21	-75.1
August	85	75.2	3	21.7	-14.9
September	86	55.8	-3	25.2	8
October	78.1	33.5	-6	27.4	23.2
November	89.5	10.2	-11	34.2	56.1
December	70.5	2.1	-10	35.2	43.2
Annual	864.6	489.6	-43	409.3	8.7

Future Scenario

Figures 3.37 to 3.39 and Tables 3.17 to 3.19 describe the elements of the water budget simulated by CANWET using long-term existing climate data under the projected future land use (Figure 3.31) scenario. The results showed negligible increase in stream flow compared to the existing land use scenarios.

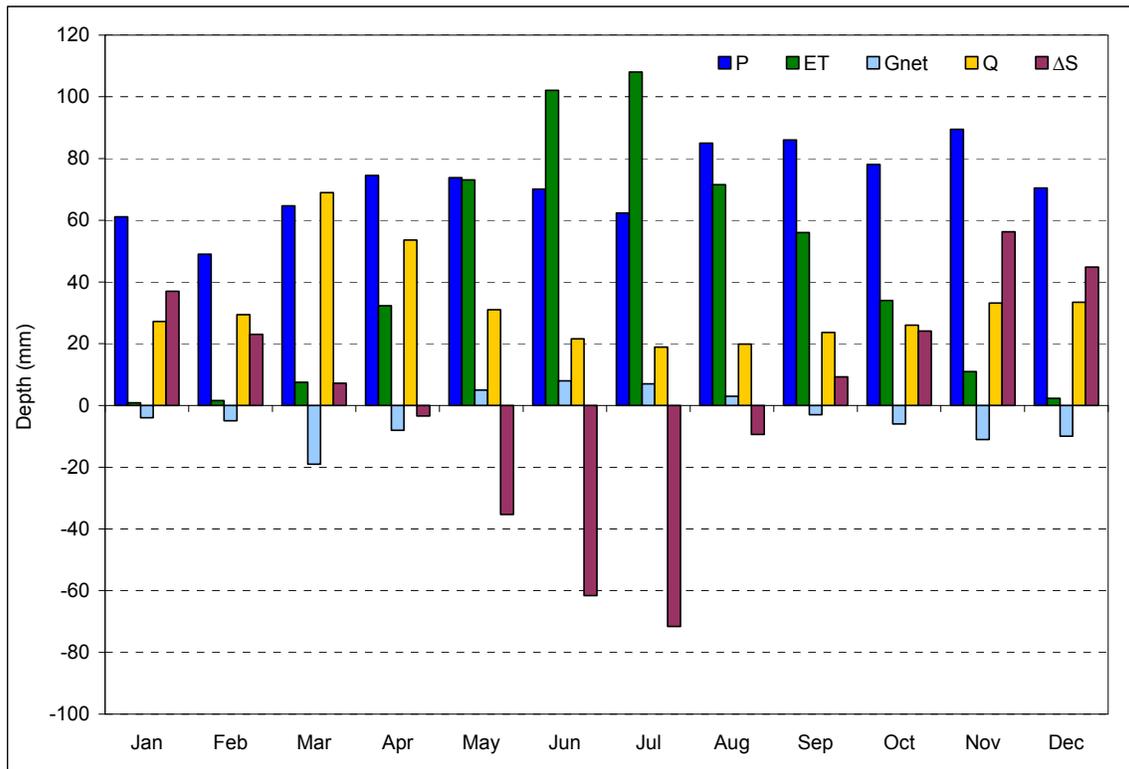


Figure 3.37: Lovekin Creek under future land use scenario

Table 3.17: Lovekin Creek under future land use scenario

Month	(P) Precipitation (mm)	(ET) Evapotranspiration (mm)	(G _{net}) Net Groundwater Flow In and Out (mm)	(Q) Stream Flow (mm)	ΔS Change in Storage (mm)
January	61.1	0.9	-4	27.2	37
February	49	1.6	-5	29.4	23
March	64.7	7.5	-19	69	7.2
April	74.5	32.3	-8	53.6	-3.4
May	73.8	73.1	5	31	-35.3
June	70.1	102.1	8	21.6	-61.6
July	62.3	108	7	18.9	-71.6
August	85	71.5	3	19.9	-9.4
September	86	56	-3	23.7	9.3
October	78.1	34	-6	26	24.1
November	89.5	11	-11	33.2	56.3
December	70.5	2.3	-10	33.4	44.8
Annual	864.6	500.3	-43	386.9	

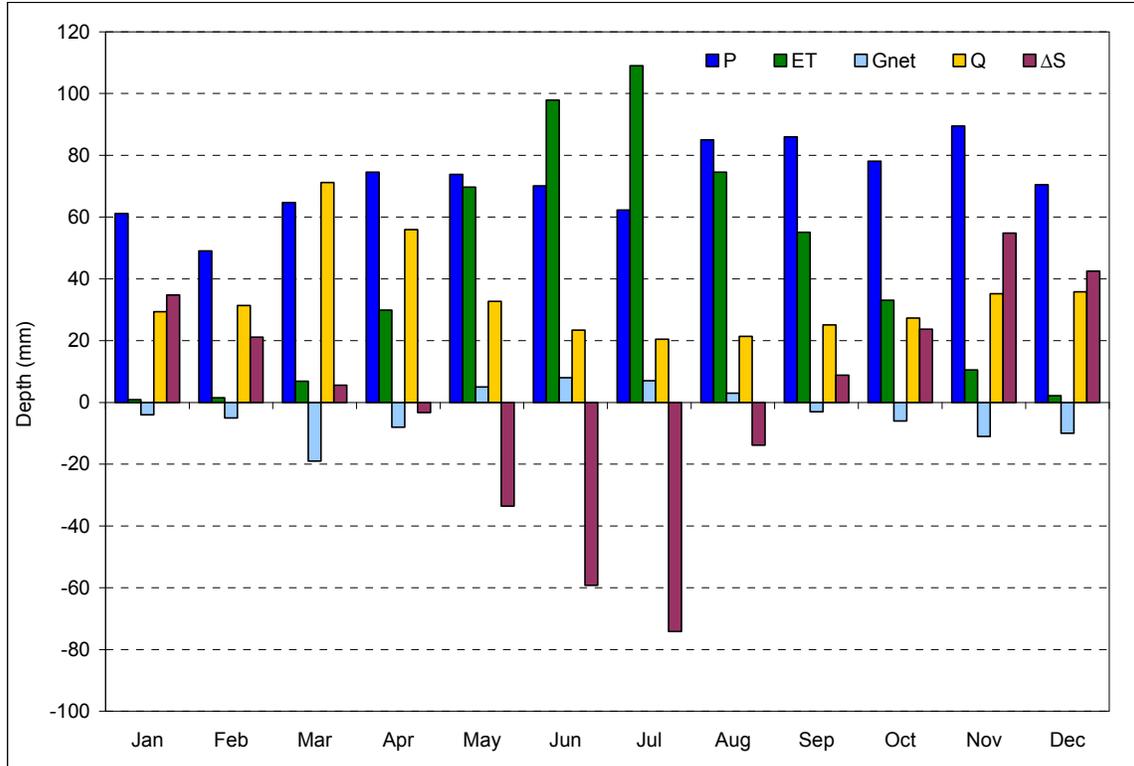


Figure 3.38: Bouchette Point Creek under future land use scenario

Table 3.18: Bouchette Point Creek under future land use scenario

Month	(P) Precipitation (mm)	(ET) Evapotranspiration (mm)	(G _{net}) Net Groundwater Flow In and Out (mm)	(Q) Stream Flow (mm)	ΔS Change in Storage (mm)
January	61.1	0.9	-4	29.4	34.8
February	49	1.5	-5	31.4	21.1
March	64.7	6.9	-19	71.2	5.6
April	74.5	29.9	-8	55.9	-3.3
May	73.8	69.7	5	32.7	-33.6
June	70.1	97.9	8	23.4	-59.2
July	62.3	109	7	20.5	-74.2
August	85	74.5	3	21.4	-13.9
September	86	55.1	-3	25.1	8.8
October	78.1	33.1	-6	27.3	23.7
November	89.5	10.5	-11	35.2	54.8
December	70.5	2.2	-10	35.8	42.5
Annual	864.6	491.2	-43	409.3	7.1

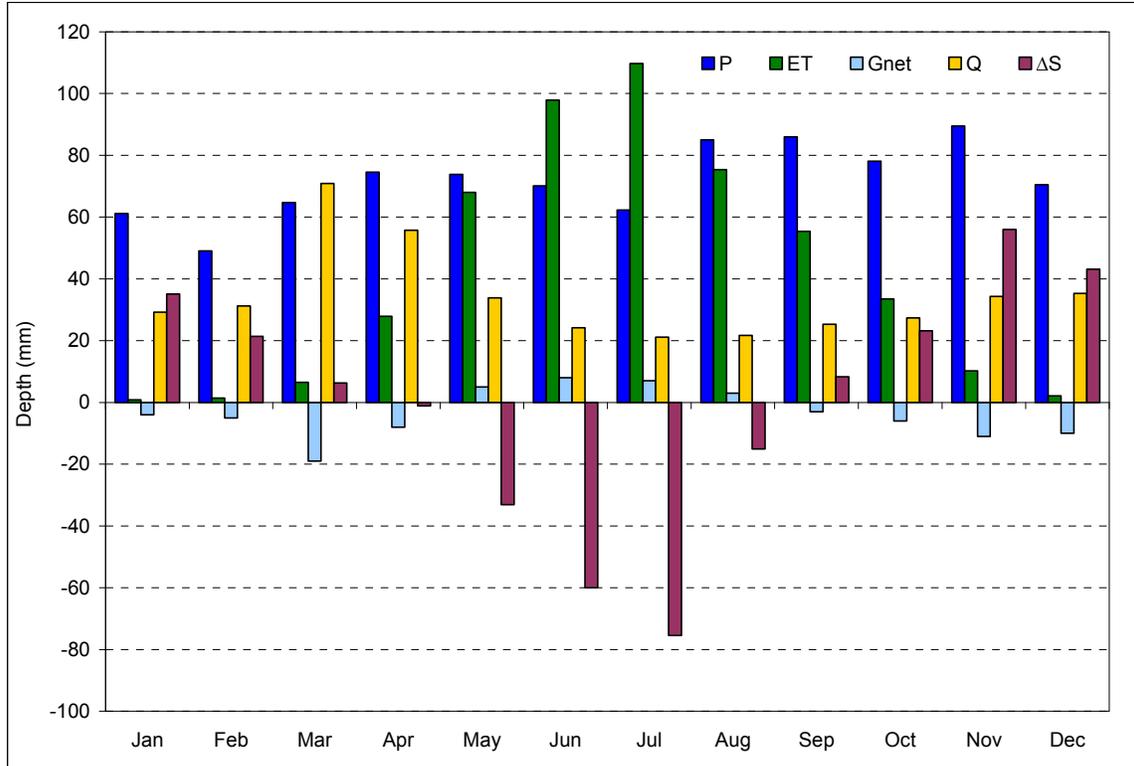


Figure 3.39: Port Granby Creek under future land use scenario

Table 3.19: Port Granby Creek under future land use scenario

Month	(P) Precipitation (mm)	(ET) Evapotranspiration (mm)	(G _{net}) Net Groundwater Flow In and Out (mm)	(Q) Stream Flow (mm)	ΔS Change in Storage (mm)
January	61.1	0.8	-4	29.2	35.1
February	49	1.4	-5	31.2	21.4
March	64.7	6.5	-19	70.9	6.3
April	74.5	27.9	-8	55.7	-1.1
May	73.8	68	5	33.9	-33.1
June	70.1	97.9	8	24.2	-60
July	62.3	109.7	7	21.1	-75.5
August	85	75.4	3	21.7	-15.1
September	86	55.4	-3	25.3	8.3
October	78.1	33.5	-6	27.4	23.2
November	89.5	10.2	-11	34.3	56
December	70.5	2.1	-10	35.3	43.1
Annual	864.6	488.8	-43	410.2	8.6

Future Scenario with Climate Change

Figures 3.40 to 3.42 and Tables 3.20 to 3.22 describe the elements of the water budget simulated by CANWET using long-term climate data simulated by the Canadian Global Climate Model (CGCM) considering climate change for the

2021 to 2040 period under the projected future land use scenario. The CGCM predicts considerable increase in annual precipitation (about 40%) and as a result, the CANWET model simulates significant increase in stream flow.

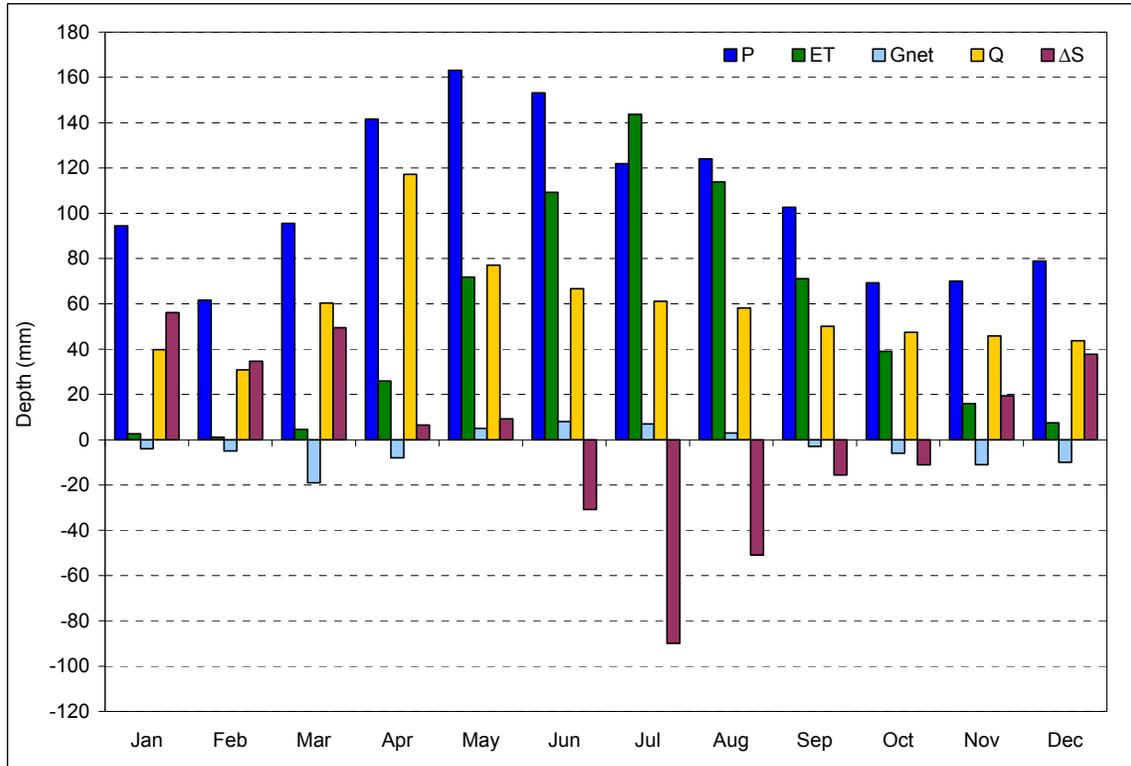


Figure 3.40: Lovekin Creek under future land use scenario with climate change

Table 3.20: Lovekin Creek under future land use scenario with climate change

Month	(P) Precipitation (mm)	(ET) Evapotranspiration (mm)	(G _{net}) Net Groundwater Flow In and Out (mm)	(Q) Stream Flow (mm)	ΔS Change in Storage (mm)
January	94.5	2.6	-4	39.8	56.1
February	61.6	1.1	-5	30.8	34.7
March	95.5	4.6	-19	60.4	49.5
April	141.6	26	-8	117.2	6.4
May	163.1	71.8	5	77.1	9.2
June	153.2	109.3	8	66.7	-30.8
July	121.9	143.7	7	61.1	-89.9
August	124	113.8	3	58.2	-51
September	102.6	71.1	-3	50.1	-15.6
October	69.3	39	-6	47.4	-11.1
November	70.1	15.9	-11	45.8	19.4
December	78.9	7.4	-10	43.7	37.8
Annual	1276.3	606.3	-43	698.3	14.7

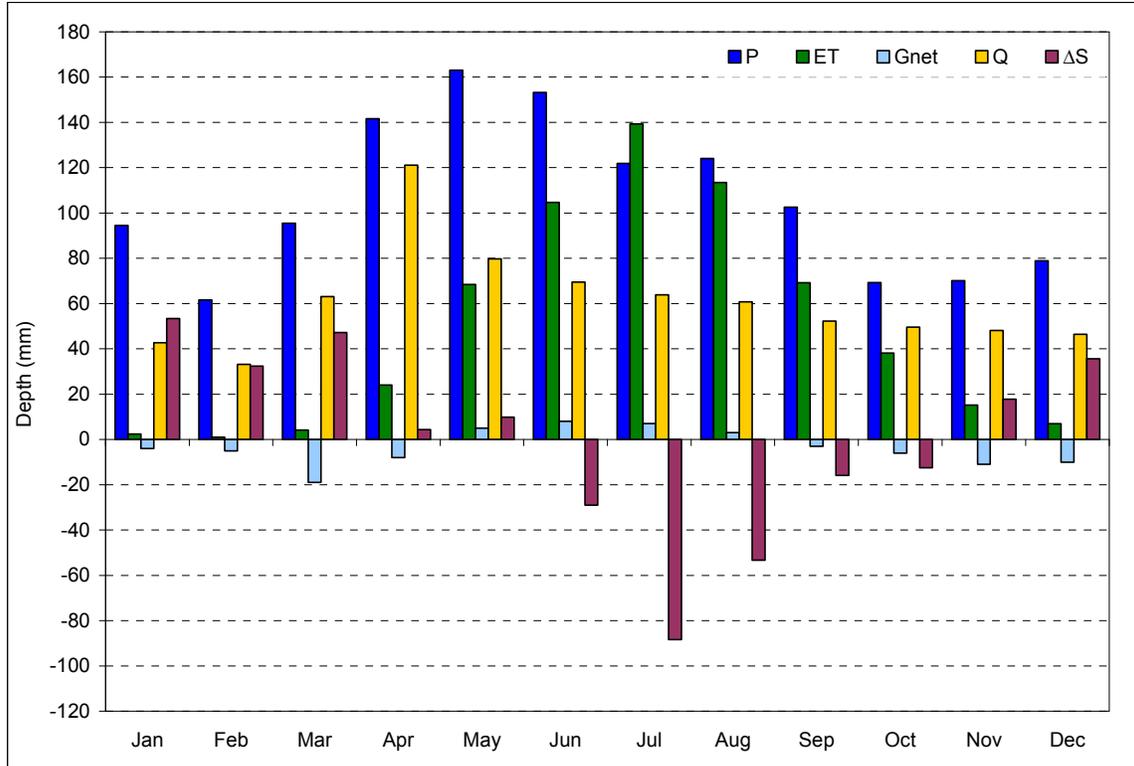


Figure 3.41: Bouchette Point Creek under future land use scenario with climate change

Table 3.21: Bouchette Point Creek under future land use scenario with climate change

Month	(P) Precipitation (mm)	(ET) Evapotranspiration (mm)	(G _{net}) Net Groundwater Flow In and Out (mm)	(Q) Stream Flow (mm)	ΔS Change in Storage (mm)
January	94.5	2.4	-4	42.7	53.4
February	61.6	1	-5	33.2	32.4
March	95.5	4.2	-19	63.1	47.2
April	141.6	24.1	-8	121.1	4.4
May	163.1	68.4	5	79.8	9.9
June	153.2	104.7	8	69.5	-29
July	121.9	139.3	7	63.9	-88.3
August	124	113.5	3	60.8	-53.3
September	102.6	69.2	-3	52.3	-15.9
October	69.3	38.2	-6	49.6	-12.5
November	70.1	15.2	-11	48.1	17.8
December	78.9	6.9	-10	46.4	35.6
Annual	1276.3	587.1	-43	730.5	1.7

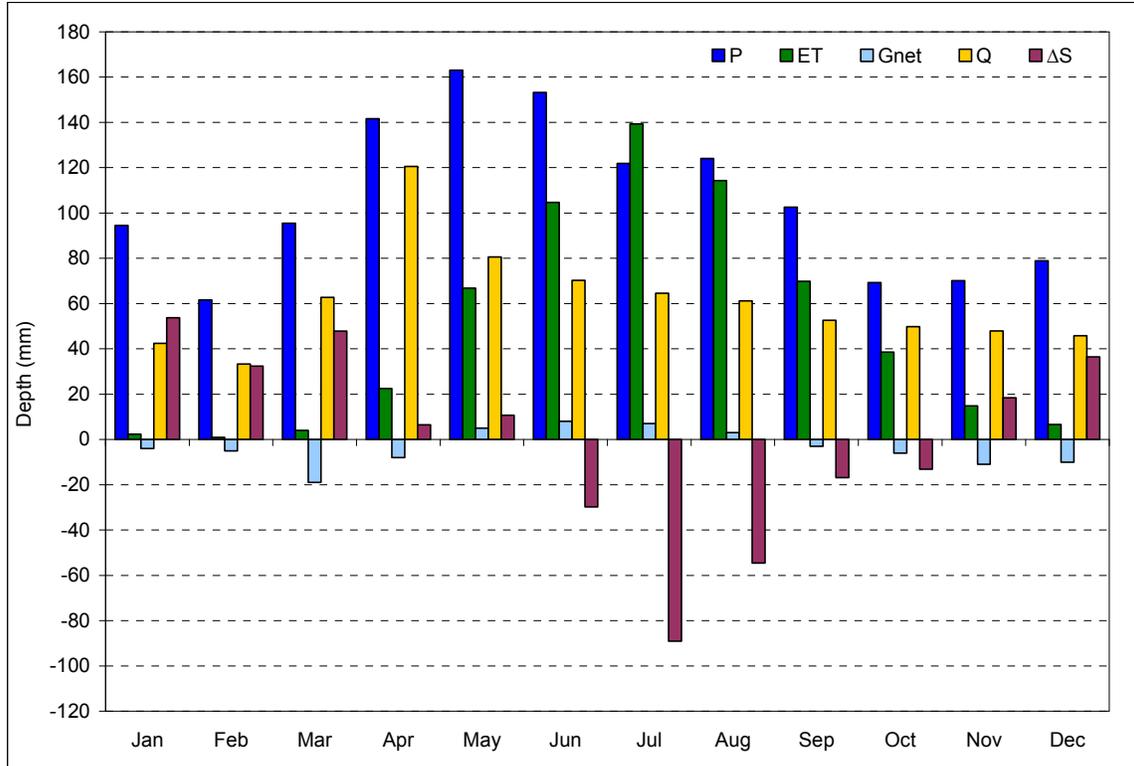


Figure 3.42: Port Granby Creek under future land use scenario with climate change

Table 3.22: Port Granby Creek under future land use scenario with climate change

Month	(P) Precipitation (mm)	(ET) Evapotranspiration (mm)	(G _{net}) Net Groundwater Flow In and Out (mm)	(Q) Stream Flow (mm)	ΔS Change in Storage (mm)
January	94.5	2.3	-4	42.4	53.8
February	61.6	0.9	-5	33.3	32.4
March	95.5	4	-19	62.7	47.8
April	141.6	22.5	-8	120.6	6.5
May	163.1	66.8	5	80.6	10.7
June	153.2	104.7	8	70.3	-29.8
July	121.9	139.3	7	64.6	-89
August	124	114.3	3	61.2	-54.5
September	102.6	69.8	-3	52.6	-16.8
October	69.3	38.6	-6	49.8	-13.1
November	70.1	14.8	-11	47.9	18.4
December	78.9	6.6	-10	45.8	36.5
Annual	1276.3	584.6	-43	731.8	2.9

Stress Assessment

Water Supply and Water Reserve

Water supply and water reserve are estimated using the methodology described above and the results are reported in Tables 3.24 to 3.47.

Water Demand

There are three PTTW in the watershed (Figure 3.33). There is no watershed based municipal drinking water system; however 92% of the watershed residents in Bouchette Point Creek watershed are serviced by the Newcastle municipal water system taking water from Lake Ontario.

The total water demand for the existing scenario is summarised in Tables 3.23, 3.31, 3.39. In all watersheds groundwater demand is greater than surface water. The details of existing groundwater and surface water demand for each month are shown in Tables 3.24; 3.32 and 3.40. Both groundwater and surface water are indicated as having a significant higher usage in summer due to a predominant use for irrigation.

Table 3.23: Water demand summary for existing scenario (m³)

Watershed	Total Demand	PTTW	Non-Serviced Residential	Non-PTTW Agriculture
Lovekin Creek	55,156	29,591	15,049	10,516
Bouchette Point Creek	101,097	90,357	975	9,765
Port Granby Creek	33,747	23,228	5,502	5,018

The water demand for the 25-year future scenario only considers the increase for non-served population water use which is adjusted by a projected population increase rate. Surface water demand is the same as the existing scenario; while 4% increase is presented in groundwater demand for the future scenario (Table 3.25; 3.33 and 3.41).

Stress Assessment

Percent water demand calculation and stress assessment were calculated and are shown in Tables 3.24 to 3.47. There is no indication that there are stresses under all three scenarios for both surface water and groundwater in all three watersheds.

Water Budget and Stress Assessment Summary

Three scenarios were run for the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds: existing conditions, future conditions, and future conditions under climate change effects. Both the existing and future conditions show that the watersheds receive approximately 860 mm of precipitation a year. A large portion of this water is lost through evapotranspiration that increases in April and declines in October, with peak rates occurring in June and July.

Groundwater recharge happens largely in March, April, October, November and December, and stream flow increases in March and April due to the spring freshet. Changes in storage occur from May to August, with the greatest loss occurring in July. This means that water stored in surface water, soil moisture and groundwater is being depleted through natural cycles and water use. Water is put back to storage in the period from September to April.

Under a scenario of future conditions with climate change effects, these watersheds are expected to receive more precipitation, experience higher evapotranspiration rates, and experience more surface flows (due to increased precipitation). However, this provides a basic glimpse of a future with climate change. More work is required for modeling climate change.

Within the three watersheds, the surface water and groundwater stress assessment results in a “low” level of stress from water taking reliability and water quantity perspective.

Table 3.24: Lovekin Creek watershed existing water demand estimation

Unit: m³

Demand Type	Annual	January	February	March	April	May	June	July	August	September	October	November	December
PTTW	29,591	2,466											
Groundwater	29,591	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466
Surface Water	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-Residential (G)	15,049	1,254											
Non-Agriculture (S)	10,516	10	10	10	10	10	10	5,208	5,208	10	10	10	10
Total	55,156	3,730	3,730	3,730	3,730	3,730	3,730	8,928	8,928	3,730	3,730	3,730	3,730
Groundwater	44,640	3,720	3,720	3,720	3,720	3,720	3,720	3,720	3,720	3,720	3,720	3,720	3,720
Surface Water	10,516	10	10	10	10	10	10	5,208	5,208	10	10	10	10

PTTW	4.14	0.34											
Groundwater	4.14	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34
Surface Water	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-Residential (G)	2.10	0.18											
Non-Agriculture (S)	1.47	0.00	0.00	0.00	0.00	0.00	0.00	0.73	0.73	0.00	0.00	0.00	0.00
Total	7.71	0.52	0.52	0.52	0.52	0.52	0.52	1.25	1.25	0.52	0.52	0.52	0.52
Groundwater	6.24	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52
Surface Water	1.47	0.00	0.00	0.00	0.00	0.00	0.00	0.73	0.73	0.00	0.00	0.00	0.00

Table 3.25: Lovekin Creek watershed future water demand estimation

Unit: m³

Demand Type	Annual	January	February	March	April	May	June	July	August	September	October	November	December
PTTW	29,591	2,466											
Groundwater	29,591	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466	2,466
Surface Water	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-Serviced Residential (G)	16,749	1,396											
Non-PTTW Agriculture (S)	10,516	10	10	10	10	10	10	5,208	5,208	10	10	10	10
Total	56,856	3,872	3,872	3,872	3,872	3,872	3,872	9,069	9,069	3,872	3,872	3,872	3,872
Groundwater	46,340	3,862	3,862	3,862	3,862	3,862	3,862	3,862	3,862	3,862	3,862	3,862	3,862
Surface Water	10,516	10	10	10	10	10	10	5,208	5,208	10	10	10	10

Unit: mm

PTTW	4.14	0.34											
Groundwater	4.14	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34
Surface Water	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-Serviced Residential (G)	2.34	0.20											
Non-PTTW Agriculture (S)	1.47	0.00	0.00	0.00	0.00	0.00	0.00	0.73	0.73	0.00	0.00	0.00	0.00
Total	7.95	0.54	0.54	0.54	0.54	0.54	0.54	1.27	1.27	0.54	0.54	0.54	0.54
Groundwater	6.48	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54
Surface Water	1.47	0.00	0.00	0.00	0.00	0.00	0.00	0.73	0.73	0.00	0.00	0.00	0.00

Table 3.26: Lovekin Creek watershed surface water stress calculation (existing scenario)

Month	Water Supply (Q _{p50})		Water Reserve (Tessman)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.07	25.36	0.04	13.09	0.03	12.27	10	0.001	0.01%	Low	High
February	0.07	26.47	0.04	13.09	0.04	13.38	10	0.001	0.01%	Low	High
March	0.20	72.48	0.08	27.94	0.12	44.54	10	0.001	0.00%	Low	High
April	0.15	53.66	0.06	21.80	0.09	31.87	10	0.001	0.00%	Low	High
May	0.09	32.49	0.04	13.09	0.05	19.40	10	0.001	0.01%	Low	High
June	0.06	22.12	0.04	13.09	0.03	9.03	10	0.001	0.02%	Low	High
July	0.06	20.43	0.04	13.09	0.02	7.34	5208	0.728	9.92%	Low	High
August	0.06	22.01	0.04	13.09	0.02	8.92	5208	0.728	8.17%	Low	High
September	0.07	24.87	0.04	13.09	0.03	11.77	10	0.001	0.01%	Low	High
October	0.08	27.00	0.04	13.09	0.04	13.91	10	0.001	0.01%	Low	High
November	0.09	31.30	0.04	13.70	0.05	17.59	10	0.001	0.01%	Low	High
December	0.09	34.03	0.04	13.76	0.06	20.27	10	0.001	0.01%	Low	High

Table 3.27: Lovekin Creek watershed surface water stress calculation (future scenario)

Month	Water Supply (Q _{p50})		Water Reserve (Tessman)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.07	25.38	0.04	13.12	0.03	12.26	10	0.001	0.01%	Low	High
February	0.07	26.53	0.04	13.12	0.04	13.41	10	0.001	0.01%	Low	High
March	0.20	72.51	0.08	27.96	0.12	44.55	10	0.001	0.00%	Low	High
April	0.15	53.77	0.06	21.84	0.09	31.93	10	0.001	0.00%	Low	High
May	0.09	32.69	0.04	13.12	0.05	19.57	10	0.001	0.01%	Low	High
June	0.06	22.27	0.04	13.12	0.03	9.15	10	0.001	0.02%	Low	High
July	0.06	20.54	0.04	13.12	0.02	7.41	5208	0.728	9.83%	Low	High
August	0.06	22.10	0.04	13.12	0.02	8.98	5208	0.728	8.11%	Low	High
September	0.07	24.91	0.04	13.12	0.03	11.79	10	0.001	0.01%	Low	High
October	0.08	27.03	0.04	13.12	0.04	13.91	10	0.001	0.01%	Low	High
November	0.09	31.29	0.04	13.70	0.05	17.59	10	0.001	0.01%	Low	High
December	0.09	34.07	0.04	13.78	0.06	20.29	10	0.001	0.01%	Low	High

Table 3.28: Lovekin Creek watershed surface water stress calculation (future scenario with climate change)

Month	Water Supply (Q_{p50})		Water Reserve (Q_{p10})		Water Supply-Water Reserve		Water Demand (Q_{demand})			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.11	39.24	0.06	22.03	0.05	17.20	10	0.001	0.01%	Low	High
February	0.07	25.40	0.05	18.88	0.02	6.52	10	0.001	0.02%	Low	High
March	0.16	58.59	0.09	33.89	0.07	24.71	10	0.001	0.01%	Low	High
April	0.31	111.43	0.16	58.33	0.15	53.10	10	0.001	0.00%	Low	High
May	0.19	68.97	0.13	45.02	0.07	23.95	10	0.001	0.01%	Low	High
June	0.20	70.67	0.13	45.92	0.07	24.74	10	0.001	0.01%	Low	High
July	0.17	62.68	0.12	41.61	0.06	21.06	5208	0.728	3.46%	Low	High
August	0.16	58.19	0.11	37.91	0.06	20.28	5208	0.728	3.59%	Low	High
September	0.13	48.28	0.10	37.49	0.03	10.79	10	0.001	0.01%	Low	High
October	0.12	43.86	0.10	37.64	0.02	6.22	10	0.001	0.02%	Low	High
November	0.12	43.85	0.10	36.85	0.02	7.00	10	0.001	0.02%	Low	High
December	0.11	38.86	0.09	32.03	0.02	6.84	10	0.001	0.02%	Low	High

Table 3.29: Lovekin Creek watershed groundwater stress calculation (existing scenario)

Month	Water Supply (Q_r+Q_{net})		Water Reserve (10% supply)		Water Supply-Water Reserve		Water Demand (Q_{demand})			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
February	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
March	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
April	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
May	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
June	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
July	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
August	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
September	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
October	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
November	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
December	0.08	28.38	0.008	2.84	0.07	25.55	3720	0.518	2.03%	Low	Low
Annual	0.95	340.60	0.095	34.06	0.85	306.54	44640	6.217	2.03%	Low	Low

Table 3.30: Lovekin Creek watershed groundwater stress calculation (future scenario)

Month	Water Supply (Q _r +Q _{net})		Water Reserve (10% supply)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
February	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
March	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
April	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
May	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
June	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
July	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
August	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
September	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
October	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
November	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
December	0.08	28.48	0.008	2.85	0.07	25.64	3862	0.540	2.11%	Low	Low
Annual	0.95	341.80	0.095	34.18	0.85	307.62	46340	6.481	2.11%	Low	Low

Table 3.31: Lovekin Creek watershed groundwater stress calculation (future scenario with climate change)

Month	Water Supply (Q _r +Q _{net})		Water Reserve (10% supply)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
February	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
March	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
April	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
May	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
June	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
July	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
August	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
September	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
October	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
November	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
December	0.14	49.97	0.014	5.00	0.12	44.97	3862	0.540	1.20%	Low	High
Annual	1.67	599.60	0.167	59.96	1.50	539.64	46340	6.481	1.20%	Low	High

Table 3:32: Bouchette Point Creek watershed existing water demand estimation

Unit: m³

Demand Type	Annual	January	February	March	April	May	June	July	August	September	October	November	December
PTTW	90,357	0	0	0	0	0	0	45,179	45,179	0	0	0	0
Groundwater	90,357	0	0	0	0	0	0	45,179	45,179	0	0	0	0
Surface Water	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-Serviced Residential (G)	975	81	81	81	81	81	81						
Non-PTTW Agriculture (S)	9,765	814	814	814	814	814	814						
Total	101,097	895	895	895	895	895	895	46,074	46,074	895	895	895	895
Groundwater	91,332	81	81	81	81	81	81	45,260	45,260	81	81	81	81
Surface Water	9,765	814	814	814	814	814	814	814	814	814	814	814	814

PTTW	3.93	0.00	0.00	0.00	0.00	0.00	0.00	1.96	1.96	0.00	0.00	0.00	0.00
Groundwater	3.93	0.00	0.00	0.00	0.00	0.00	0.00	1.96	1.96	0.00	0.00	0.00	0.00
Surface Water	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-Serviced Residential (G)	0.04	0.00											
Non-PTTW Agriculture (S)	0.42	0.04											
Total	4.40	0.04	0.04	0.04	0.04	0.04	0.04	2.00	2.00	0.04	0.04	0.04	0.04
Groundwater	3.97	0.00	0.00	0.00	0.00	0.00	0.00	1.97	1.97	0.00	0.00	0.00	0.00
Surface Water	0.42	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04

Table 3.33: Bouchette Point Creek watershed future water demand estimation

Unit: m³

Demand Type	Annual	January	February	March	April	May	June	July	August	September	October	November	December
PTTW	90,357	0	0	0	0	0	0	45,179	45,179	0	0	0	0
Groundwater	90,357	0	0	0	0	0	0	45,179	45,179	0	0	0	0
Surface Water	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-Serviced Residential (G)	1,085	90	90	90	90	90	90						
Non-PTTW Agriculture (S)	9,765	814	814	814	814	814	814						
Total	101,207	904	904	904	904	904	904	46,083	46,083	904	904	904	904
Groundwater	91,442	90	90	90	90	90	90	45,269	45,269	90	90	90	90
Surface Water	9,765	814	814	814	814	814	814	814	814	814	814	814	814

Unit: mm

PTTW	3.93	0.00	0.00	0.00	0.00	0.00	0.00	1.96	1.96	0.00	0.00	0.00	0.00
Groundwater	3.93	0.00	0.00	0.00	0.00	0.00	0.00	1.96	1.96	0.00	0.00	0.00	0.00
Surface Water	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-Serviced Residential (G)	0.05	0.00											
Non-PTTW Agriculture (S)	0.42	0.04											
Total	4.40	0.04	0.04	0.04	0.04	0.04	0.04	2.00	2.00	0.04	0.04	0.04	0.04
Groundwater	3.98	0.00	0.00	0.00	0.00	0.00	0.00	1.97	1.97	0.00	0.00	0.00	0.00
Surface Water	0.42	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04

Table 3.34: Bouchette Point Creek watershed surface water stress calculation (existing scenario)

Month	Water Supply (Q _{p50})		Water Reserve (Tessman)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.23	25.71	0.12	13.38	0.11	12.33	814	0.035	0.29%	Low	High
February	0.24	26.89	0.12	13.38	0.12	13.51	814	0.035	0.26%	Low	High
March	0.64	72.46	0.25	28.09	0.39	44.37	814	0.035	0.08%	Low	High
April	0.48	54.56	0.20	22.20	0.29	32.36	814	0.035	0.11%	Low	High
May	0.30	33.73	0.12	13.38	0.18	20.35	814	0.035	0.17%	Low	High
June	0.21	23.19	0.12	13.38	0.09	9.81	814	0.035	0.36%	Low	High
July	0.19	21.11	0.12	13.38	0.07	7.73	814	0.035	0.46%	Low	High
August	0.20	22.47	0.12	13.38	0.08	9.09	814	0.035	0.39%	Low	High
September	0.22	25.20	0.12	13.38	0.10	11.83	814	0.035	0.30%	Low	High
October	0.24	27.21	0.12	13.38	0.12	13.83	814	0.035	0.26%	Low	High
November	0.28	31.49	0.12	13.85	0.16	17.64	814	0.035	0.20%	Low	High
December	0.30	34.29	0.13	14.09	0.18	20.20	814	0.035	0.18%	Low	High

Table 3.35: Bouchette Point Creek watershed surface water stress calculation (future scenario)

Month	Water Supply (Q _{p50})		Water Reserve (Tessman)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.23	26.20	0.12	13.46	0.11	12.73	814	0.035	0.28%	Low	High
February	0.24	27.06	0.12	13.46	0.12	13.60	814	0.035	0.26%	Low	High
March	0.65	73.15	0.25	28.49	0.40	44.66	814	0.035	0.08%	Low	High
April	0.48	54.29	0.20	22.36	0.28	31.93	814	0.035	0.11%	Low	High
May	0.30	33.25	0.12	13.46	0.18	19.79	814	0.035	0.18%	Low	High
June	0.20	23.04	0.12	13.46	0.09	9.58	814	0.035	0.37%	Low	High
July	0.19	20.90	0.12	13.46	0.07	7.43	814	0.035	0.48%	Low	High
August	0.20	22.31	0.12	13.46	0.08	8.84	814	0.035	0.40%	Low	High
September	0.22	25.03	0.12	13.46	0.10	11.56	814	0.035	0.31%	Low	High
October	0.24	27.16	0.12	13.46	0.12	13.70	814	0.035	0.26%	Low	High
November	0.28	31.80	0.12	14.08	0.16	17.72	814	0.035	0.20%	Low	High
December	0.31	34.92	0.13	14.33	0.18	20.59	814	0.035	0.17%	Low	High

Table 3.36: Bouchette Point Creek watershed surface water stress calculation (future scenario with climate change)

Month	Water Supply (Q_{p50})		Water Reserve (Q_{p10})		Water Supply-Water Reserve		Water Demand (Q_{demand})			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.37	41.27	0.198	22.32	0.17	18.95	814	0.035	0.19%	Low	High
February	0.24	27.56	0.169	18.99	0.08	8.57	814	0.035	0.41%	Low	High
March	0.53	59.73	0.323	36.42	0.21	23.31	814	0.035	0.15%	Low	High
April	1.01	114.28	0.537	60.47	0.48	53.80	814	0.035	0.07%	Low	High
May	0.62	69.85	0.406	45.71	0.21	24.14	814	0.035	0.15%	Low	High
June	0.64	72.56	0.418	47.08	0.23	25.48	814	0.035	0.14%	Low	High
July	0.57	63.97	0.383	43.16	0.18	20.81	814	0.035	0.17%	Low	High
August	0.53	60.00	0.348	39.19	0.18	20.81	814	0.035	0.17%	Low	High
September	0.43	48.90	0.343	38.66	0.09	10.24	814	0.035	0.35%	Low	High
October	0.39	44.42	0.343	38.67	0.05	5.75	814	0.035	0.62%	Low	High
November	0.39	44.42	0.332	37.46	0.06	6.97	814	0.035	0.51%	Low	High
December	0.35	39.61	0.288	32.42	0.06	7.18	814	0.035	0.49%	Low	High

Table 3.37: Bouchette Point Creek watershed groundwater stress calculation (existing scenario)

Month	Water Supply (Q_r+Q_{net})		Water Reserve (10% supply)		Water Supply-Water Reserve		Water Demand (Q_{demand})			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
February	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
March	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
April	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
May	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
June	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
July	0.26	29.11	0.026	2.91	0.23	26.20	45260	1.968	7.51%	Low	Low
August	0.26	29.11	0.026	2.91	0.23	26.20	45260	1.968	7.51%	Low	Low
September	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
October	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
November	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
December	0.26	29.11	0.026	2.91	0.23	26.20	81	0.004	0.01%	Low	Low
Annual	3.10	349.30	0.310	34.93	2.79	314.37	91332	3.971	1.26%	Low	Low

Table 3.38: Bouchette Point Creek watershed groundwater stress calculation (future scenario)

Month	Water Supply (Q _r +Q _{net})		Water Reserve (10% supply)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
February	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
March	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
April	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
May	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
June	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
July	0.26	28.92	0.026	2.89	0.23	26.03	45269	1.968	7.56%	Low	Low
August	0.26	28.92	0.026	2.89	0.23	26.03	45269	1.968	7.56%	Low	Low
September	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
October	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
November	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
December	0.26	28.92	0.026	2.89	0.23	26.03	90	0.004	0.02%	Low	Low
Annual	3.08	347.00	0.308	34.7	2.77	312.30	91442	3.976	1.27%	Low	Low

Table 3.39: Bouchette Point Creek watershed groundwater stress calculation (future scenario with climate change)

Month	Water Supply (Q _r +Q _{net})		Water Reserve (10% supply)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
February	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
March	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
April	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
May	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
June	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
July	0.45	51.03	0.045	5.10	0.41	45.92	45269	1.968	4.29%	Low	Low
August	0.45	51.03	0.045	5.10	0.41	45.92	45269	1.968	4.29%	Low	Low
September	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
October	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
November	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
December	0.45	51.03	0.045	5.10	0.41	45.92	90	0.004	0.01%	Low	Low
Annual	5.43	612.30	0.543	61.23	4.89	551.07	91442	3.976	0.72%	Low	Low

Table 3.40: Port Granby Creek watershed existing water demand estimation

Unit: m³

Demand Type	Annual	January	February	March	April	May	June	July	August	September	October	November	December
PTTW	23,228	1,973	1,782	1,973	1,909	1,973	1,909	1,973	1,973	1,909	1,973	1,909	1,973
Groundwater	23,228	1,973	1,782	1,973	1,909	1,973	1,909	1,973	1,973	1,909	1,973	1,909	1,973
Surface Water	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-Serviced Residential (G)	5,502	458	458	458	458	458	458						
Non-PTTW Agriculture (S)	5,018	472	472	472	472	472	472	10,185	10,185	472	472	472	472
Total	33,747	2,903	2,712	2,903	2,840	2,903	2,840	12,616	12,616	2,840	2,903	2,840	2,903
Groundwater	28,729	2,431	2,240	2,431	2,368	2,431	2,368	2,431	2,431	2,368	2,431	2,368	2,431
Surface Water	5,018	472	472	472	472	472	472	10,185	10,185	472	472	472	472

PTTW	1.73	0.15	0.13	0.15	0.14	0.15	0.14	0.15	0.15	0.14	0.15	0.14	0.15
Groundwater	1.73	0.15	0.13	0.15	0.14	0.15	0.14	0.15	0.15	0.14	0.15	0.14	0.15
Surface Water	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-Serviced Residential (G)	0.41	0.03											
Non-PTTW Agriculture (S)	0.37	0.04	0.04	0.04	0.04	0.04	0.04	0.76	0.76	0.04	0.04	0.04	0.04
Total	2.52	0.22	0.20	0.22	0.21	0.22	0.21	0.94	0.94	0.21	0.22	0.21	0.22
Groundwater	2.14	0.18	0.17	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18
Surface Water	0.37	0.04	0.04	0.04	0.04	0.04	0.04	0.76	0.76	0.04	0.04	0.04	0.04

Table 3.41: Port Granby Creek watershed future water demand estimation

Unit: m³

Demand Type	Annual	January	February	March	April	May	June	July	August	September	October	November	December
PTTW	23,228	1,973	1,782	1,973	1,909	1,973	1,909	1,973	1,973	1,909	1,973	1,909	1,973
Groundwater	23,228	1,973	1,782	1,973	1,909	1,973	1,909	1,973	1,973	1,909	1,973	1,909	1,973
Surface Water	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-Serviced Residential (G)	6,124	510	510	510	510	510	510						
Non-PTTW Agriculture (S)	5,018	472	472	472	472	472	472	10,185	10,185	472	472	472	472
Total	34,369	2,955	2,764	2,955	2,891	2,955	2,891	12,668	12,668	2,891	2,955	2,891	2,955
Groundwater	29,351	2,483	2,292	2,483	2,419	2,483	2,419	2,483	2,483	2,419	2,483	2,419	2,483
Surface Water	5,018	472	472	472	472	472	472	10,185	10,185	472	472	472	472

Unit: mm

PTTW	1.73	0.15	0.13	0.15	0.14	0.15	0.14	0.15	0.15	0.14	0.15	0.14	0.15
Groundwater	1.73	0.15	0.13	0.15	0.14	0.15	0.14	0.15	0.15	0.14	0.15	0.14	0.15
Surface Water	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-Serviced Residential (G)	0.46	0.04											
Non-PTTW Agriculture (S)	0.37	0.04	0.04	0.04	0.04	0.04	0.04	0.76	0.76	0.04	0.04	0.04	0.04
Total	2.56	0.22	0.21	0.22	0.22	0.22	0.22	0.95	0.95	0.22	0.22	0.22	0.22
Groundwater	2.19	0.19	0.17	0.19	0.18	0.19	0.18	0.19	0.19	0.18	0.19	0.18	0.19
Surface Water	0.37	0.04	0.04	0.04	0.04	0.04	0.04	0.76	0.76	0.04	0.04	0.04	0.04

Table 3.42: Port Granby Creek watershed surface water stress calculation (existing scenario)

Month	Water Supply (Q _{p50})		Water Reserve (Tessman)		Water Supply-Water Reserve		Water Demand (Q _{demand})			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.13	25.51	0.07	13.51	0.06	12.00	472	0.035	0.29%	Low	High
February	0.14	27.13	0.07	13.51	0.07	13.62	472	0.035	0.26%	Low	High
March	0.38	72.83	0.15	28.33	0.23	44.50	472	0.035	0.08%	Low	High
April	0.28	54.52	0.12	22.29	0.17	32.23	472	0.035	0.11%	Low	High
May	0.18	34.59	0.07	13.62	0.11	20.97	472	0.035	0.17%	Low	High
June	0.12	24.09	0.07	13.51	0.05	10.58	472	0.035	0.33%	Low	High
July	0.11	21.59	0.07	13.51	0.04	8.08	10185	0.760	9.41%	Low	High
August	0.12	22.81	0.07	13.51	0.05	9.30	10185	0.760	8.17%	Low	High
September	0.13	25.40	0.07	13.51	0.06	11.89	472	0.035	0.30%	Low	High
October	0.14	27.34	0.07	13.51	0.07	13.83	472	0.035	0.25%	Low	High
November	0.16	31.55	0.07	13.73	0.09	17.82	472	0.035	0.20%	Low	High
December	0.18	33.97	0.07	14.13	0.10	19.84	472	0.035	0.18%	Low	High

Table 3.43: Port Granby Creek watershed surface water stress calculation (future scenario)

Month	Water Supply (Q _{p50})		Water Reserve (Tessman)		Water Supply-Water Reserve		Water Demand (Q _{demand})			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.13	25.65	0.07	13.54	0.06	12.12	472	0.035	0.29%	Low	High
February	0.14	27.20	0.07	13.54	0.07	13.66	472	0.035	0.26%	Low	High
March	0.38	72.94	0.15	28.41	0.23	44.53	472	0.035	0.08%	Low	High
April	0.28	54.50	0.12	22.32	0.17	32.17	472	0.035	0.11%	Low	High
May	0.18	34.55	0.07	13.60	0.11	20.95	472	0.035	0.17%	Low	High
June	0.12	24.15	0.07	13.54	0.05	10.61	472	0.035	0.33%	Low	High
July	0.11	21.61	0.07	13.54	0.04	8.08	10185	0.760	9.41%	Low	High
August	0.12	22.83	0.07	13.54	0.05	9.29	10185	0.760	8.18%	Low	High
September	0.13	25.37	0.07	13.54	0.06	11.83	472	0.035	0.30%	Low	High
October	0.14	27.33	0.07	13.54	0.07	13.79	472	0.035	0.26%	Low	High
November	0.16	31.57	0.07	13.79	0.09	17.78	472	0.035	0.20%	Low	High
December	0.18	34.11	0.07	14.19	0.10	19.92	472	0.035	0.18%	Low	High

Table 3.44: Port Granby Creek watershed surface water stress calculation (future scenario with climate change)

Month	Water Supply (Q_{p50})		Water Reserve (Q_{p10})		Water Supply-Water Reserve		Water Demand (Q_{demand})			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.21	41.06	0.11	22.19	0.10	18.87	472	0.035	0.19%	Low	High
February	0.15	28.17	0.10	19.10	0.05	9.06	472	0.035	0.39%	Low	High
March	0.30	58.71	0.19	36.74	0.11	21.97	472	0.035	0.16%	Low	High
April	0.58	112.85	0.31	59.65	0.28	53.20	472	0.035	0.07%	Low	High
May	0.37	71.24	0.24	47.19	0.12	24.05	472	0.035	0.15%	Low	High
June	0.38	73.56	0.25	48.51	0.13	25.05	472	0.035	0.14%	Low	High
July	0.34	65.04	0.23	44.63	0.11	20.40	10185	0.760	3.72%	Low	High
August	0.31	60.24	0.21	40.23	0.10	20.01	10185	0.760	3.80%	Low	High
September	0.26	49.42	0.20	38.93	0.05	10.50	472	0.035	0.34%	Low	High
October	0.23	44.68	0.20	38.72	0.03	5.96	472	0.035	0.59%	Low	High
November	0.23	43.95	0.20	37.73	0.03	6.22	472	0.035	0.57%	Low	High
December	0.20	39.56	0.17	32.70	0.04	6.85	472	0.035	0.51%	Low	High

Table 3.45: Port Granby Creek watershed groundwater stress calculation (existing scenario)

Month	Water Supply (Q_r+Q_{net})		Water Reserve (10% supply)		Water Supply-Water Reserve		Water Demand (Q_{demand})			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.15	29.63	0.015	2.96	0.14	26.66	2431	0.181	0.68%	Low	Low
February	0.15	29.63	0.015	2.96	0.14	26.66	2240	0.167	0.63%	Low	Low
March	0.15	29.63	0.015	2.96	0.14	26.66	2431	0.181	0.68%	Low	Low
April	0.15	29.63	0.015	2.96	0.14	26.66	2368	0.177	0.66%	Low	Low
May	0.15	29.63	0.015	2.96	0.14	26.66	2431	0.181	0.68%	Low	Low
June	0.15	29.63	0.015	2.96	0.14	26.66	2368	0.177	0.66%	Low	Low
July	0.15	29.63	0.015	2.96	0.14	26.66	2431	0.181	0.68%	Low	Low
August	0.15	29.63	0.015	2.96	0.14	26.66	2431	0.181	0.68%	Low	Low
September	0.15	29.63	0.015	2.96	0.14	26.66	2368	0.177	0.66%	Low	Low
October	0.15	29.63	0.015	2.96	0.14	26.66	2431	0.181	0.68%	Low	Low
November	0.15	29.63	0.015	2.96	0.14	26.66	2368	0.177	0.66%	Low	Low
December	0.15	29.63	0.015	2.96	0.14	26.66	2431	0.181	0.68%	Low	Low
Annual	1.84	355.50	0.184	35.55	1.65	319.95	28729	2.144	0.67%	Low	Low

Table 3.46: Port Granby Creek watershed groundwater stress calculation (future scenario)

Month	Water Supply (Q _r +Q _{net})		Water Reserve (10% supply)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.15	29.61	0.015	2.96	0.14	26.65	2483	0.185	0.70%	Low	Low
February	0.15	29.61	0.015	2.96	0.14	26.65	2292	0.171	0.64%	Low	Low
March	0.15	29.61	0.015	2.96	0.14	26.65	2483	0.185	0.70%	Low	Low
April	0.15	29.61	0.015	2.96	0.14	26.65	2419	0.181	0.68%	Low	Low
May	0.15	29.61	0.015	2.96	0.14	26.65	2483	0.185	0.70%	Low	Low
June	0.15	29.61	0.015	2.96	0.14	26.65	2419	0.181	0.68%	Low	Low
July	0.15	29.61	0.015	2.96	0.14	26.65	2483	0.185	0.70%	Low	Low
August	0.15	29.61	0.015	2.96	0.14	26.65	2483	0.185	0.70%	Low	Low
September	0.15	29.61	0.015	2.96	0.14	26.65	2419	0.181	0.68%	Low	Low
October	0.15	29.61	0.015	2.96	0.14	26.65	2483	0.185	0.70%	Low	Low
November	0.15	29.61	0.015	2.96	0.14	26.65	2419	0.181	0.68%	Low	Low
December	0.15	29.61	0.015	2.96	0.14	26.65	2483	0.185	0.70%	Low	Low
Annual	1.84	355.30	0.184	35.53	1.65	319.77	29351	2.190	0.68%	Low	Low

Table 3.47: Port Granby Creek watershed groundwater stress calculation (future scenario with climate change)

Month	Water Supply (Q _r +Q _{net})		Water Reserve (10% supply)		Water Supply-Water Reserve		Water Demand (Q demand)			Stress Level	Uncertainty
	m ³ /s	mm/month	m ³ /s	mm/month	m ³ /s	mm/month	m ³	mm/month	% Water Demand		
January	0.27	51.87	0.027	5.19	0.24	46.68	2483	0.185	0.40%	Low	Low
February	0.27	51.87	0.027	5.19	0.24	46.68	2292	0.171	0.37%	Low	Low
March	0.27	51.87	0.027	5.19	0.24	46.68	2483	0.185	0.40%	Low	Low
April	0.27	51.87	0.027	5.19	0.24	46.68	2419	0.181	0.39%	Low	Low
May	0.27	51.87	0.027	5.19	0.24	46.68	2483	0.185	0.40%	Low	Low
June	0.27	51.87	0.027	5.19	0.24	46.68	2419	0.181	0.39%	Low	Low
July	0.27	51.87	0.027	5.19	0.24	46.68	2483	0.185	0.40%	Low	Low
August	0.27	51.87	0.027	5.19	0.24	46.68	2483	0.185	0.40%	Low	Low
September	0.27	51.87	0.027	5.19	0.24	46.68	2419	0.181	0.39%	Low	Low
October	0.27	51.87	0.027	5.19	0.24	46.68	2483	0.185	0.40%	Low	Low
November	0.27	51.87	0.027	5.19	0.24	46.68	2419	0.181	0.39%	Low	Low
December	0.27	51.87	0.027	5.19	0.24	46.68	2483	0.185	0.40%	Low	Low
Annual	3.22	622.40	0.322	62.24	2.90	560.16	29351	2.190	0.39%	Low	Low

3.6 GROUNDWATER QUALITY

Groundwater quality is spatially variable, is affected by seasonal changes and local climate, and by the types of soils and rocks through which water moves. When water from rain or snowmelt moves overland and through the ground, water dissolves minerals found in rocks and soils, percolates through organic material such as roots and leaves, and reacts with algae, bacteria, and other microscopic organisms. Each of these natural processes changes groundwater quality. In addition to natural controls over groundwater quality, human influences such as contamination can alter the quality of groundwater.

In the three watersheds, the most common dissolved substances in groundwater are minerals and salts; as a group, are referred to as dissolved solids. Dissolved solids include common constituents such as calcium, sodium and chloride; nutrients such as nitrogen and phosphorus; and trace elements such as selenium, chromium and arsenic (Morrison Environmental Limited 2004). In general, the common, naturally dissolved substances are not considered harmful to human health or aquatic organisms, although some constituents can affect the taste, smell or clarity of water. Nutrients and trace elements in water can be harmful to human health and aquatic life if they exceed standards or guidelines set out by the province through the *Ontario Drinking Water Objectives*. Dissolved gases such as oxygen and methane are common in groundwater.

Groundwater quality data is potentially available from a wide variety of sources including the Ontario Ministry of the Environment Water Well Records Database, the Provincial Groundwater Monitoring Network, private well sampling, municipal water sampling programs, and local and site-specific groundwater studies. The first step in reporting groundwater quality is to collect all the available data to allow a water quality comparison on a spatial (vertically in aquifer/aquitard units and horizontally in an individual aquifer) and temporal scale for a variety of parameters. At this time there is limited data, data gaps and other limitations affecting groundwater quality analysis. In addition, water quality data can only be inferred to a site-specific location, and not necessarily to an aquifer.

3.6.1 Groundwater Quality in Private Water Supply Wells

The majority of the water provided to residents in the three watersheds come from private wells except for areas around Newtonville and Newcastle that are serviced from the Newcastle Water Supply System. Many of these private wells supply water to permanent residents, whereas other wells are used for agricultural purposes including livestock watering, irrigation, and a small number of wells are used for commercial and industrial purposes.

It is important to identify aquifer types when assessing groundwater quality which can be done using information from the Ministry of the Environment Water Well Record Database. The sand and gravel deposits of glaciofluvial and glaciolacustrine origins are the main aquifers in the area. In the Lovekin three

watersheds, overburden, bedrock, and flowing artesian wells have been identified. Overburden wells are more important as a source of private water supply wells. Generally bedrock wells are concentrated in the southern part of the three watersheds where overburden is relatively thin.

General information related to the quality of groundwater is available from the Ministry of the Environment Water Well Record Database. Bedrock wells have the potential to produce salty, sulphurous or mineral water, and other well water contains gas (Singer et al. 2003). Faced with major difficulties in assessing the data available, Singer et al. (2003) have not provided a detailed description of groundwater quality in the overburden aquifers. The description of groundwater quality within the overburden was given in terms of quality parameters and water type rather than in terms of specific overburden units. The parameters that were considered include sodium, iron, chloride, sulphate, nitrate, total hardness and total dissolved solids.

Most of the MOE Water Well Record Database includes information related to groundwater encountered such as fresh, salty, sulphurous, or containing iron or gas. The well driller, as part of the well record requirements, normally submits this information to the MOE. Usually the driller visually examines a water sample taken from the well for clarity. The driller then smells and tastes the water and enters appropriate observations into the well record. These observations are very useful especially when the water tastes salty or smells like a rotten egg, showing the presence of sodium chloride or hydrogen sulphide. The driller's observations are subjective and are therefore inadequate for determining the suitability of groundwater for drinking purposes.

Due to the limited data availability at this time, the above sections provide general information about groundwater quality in the three watersheds. In addition, it is known that site-specific groundwater quality issues occur in the three watersheds, however details of these occurrences are unknown. Many times however, it is poor private well maintenance and conditions that lead to negative groundwater quality results, rather than contaminated aquifers.

3.7 SURFACE WATER QUALITY

The quality of surface water is influenced by the surrounding landscape and in stream transformations. Land use and cover in a watershed can influence water chemistry and integrity of the stream environment. Non-point sources (i.e., runoff) that enter surface water contain components of the drainage area. Surrounding land use and cover therefore play an important role in the type and amount of nutrient, bacteria, chemical and metal loading that occurs in a water system. Modes of transportation into a water body such as a stream include point sources (direct) and non-point sources (indirect), atmospheric deposition (precipitation and dust), internal transportation (nutrient cycling), and groundwater inputs. Surface water quality modeling helps to understand how the landscape and land

uses contribute to surface water quality. At this time however, surface water quality modeling is not yet available.

Quality water is needed for a healthy aquatic ecosystem, from an entire ecosystem perspective and from a human needs standpoint. Many guidelines exist that set out limits for certain parameters as they relate to aquatic organism toxicity levels, unsafe use of water for recreational activities, agricultural purposes and for human consumption. In Ontario the provincial government has set out *Provincial Water Quality Objectives* based on uses such as aquatic life needs and recreation (Ontario Ministry of Environment and Energy 1999).

In addition to provincial guidelines, the federal government has set out *Canadian Water Quality Guidelines* based on aquatic life, recreation and agricultural use (Canadian Council of Ministers of the Environment 2006). Both governments also have drinking water quality objectives or guidelines that set limits on water quality parameters so that drinking water is safe for human consumption (Ontario Ministry of the Environment 2003; Canadian Council of Ministers of the Environment 2006). These guidelines and objectives help to rank and understand water quality in terms of an environmental or human need.

When analyzing the surface water quality, *Provincial Water Quality Objectives* related to aquatic life tolerance or recreational water usage will be used. Where provincial objectives do not exist, *Canadian Water Quality Guidelines* for aquatic life tolerance will be used. In order to characterize the surface water quality of the study creeks, water quality parameter trends through time will be analyzed and current surface water quality will be examined.

3.7.1 Methods

Surface Water Quality Data Sets

Data from the Ganaraska Region Water Quality Monitoring Network (GRWQMN) exists for Lovekin Creek, Bouchette Point Creek and Port Granby Creek. Table 3.48 outlines the GRWQMN sample sites and Figure 3.43 shows their locations. In 2009 a Baseflow Water Quality Monitoring Program was carried out. Since a streams experiences baseflow conditions (groundwater contribution only) 70% of the time, water quality should be consistent 70% of the time unless it is affected by point source contamination. 16 sites (Figure 3.44) were sampled throughout the three watersheds on August 25th and 28th, during a period of baseflow conditions.

Table 3.48: Locations and sampling times of GRWQMN stations

Watershed	Site	Sample Frequency Dates
Lovekin Creek	LK-01-05	July 19, August 30, September 27, October 31, 2005
Lovekin Creek	LOV-01-06	June 13, 2006
Bouchette Point Creek	BO-01-05	July 19, August 30, September 27, October 31, 2005
Bouchette Point Creek	BOU-01-06	June 15, July 13, August 10, September 27, 2006
Bouchette Point Creek	BOU-02-06	June 15, July 13, August 10, September 27, 2006
Port Granby Creek	PG-01-05	July 19, August 30, September 27, October 31, 2005
Port Granby Creek	PG-02-05	July 19, August 30, September 27, October 31, 2005

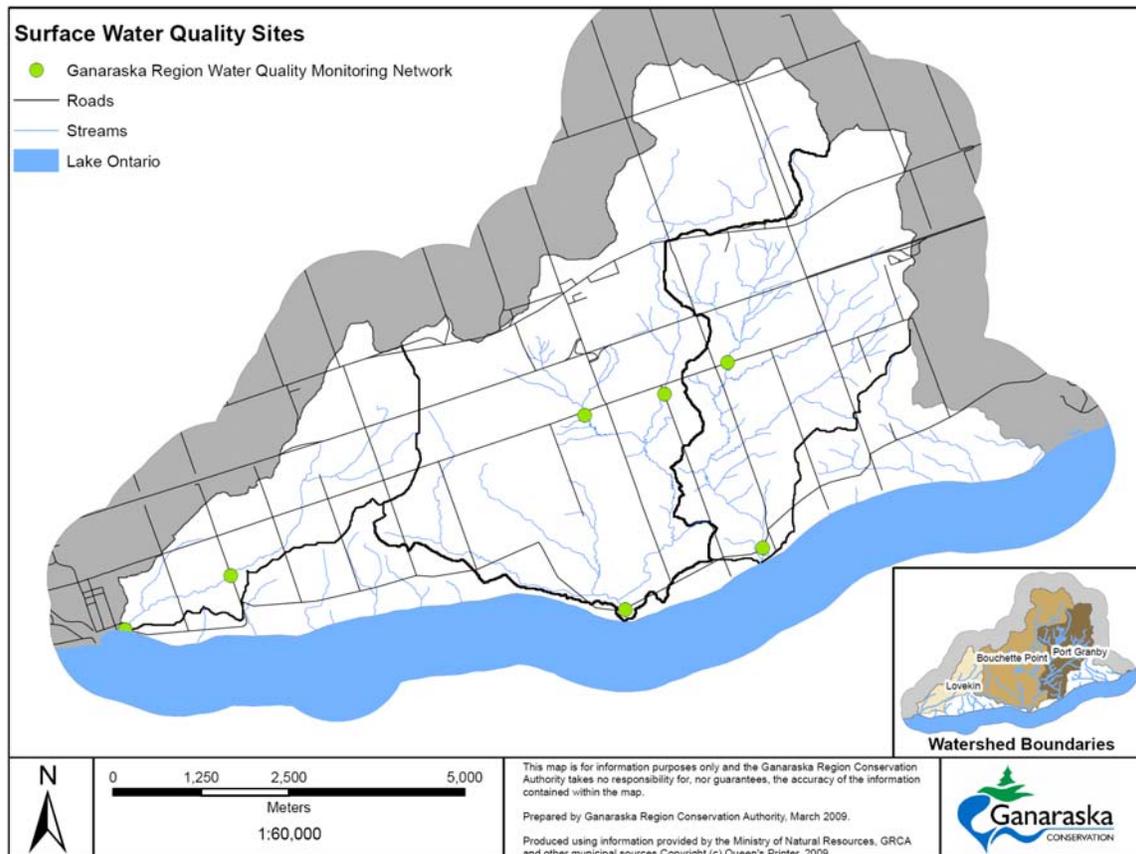


Figure 3.43: Ganaraska Region Water Quality Monitoring Network sites

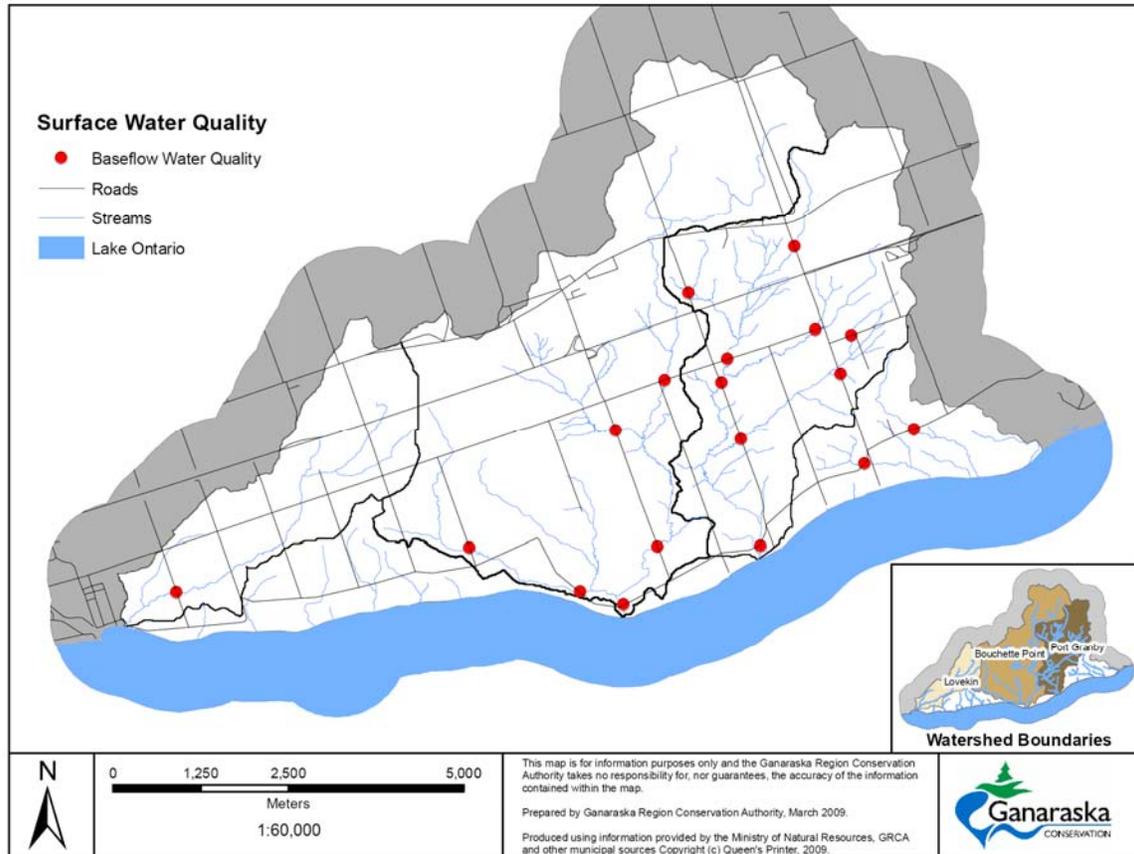


Figure 3.44: Baseflow water quality sites

Water Quality Sampling Methods

Since 2002 surface water quality sites have been monitored using a YSI™ 600QS model water quality probe. Parameters include temperature, salinity, pH, dissolved oxygen, total dissolved solids and conductivity.

For the GRWQMN program, surface water was analyzed for alkalinity, total suspended solids, nitrate, nitrite and chloride concentrations in-house using a HACH DR/2010 Portable Datalogging Spectrophotometer. The Spectrophotometer method used to analyze alkalinity was the sulphuric acid method with a digital titrator; total suspended solids were the photometric method, and nitrate was the calcium reduction method; nitrite was the diazotisation method (HACH Company 1989). Along with in-house analysis, samples were sent to SGS Lakefield Research Limited for analysis of total phosphorus, ammonia-ammonium, unionized ammonia, *Escherichia coli* and total coliform.

The baseflow water quality monitoring analysis was conducted by SGS Lakefield Research in 2009 for total phosphorus, nitrate, nitrite, total suspended solids, ammonia-ammonium, unionized ammonia, *Escherichia coli* and total coliform. Turbidity was sampled in the field with a HACH 2100P Turbidimetre.

Surface Water Quality Guidelines

Surface water quality guidelines were used to evaluate measured water quality parameters. Table 3.49 outlines the guidelines used and the source.

Table 3.49: Surface water quality guidelines or objectives

Parameter	Guideline or Objective
pH *	6.5-8.5
Total Suspended Solids ←	25 mg/L
Dissolved Oxygen*	5 to 8 mg/L (temperature dependant)
Nitrate-N †	2.9 mg/L
Nitrite-N †	0.197 mg/L
Unionized Ammonia*	0.02 mg/L
Total Phosphorus*	0.03 mg/L
<i>Escherichia coli</i> *	100 cfu/100 ml (recreation)
Chloride †	250 mg/L
Aluminum*	75 µg/L
Copper*	5 µg/L

* Ontario Ministry of Environment and Energy (1999)

† Canadian Council of Ministers of the Environment (2006)

← Department of Fisheries and Oceans Canada (2000)

Statistical Analysis

All statistical analysis was done using the computer statistical package Statistica using non-parametric tests.

- *GRWQMN Data Analysis*: basic descriptive statistics on the GRWQMN data were conducted and median values were calculated due to the non-parametric nature of the data. Geometric means were calculated for bacteria data. Analysis comparing dissolved oxygen to stream temperature is described using Spearman's Ranks Correlation.
- *Baseflow Water Quality Data Analysis*: basic descriptive statistics on the baseflow water quality data were conducted and median values were calculated due to the non-parametric nature of the data. Catchment areas contributing to each sample site were defined using Arc Hydro. Each catchment area was then evaluated for land use types with 2002 Ecological Land Classification data. These land use types were used to infer a relationship to the water quality parameters sampled at each site.

3.7.2 Ganaraska Region Water Quality Monitoring Network Results

The Ganaraska Region Water Quality Monitoring Network allows a watershed-wide analysis of water quality. Given the small data set of each GRWQMN station, all stations in each watershed will be grouped to give an overall picture of water quality.

Physical Parameters

The physical parameters of the surface water indicate the base conditions of water quality. Tables 3.50 to 3.52 describe the physical conditions of the surface water as sampled through the GRWQMN. All physical parameters are within acceptable ranges and concentrations are dependent on stream conditions such as flow and temperature.

Table 3.50: Range of physical parameters in Lovekin Creek

Variable	N*	Median	Minimum	Maximum
pH	5	8.07	7.21	11.67
Dissolved Oxygen (mg/L)	4	10.64	8.67	11.67
Conductivity ($\mu\text{s}/\text{cm}$)	5	768	558	840
Alkalinity (mg/L as CaCO_3)	5	230	148	276
TSS (mg/L)	5	8	0	50
Turbidity (mg/L)	5	2	0.5	12.7

* n = number of sites

Table 3.51: Range of physical parameters in Bouchette Point Creek

Variable	n	Median	Minimum	Maximum
pH	12	8.12	7.27	8.34
Dissolved Oxygen (mg/L)	12	10.30	8.34	14.32
Conductivity ($\mu\text{s}/\text{cm}$)	12	653	484	925
Alkalinity (mg/L as CaCO_3)	12	189	138	246
TSS (mg/L)	12	8.0	1.0	119
Turbidity (mg/L)	12	2.32	0.45	8.0

Table 3.52: Range of physical parameters in Port Granby Creek

Variable	n	Median	Minimum	Maximum
pH	8	8.31	8.15	8.36
Dissolved Oxygen (mg/L)	8	10.39	9.37	10.86
Conductivity ($\mu\text{s}/\text{cm}$)	8	799	446	846
Alkalinity (mg/L as CaCO_3)	8	228	204	243
TSS (mg/L)	8	3.5	0	21
Turbidity (mg/L)	8	3	0.5	6

Results show the following:

- Lovekin Creek experienced abnormally high pH levels and TSS on June 13, 2006
- All other pH levels are within the acceptable range of 6.5 to 8.5.
- Total suspended solids during sampling exceeded the recommended 25 mg/L only once (Lovekin Creek on June 13, 2006).
- The median TSS and turbidity concentration reflects the usual condition.
- Dissolved oxygen ranges during sampling are within acceptable ranges.

Chloride

Chloride was sampled during the late spring and summer months. Table 3.53 describes the chloride concentrations sampled through the GRWQMN, all of which are below the Canadian Environmental Quality guideline of 250 mg/L.

Table 3.53: Chloride concentrations

Watershed	n	Median (mg/L)	Minimum (mg/L)	Maximum (mg/L)
Lovekin Creek	4	14	11	26
Bouchette Point Creek	10	22	7	90
Port Granby Creek	8	31	22	60

Nutrients

Five nutrient parameters have been sampled through the GRWQMN and concentration ranges are found in Tables 3.54 to 3.56.

- Nitrite-N concentrations never exceeded the CWQG of 0.197 mg/L when sampled.
- Nitrate-N concentrations exceeded the CWQG of 2.9 mg/L once when sampled (Lovekin Creek, June 13, 2005).
- Ammonia-ammonium limits are dependent on stream temperature and unionized ammonia has a PWQO of 0.02 mg/L. Based on this objective unionized ammonia at sampled GRWQMN stations has exceeded the PWQO two out of four sampling times in Lovekin Creek, two out of 11 sampling times in Bouchette Point Creek, and two out of 6 sampling times in Port Granby Creek.
- Total phosphorus has also exceeded the PWQO of 0.03 mg/L 20% of the time (two sample events) in Lovekin Creek, 50% of the time (six sample events) at Bouchette Point Creek, and 13% of the time (one sample event) in Port Granby Creek.
- Unionized ammonia and total phosphorus median concentration are below the PWQO, except in Bouchette Point Creek (Tables 3.54 and 3.56).

Table 3.54: Nutrient concentrations in Lovekin Creek

Variable	n	Median	Minimum	Maximum	10th Percentile	90th Percentile
Nitrate-N (mg/L) (CWQG = 2.9 mg/L)	5	1.9	0.1	3.6	0.1	3.6
Nitrite-N (mg/L) (CWQG = 0.197 mg/L)	5	0.002	0.001	0.004	0.001	0.004
Ammonia-ammonium (mg/L)	5	0.02	0.005	0.2	0.005	0.2
Unionized Ammonia (mg/L) (PWQO = 0.02 mg/L)	4	0.012	0.005	0.03	0.02	0.03
Total Phosphorus (mg/L) (PWQO = 0.03 mg/L)	5	0.024	0.001	0.21	0.001	0.21

Table 3.55: Nutrient concentrations in Bouchette Point Creek

Variable	n	Median	Minimum	Maximum	10 th Percentile	90 th Percentile
Nitrate-N (mg/L)	12	0.70	0.40	1.5	0.6	1.4
Nitrite-N (mg/L)	12	0.004	0	0.007	0	0.006
Ammonia-ammonium (mg/L)	12	0.10	0.005	0.30	0.01	0.2
Unionized Ammonia (mg/L)	12	0.01	0.004	0.027	0.004	0.025
Total Phosphorus (mg/L)	12	0.033	0.001	0.32	0.009	0.05

Table 3.56: Nutrient concentrations in Port Granby Creek

Variable	n	Median	Minimum	Maximum	10 th Percentile	90 th Percentile
Nitrate-N (mg/L)	8	0.7	0.5	0.7	0.5	0.7
Nitrite-N (mg/L)	8	0.004	0.001	0.007	0.001	0.007
Ammonia-ammonium (mg/L)	8	0.025	0.005	0.13	0.005	0.13
Unionized Ammonia (mg/L)	6	0.007	0.005	0.025	0.005	0.025
Total Phosphorus (mg/L)	8	0.02	0.001	0.037	0.001	0.037

Bacteria

Escherichia coli frequently exceed the PWQO as sampled through the GRWQMN (Tables 3.57 to 3.59). Concentrations give an idea of bacteria concentrations. However samples are only taken once per site per sampling time and are not based on five samples per site. Therefore results must be generally interpreted. *Escherichia coli* exceed the PWQO 37% of the time throughout the entire three watersheds.

Table 3.57: Bacteria concentrations in Lovekin Creek

Variable	n	Geometric Mean	Minimum	Maximum
<i>Escherichia coli</i> (cfu/100 ml)(PWQO = 100 cfu/100 ml)	5	185	40	460
Total Coliform (cfu/100 ml)	5	4525	1900	7200

Table 3.58: Bacteria concentrations in Bouchette Point Creek

Variable	n	Geometric Mean	Minimum	Maximum
<i>Escherichia coli</i> (cfu/100 ml)	12	232	64	2060
Total Coliform (cfu/100 ml)	12	1683	460	7300

Table 3.59: Bacteria concentrations in Port Granby Creek

Variable	n	Geometric Mean	Minimum	Maximum
<i>Escherichia coli</i> (cfu/100 ml)	8	167	20	1440
Total Coliform (cfu/100 ml)	8	1780	100	5500

3.7.3 Baseflow Water Quality Monitoring Program Results

The Baseflow Water Quality Monitoring Program allows a watershed-wide analysis of water quality during baseflow conditions. Baseflow occurs during 70% of the year. Therefore, water quality is more likely to be a result of groundwater quality or very local land uses (e.g., point source contamination). By sampling

numerous sites, a detailed picture of areas that have uniform water quality can be seen, given that surface water runoff and precipitation inputs are controlled.

Physical Parameters

The physical parameters of the surface water suggest the background conditions of the quality of water. Table 3.60 and 3.61 describes the physical conditions of surface water as sampled through the Baseflow Water Quality Monitoring Program in Bouchette Point Creek and Port Granby Creek. Lovekin Creek was removed from the analysis as there was only one data point. All physical parameters are within acceptable ranges, with concentrations dependent on stream conditions such as flow and temperature. TSS exceeded the recommended 25 mg/L, 9% of the time; the median concentration of 4 mg/L reflects the usual condition.

Table 3.60: Range of physical parameters through the Baseflow Water Quality Monitoring Program in Bouchette Point Creek

	N	Median	Minimum	Maximum	10 th Percentile	90 th Percentile
Temperature (°C)	6	18.9	17.6	19.4	17.4	19.4
DO (mg/L)	6	8.5	7.1	9.8	7.1	9.8
Conductivity (us/cm)	6	615	579	796	579	796
Salinity (%)	6	0.30	0.28	0.39	0.37	0.52
pH	6	8.49	8.15	8.57	8.15	8.57
TDS (mg/L)	6	0.40	0.37	0.52	0.37	0.52
Turbidity (mg/L)	6	3	2	9	2	9
TSS (mg/L)	6	3	2	11	2	11

Table 3.61: Range of physical parameters through the Baseflow Water Quality Monitoring Program in Port Granby Creek

	N	Median	Minimum	Maximum	10 th Percentile	90 th Percentile
Temperature (°C)	9	15.2	13.9	16.6	13.9	16.6
DO (mg/L)	9	11.4	5.3	13.0	5.3	13.0
Conductivity (us/cm)	9	669	497	806	497	806
Salinity (%)	9	0.33	0.24	0.40	0.24	0.40
pH	9	7.85	7.40	8.09	7.40	8.09
TDS (mg/L)	9	0.44	0.32	0.52	0.32	0.52
Turbidity (mg/L)	9	5	2	36	2	36
TSS (mg/L)	9	6	2	39	2	39

Nutrients

Five nutrient parameters were sampled through the Baseflow Water Quality Monitoring Program and concentration ranges are found in Table 3.62 and 3.63 for Bouchette Point Creek and Port Granby Creek respectively.

- Nitrate–N exceeded the CWQG of 2.9 mg/L at 1 site in Port Granby Creek, (7% of the time).
- Nitrite–N never exceeded the CWQG of 0.197 mg/L.
- Unionized ammonia concentrations at sample sites were always below the PWQO.
- Total phosphorus exceeded the PWQO of 0.03 mg/L at 3 sites, or 20% of the time at sampled baseflow water quality monitoring stations.
- Nitrite-N, nitrate-N and total phosphorus median values were below the respective water quality guidelines.

Table 3.62: Nutrient concentrations sampled through the Baseflow Water Quality Monitoring Program in Bouchette Point Creek

	n	Median	Minimum	Maximum	10 th Percentile	90 th Percentile
Nitrite-N (mg/L)	6	0.06	0.06	0.06	0.06	0.06
Nitrate-N (mg/L)	6	1.5	0.7	2.56	0.7	2.56
Total Ammonia (mg/L)	6	0.04	0.04	0.14	0.04	0.14
Unionized Ammonia (mg/L)	6	0.005	0.005	0.01	0.005	0.01
Total Phosphorus (mg/L)	6	0.02	0.01	0.06	0.01	0.06

Table 3.63: Nutrient concentrations sampled through the Baseflow Water Quality Monitoring Program in Port Granby Creek

	n	Median	Minimum	Maximum	10 th Percentile	90 th Percentile
Nitrite-N (mg/L)	9	0.06	0.06	0.06	0.06	0.06
Nitrate-N (mg/L)	9	0.33	0.05	3.52	0.05	3.52
Total Ammonia (mg/L)	9	0.06	0.04	0.21	0.04	0.21
Unionized Ammonia (mg/L)	9	0.005	0.005	0.008	0.005	0.008
Total Phosphorus (mg/L)	9	0.02	0.01	0.57	0.01	0.57

Bacteria

Ranges of *Escherichia coli* frequently exceed the PWQO as sampled through the Baseflow Water Quality Monitoring Program. Sample concentrations give an idea of bacteria concentrations, however samples were only taken once per site and are not based on five samples per site. Therefore, results must be generally interpreted. *Escherichia coli* exceed the PWQO in Bouchette Point Creek at three sites, or 50% of the time. Total coliform concentrations ranged between 160 and 4800 counts/100 ml. *Escherichia coli* exceed the PWQO in Port Granby Creek at six sites, or 67% of the time. Total coliform concentrations ranged between 360 and 1020 counts/100 ml.

Effects of Land Use on Baseflow Water Quality Monitoring Water Quality

Catchment areas were delineated for each sample point using Arc Hydro to determine land uses within the drainage areas above the sample sites. Of the 16

sample sites, seven sites were dominated by natural areas (forests, meadows, thickets, wetlands, open areas and open water), and nine sites were dominated by agricultural land use (intensive and non-intensive agriculture). Catchments that were dominated by agriculture had concentrations of *Escherichia coli* (four sites), total phosphorus (two sites) and nitrate (one site) above the PWQO or CEQG. Natural area dominated catchments had concentrations of *Escherichia coli* (six sites) and total phosphorus (one site) were above the PWQO.

Although this coarse analysis of land use relationships to water quality provides an indication that land uses associated with human disturbances (e.g., agriculture) can cause increases in bacteria and nutrients, the same is seen with land uses associated with natural areas. It must be noted that at three sites where catchments were dominated by agricultural land use, no exceedances in water quality parameters, such as bacteria and nutrients, occurred. It appears there is a possible relationship between water quality and local land use activities, however further investigation into causes of higher concentrations of bacteria and nutrients needs to occur.

3.7.4 Discussion of Surface Water Quality

Physical Parameters

The background conditions of surface water quality are within acceptable ranges as described by *Provincial Water Quality Objectives*. The pH values at sample sites are within acceptable ranges indicating that there are no problems in regards to acidity or neutralizing. Alkalinity concentrations indicate that the three watersheds have the ability to buffer acidic changes that might occur. Alkalinity ranges from 24 to 500 mg/L as CaCO₃ throughout Canada (Canadian Council of Resource and Environment Ministers 1987), a range in which local water quality falls.

Quantifying dissolved and suspended solids can be done using conductivity, total suspended solids, and turbidity. In all cases, these parameters at sample sites were within acceptable ranges, and higher concentrations of particulates and suspended solids can be attributed to higher flows.

Dissolved oxygen concentrations at sample sites are also within acceptable ranges as related to *Provincial Water Quality Objectives*; indicating that in-stream nutrient cycling is not causing declines in oxygen levels. Dissolved oxygen as sampled through the GRWQMN has been shown to decline as stream temperatures increase, however rarely does it decline below acceptable concentrations.

Physical parameters indicate that surface water quality can be resilient to anthropogenic actions related to acidification, eutrophication and chemical additions. Certain metal parameters have reduced toxicity effects in higher pH, in harder water, or in water that has a high buffering capacity. Therefore the

Lovekin Creek, Bouchette Point Creek and Port Granby Creek surface waters has the appropriate physical background to mitigate some negative effects caused by human actions.

Chloride

Chloride is the principal component of road salts, and is the main contributing anion to salinity in surface water (Mayer et al. 1999). Road salts such as sodium chloride can affect the environment in different ways. Salts can affect the taste of drinking water, damage salt-sensitive vegetation, increase hardness and pH in soils, and increase wildlife death from vehicle collisions since they are attracted to the salts near roads (Transportation Association of Canada 1999). Once in water, chloride can be toxic (acute and chronic) to aquatic organisms depending on the concentration the organism is subjected to and the stage of an organism's life. Chloride was sampled during late spring and summer throughout the three watersheds, and concentrations were well below the federal guideline of 250 mg/L.

Nutrients

Total phosphorus exceeds the PWQO more often than any other nutrient. One of five samples exceeded the PWQO in Lovekin Creek, 50% of the samples exceeded the PWQO in Bouchette Point Creek and one of eight samples exceeded the PWQO in Port Granby Creek. Unionized ammonia has been greater than the PWQO of 0.02 mg/L as sampled through the GRWQMN. One of four samples exceeded the PWQO in Lovekin Creek, two of eleven samples exceeded the PWQO in Bouchette Point Creek and two of six samples exceeded the PWQO in Port Granby Creek.

Nitrite-N has exceeded the CWQG through the GRWQMN, and nitrate-N exceeded one time in Lovekin Creek. Nutrients therefore can be considered the water quality parameter most capable of fluctuating beyond recommended guidelines; however exceedances may be related to high runoff due to storm events or land use.

Phosphorus entering surface water is also a reflection of land management practices. The concentration of phosphorus in runoff is related to the amount of phosphorus in the surface layer of soil (0 to 5 cm), which reacts with rainfall runoff (Sharpley et al. 1996). Phosphorus runoff is also dependent on soil types, the amount of vegetative cover (Section 4.0.5), and whether or not manure or fertilizer was incorporated or how soon before a rainfall event that manure or fertilizer was applied (Sharpley et al. 1996).

Aquatic systems can benefit from phosphorus, which makes a system productive. Addition of phosphorus can also cause changes in a system by increasing plant and algal growth, which in turn alters the number and types of plants and animals, increase animal growth and size, increase turbidity, creates

more organic matter, and result in losses of oxygen. Phosphorus can be directly toxic to aquatic organisms, but this is very rare (Environment Canada 2005; Carpenter et al. 1998). Indirect effects are a greater concern and occur when increases in the amount of decaying organic material cause declines in oxygen due to an increase in oxygen use by decomposers.

Nitrogen is converted to many forms in the environment. Ammonia changes to nitrite, which changes to nitrate (Csuros 1994). Nitrate is the most stable form of nitrogen in an aquatic system and therefore is a good indicator of nitrogen and its forms in surface water. Nitrate affects aquatic organisms both indirectly and directly. Similar to phosphorus, nitrates in excess can increase growth of plants and algae, which may result in indirect toxic effects such as reduced oxygen levels. Aquatic invertebrates and fish exposed to high levels of nitrate may be smaller, slower to mature, or have lower reproductive success. Under very extreme concentrations, aquatic invertebrates and fish may die (Environment Canada 2005b).

Proper management of nutrients will help to reduce high concentrations entering surface water during high flows or storm events, and through direct methods such as storm drains and field tile drains. Carpenter et al. (1998) reported that more than 90% of phosphorus entering a water body comes from less than 10% of the land area during a few large storms. Methods to reduce the amount of nutrients entering surface water are to increase riparian vegetation to reduce surface runoff (Section 4.0.5), and to mitigate stormwater directly entering surface water through drains in both urban and rural areas.

Bacteria

Escherichia coli exceed the recreational PWQO frequently throughout Lovekin Creek, Bouchette Point Creek and Port Granby Creek. The presence of *Escherichia coli* in surface water indicates that fecal material of humans or other warm-blooded animals is present in the water. Common sources of *Escherichia coli* include municipal wastewater spills, septic leachate, agricultural or storm runoff, wildlife populations, or non-point sources of human or animal waste (An et al. 2002). Total coliform includes all coliform species (*Escherichia coli* and its variants). Sources of total coliform are the same as *Escherichia coli*, however are not necessarily from fecal matter, but also plant and organic material.

Fecal coliforms are bacteria, which are single-celled living organisms. These bacteria can decay under certain environmental conditions. The rate of die-off increases with different factors such as increasing temperature, elevated pH, high dissolved oxygen levels, solar radiation, and predaceous microorganisms such as protozoa (An et al. 2002). Fecal coliforms such as *Escherichia coli* are known to cause negative health effects in humans, and therefore an associated Drinking Water Quality Objective of 0 cfu/100 ml is in place in the Province of Ontario (Ontario Ministry of the Environment 2003) and a recreational guide line of 100 cfu/100 ml.

Direct effects of coliforms and *Escherichia coli* on aquatic species are poorly understood and researched. The United States Environmental Protection Agency sets fecal coliform concentration criteria for shellfish harvesting. Although shellfish are not affected by fecal coliform, humans consuming shellfish exposed to fecal coliform can become ill (United States Environmental Protection Agency 1976). Although the direct effect of fecal coliform on aquatic organisms is uncertain, the proper management of sources of fecal coliforms needs to be addressed. In addition, surface water that serves as sources of drinking water for human or livestock consumption needs to be protected from coliform contamination.



Chapter 4 - Biotic Features

4.0 AQUATIC RESOURCES

Aquatic resources include in-stream habitat and the aquatic organisms that rely on aquatic habitats, and riparian areas. The forms and functions of these resources are influenced by the quality and quantity of water systems and the contributing watershed areas.

4.0.1 Fisheries

Fishes are one of Ontario's most valued natural resources from an ecological, biological, economic, social, and cultural perspective. Protecting and restoring the aquatic ecosystem results in a healthy fishery and environment. The three watersheds have a limited fishery given the proximity to Wilmot Creek and the Ganaraska River, and the lack of public lands for easy angling access. The three watersheds however host a salmonid spawning run from the Lake Ontario basin.

Fisheries Analysis

An Index of Biotic Integrity (IBI) is a tool that measures fish community associations and is used to identify the general health of the broader stream ecosystem (Steedman 1986). IBI is determined through ten measures of fish community composition, grouped into four general categories: species richness, local indicator species, trophic composition and fish abundance. Scoring is based on a scale from ten (poor) to 50 (very good).

Fisheries data sets consisted of sites from multiple projects in the regional study area from 1974 to 2008. Project methods varied within this time period, so not all data could be used for all analysis. Only 2005 and 2007 data was utilized for IBI calculations, while all data with density and biomass were used for those purposes. All other data in conjunction with the above data was utilized to gain an understanding of species distributions, or presence/absence in the regional study area.

Density (fish/m²) and biomass (grams/m²) were calculated for all species sampled using electrofishing. Site area was calculated by multiplying the site length (m) by the average site width (m).

Fisheries Results

A total of 20 species of fish have been sampled in the regional study area (Table 4.0). Of these, two (10%) of the species are not native to the Lake Ontario basin. Stream quality based on Steedman's IBI (Figure 4.0) showed six sites being good (50%), six fair (50%), and zero excellent or poor sites.

Table 4.0: Fish species present

Species	Scientific Name	Lovekin Creek watershed	Bouchette Point Creek watershed	Port Granby Creek watershed
Bluntnose Minnow	<i>Pimephales notatus</i>		√	√
Brook Stickleback	<i>Culaea inconstans</i>	√	√	√
Brook Trout	<i>Salvelinus fontinalis</i>			√
Brown bullhead	<i>Ameiurus nebulosus</i>		√	
Brown Trout*	<i>Salmo trutta</i>	√	√	
Common Shiner	<i>Luxilus cornutus</i>		√	√
Creek Chub	<i>Semotilus atromaculatus</i>	√	√	√
Eastern Blacknose Dace	<i>Rhinichthys atratulus</i>	√	√	√
Fathead Minnow	<i>Pimephales promelas</i>	√	√	√
Finescale Dace	<i>Phoxinus neogaeus</i>		√	
Iowa Darter	<i>Etheostoma exile</i>			√
Johnny Darter	<i>Etheostoma nigrum</i>	√	√	√
Largemouth Bass	<i>Micropterus salmoides</i>	√	√	
Longnose Dace	<i>Rhinichthys cataractae</i>	√	√	√
Mottled Sculpin	<i>Cottus bairdii</i>			√
Northern Redbelly Dace	<i>Phoxinus eos</i>		√	
Pumpkinseed	<i>Lepomis gibbosus</i>	√	√	
Rainbow Trout *	<i>Oncorhynchus mykiss</i>	√	√	√
Smallmouth Bass	<i>Micropterus dolomieu</i>	√		
White Sucker	<i>Catostomus commersonii</i>	√	√	√

* non-native species

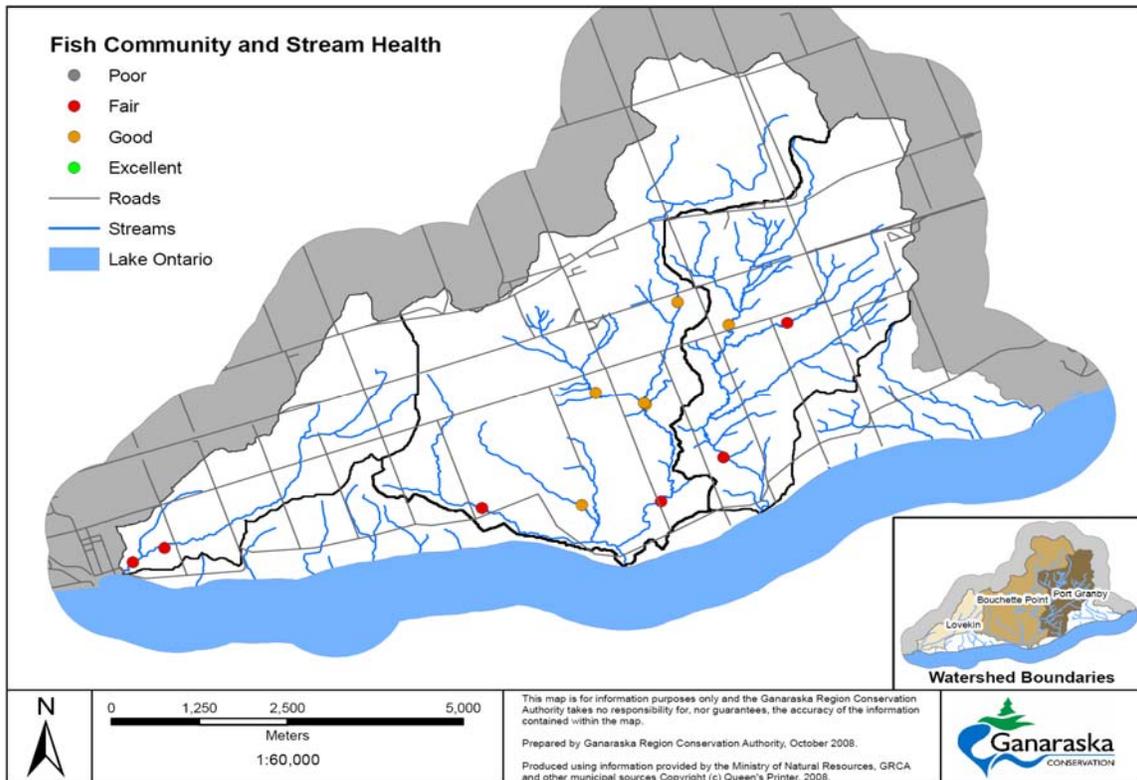


Figure 4.0: Stream quality based on Steedman's Index of Biotic Integrity

Rainbow Trout (Oncorhynchus mykiss)

Rainbow Trout were sampled at 5 electrofishing stations (39%) (Figure 4.1). Density ranged from 0.01 to 0.15 fish/m² and biomass ranged from 0.02 to 0.76 g/m² at these locations. The highest density and biomass was found in Bouchette Point Creek.

Brook Trout (Salvelinus fontinalis)

Brook Trout were only sampled at one electrofishing station on Port Granby Creek (8%) (Figure 4.2). Density was 0.07 fish/m² and biomass was 3.32 g/m² at this location.

Eastern Blacknose Dace (Rhinichthys atratulus)

Eastern Blacknose Dace were sampled at 12 electrofishing stations (92%) (Figure 4.3). Density ranged from 0.06 to 2.13 fish/m² and biomass ranged from 0.09 to 3.89 g/m² at these locations.

Longnose Dace (Rhinichthys cataractae)

Longnose Dace were sampled at 3 electrofishing stations (23%) (Figure 4.4). Density ranged from 0.03 to 0.18 fish/m² and biomass ranged from 0.06 to 0.31 g/m² at these locations.

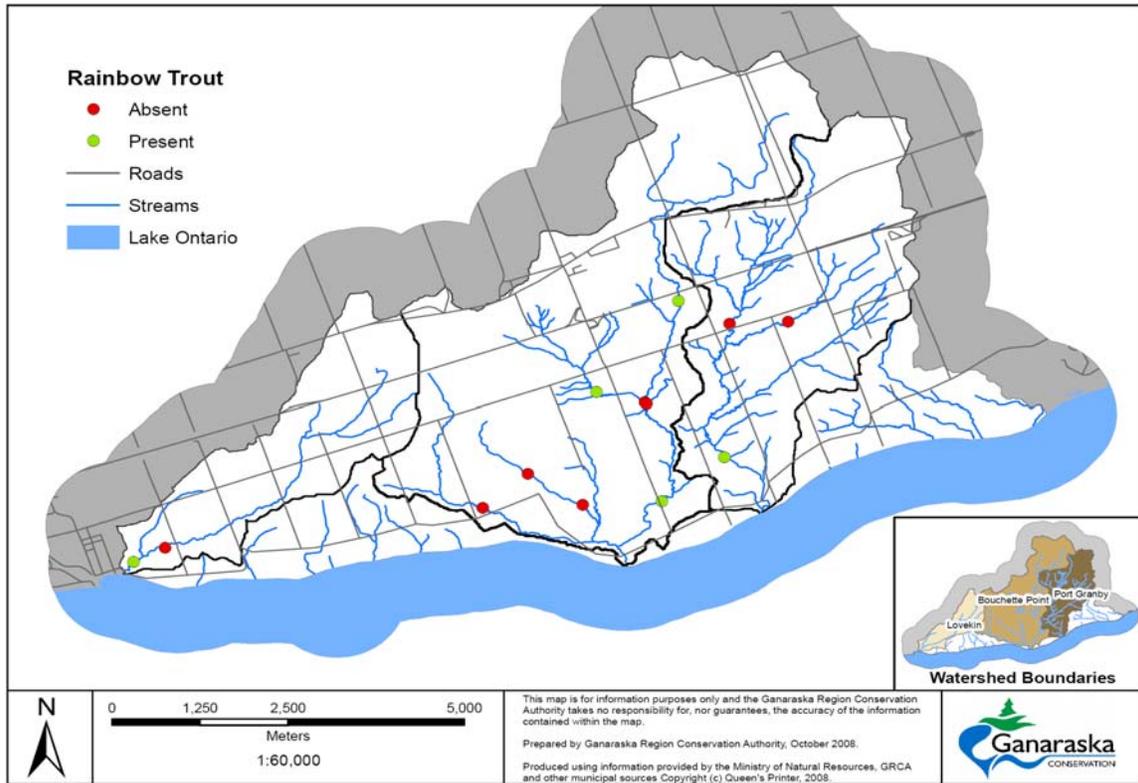


Figure 4.1: Juvenile Rainbow Trout summer presence/absence

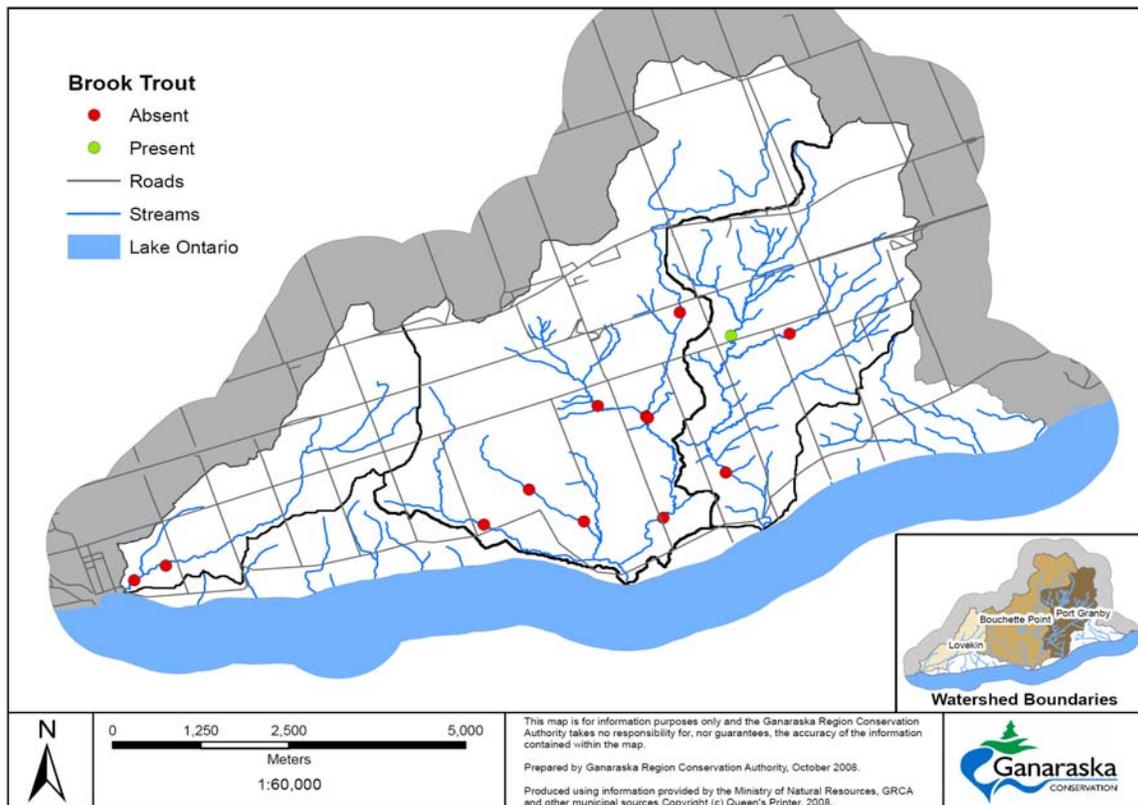


Figure 4.2: Brook Trout summer presence/absence

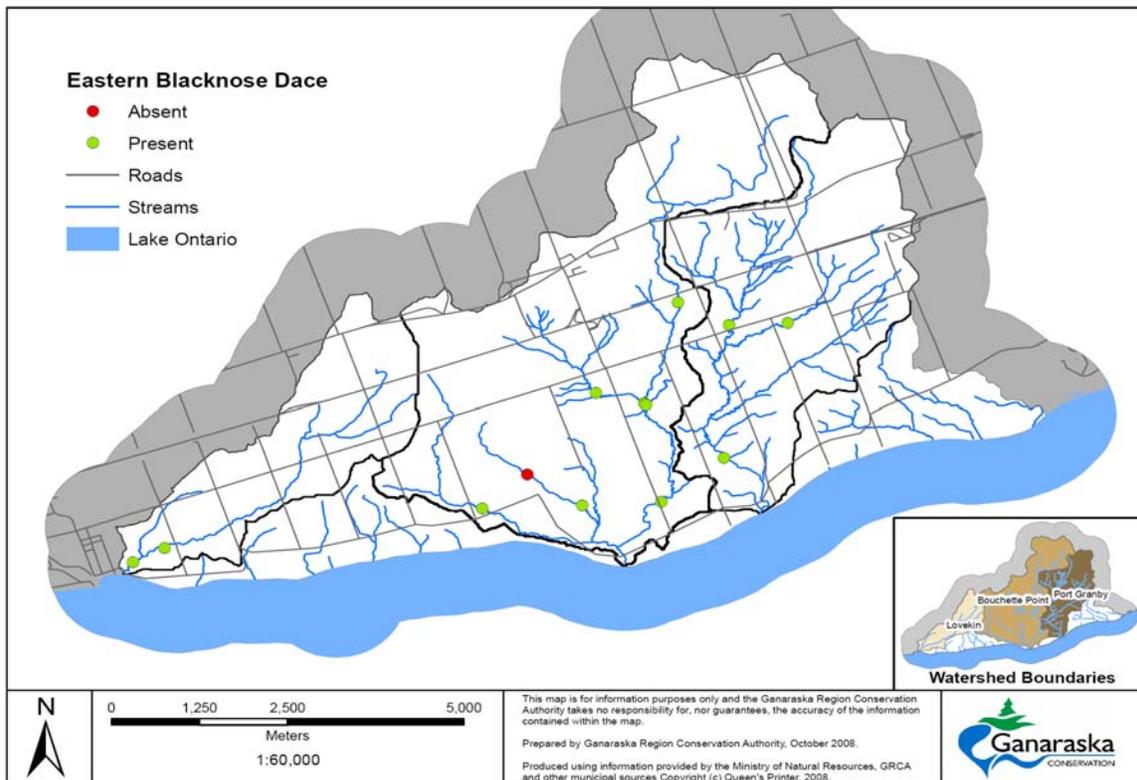


Figure 4.3: Eastern Blacknose Dace summer presence/absence

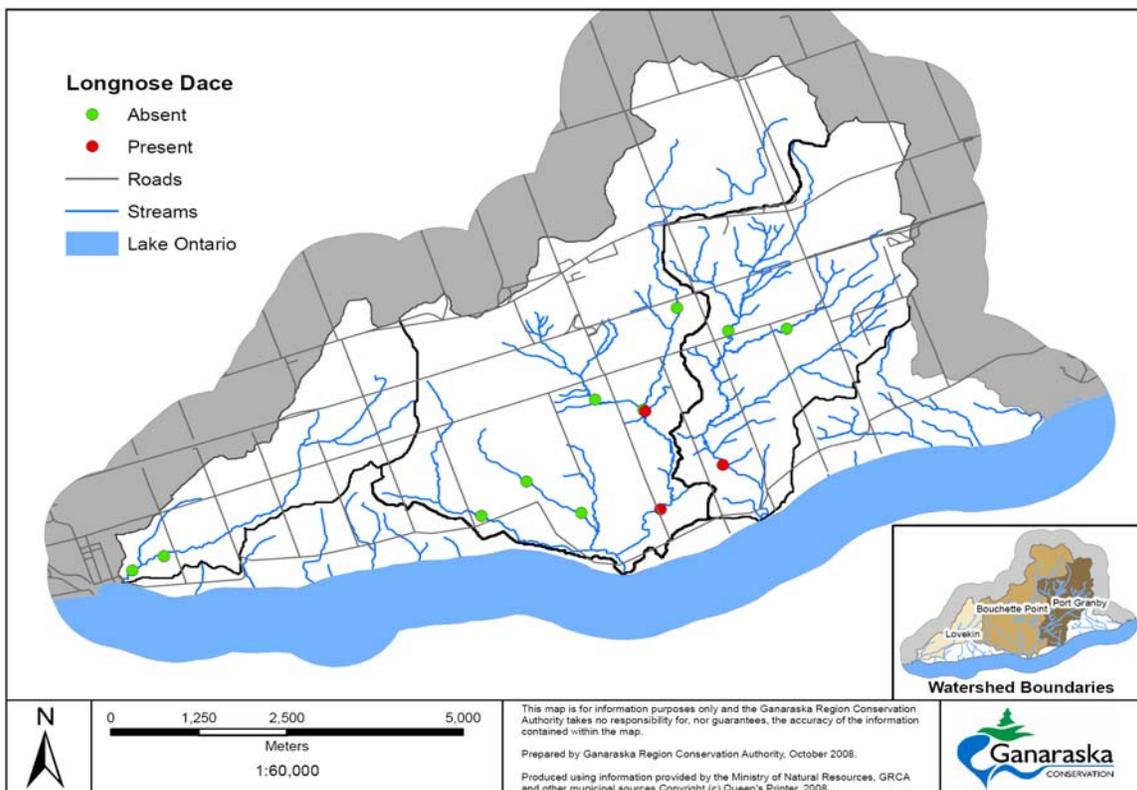


Figure 4.4: Longnose Dace summer presence/absence

Mottled Sculpin (Cottus bairdii)

Mottled Sculpin were only sampled at one electrofishing station on Port Granby Creek (8%) (Figure 4.5). Density was 0.08 fish/m² and biomass was 0.17 g/m² at this location. Historic Ministry of Natural Resource data for Port Granby Creek show two sites where Mottled Sculpin were captured.

White Sucker (Catostomus commersonii)

White Sucker were sampled at nine electrofishing stations (69%) (Figure 4.6). Density ranged from 0.004 to 0.40 fish/m² and biomass ranged from 0.02 to 0.70 g/m² at these locations.

Johnny Darter (Etheostoma nigrum)

Johnny Darter were sampled at six electrofishing stations (46%) (Figure 4.7). Density ranged from 0.02 to 1.29 fish/m² and biomass ranged from 0.03 to 0.57 g/m² at these locations.

Creek Chub (Semotilus atromaculatus)

Creek Chub were sampled at 12 electrofishing stations (92%) (Figure 4.8). Density ranged from 0.009 to 1.78 fish/m² and biomass ranged from 0.02 to 8.56 g/m² at these locations.

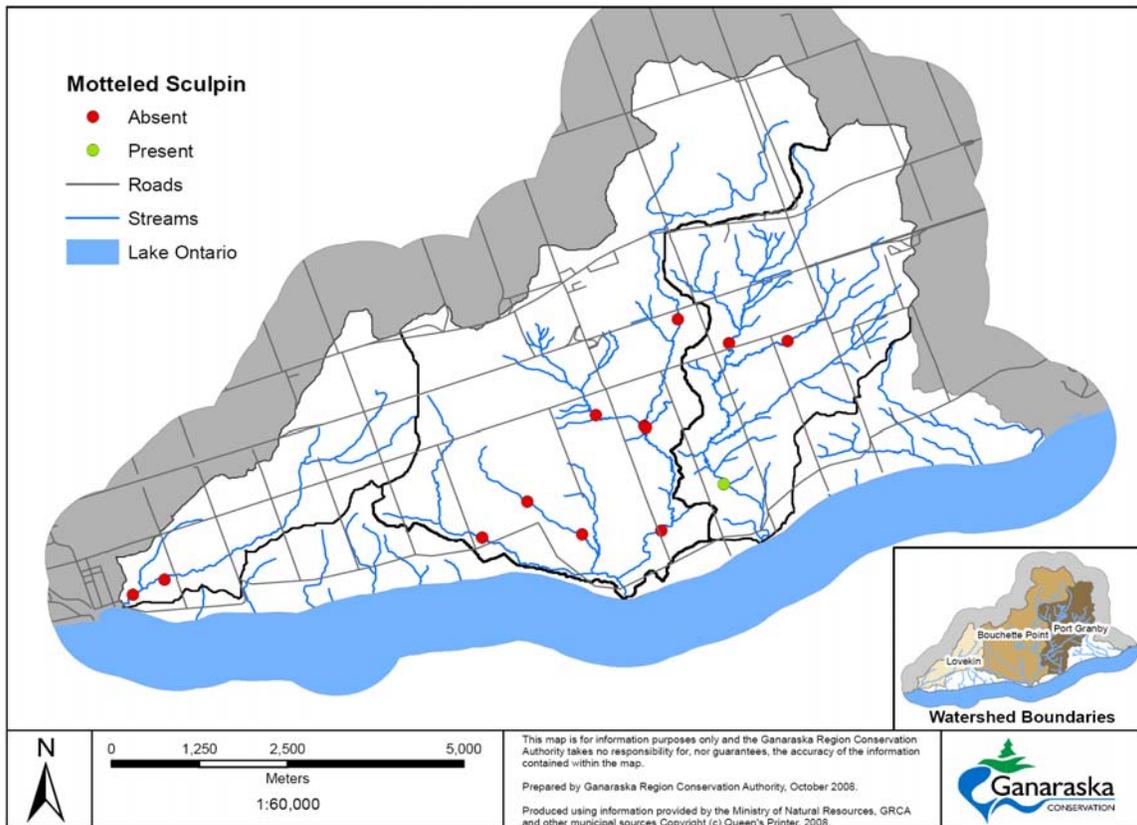


Figure 4.5: Mottled Sculpin summer presence/absence

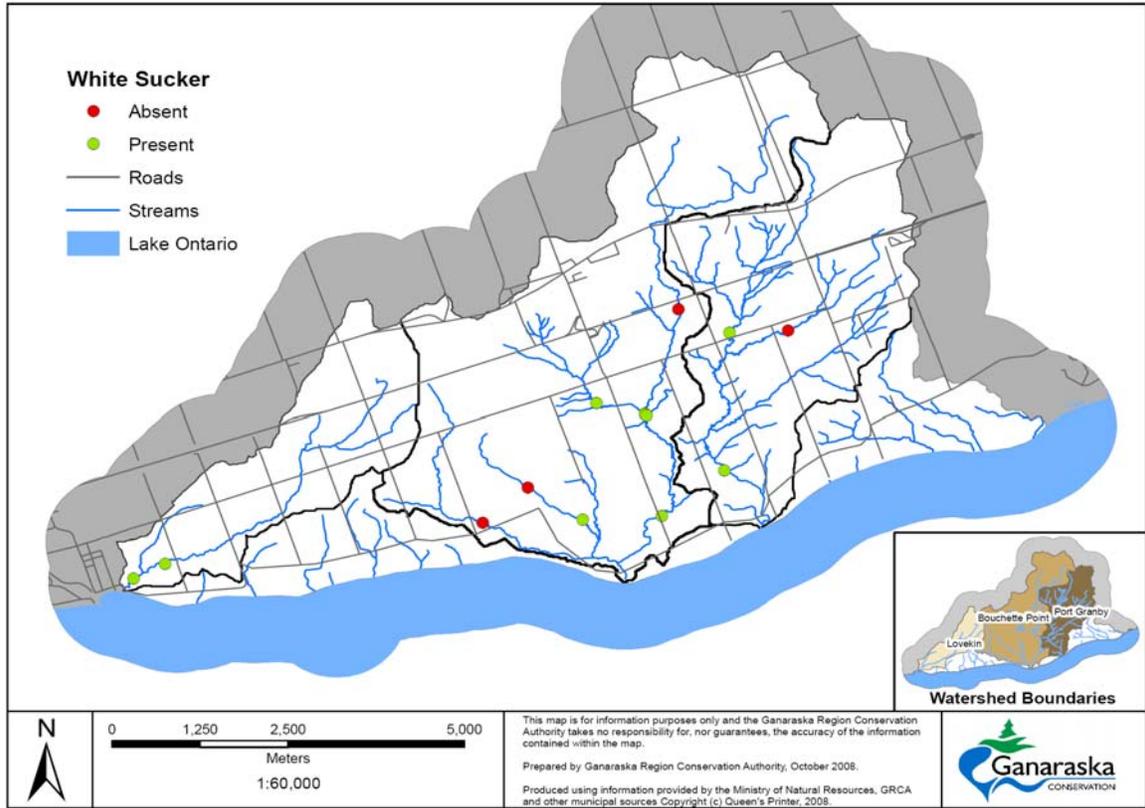


Figure 4.6: White Sucker summer presence/absence

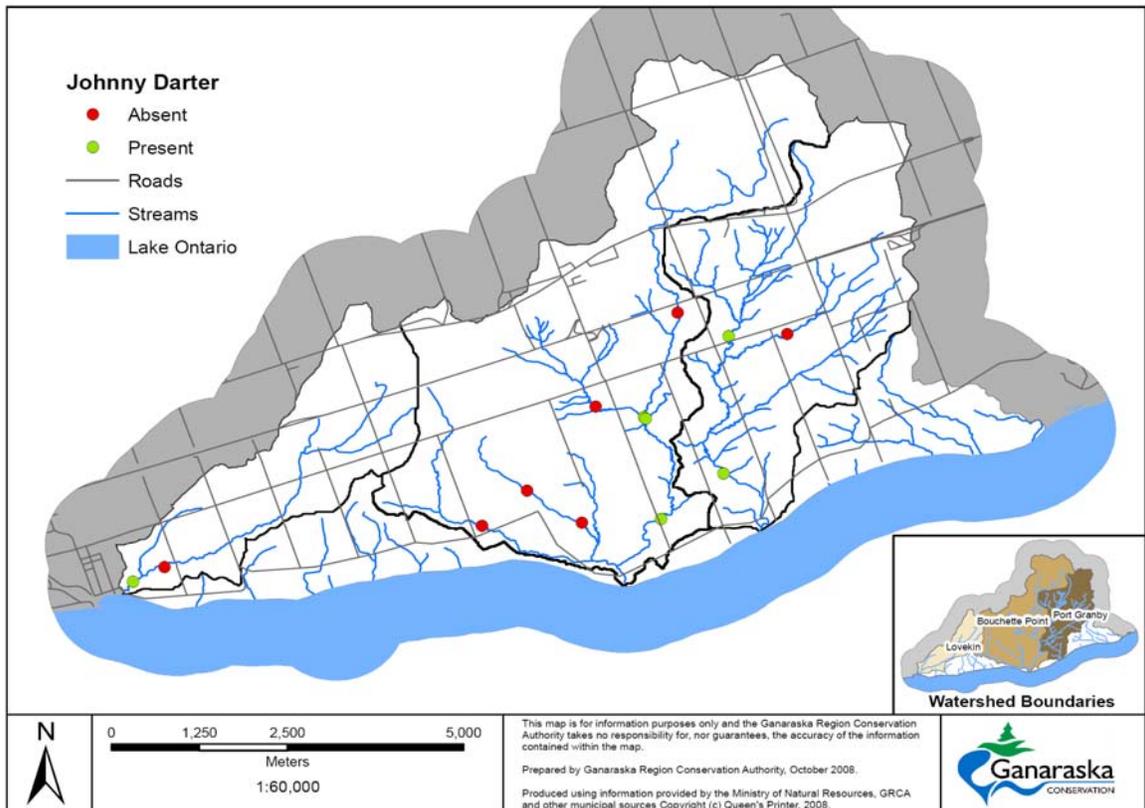


Figure 4.7: Johnny Darter summer presence/absence

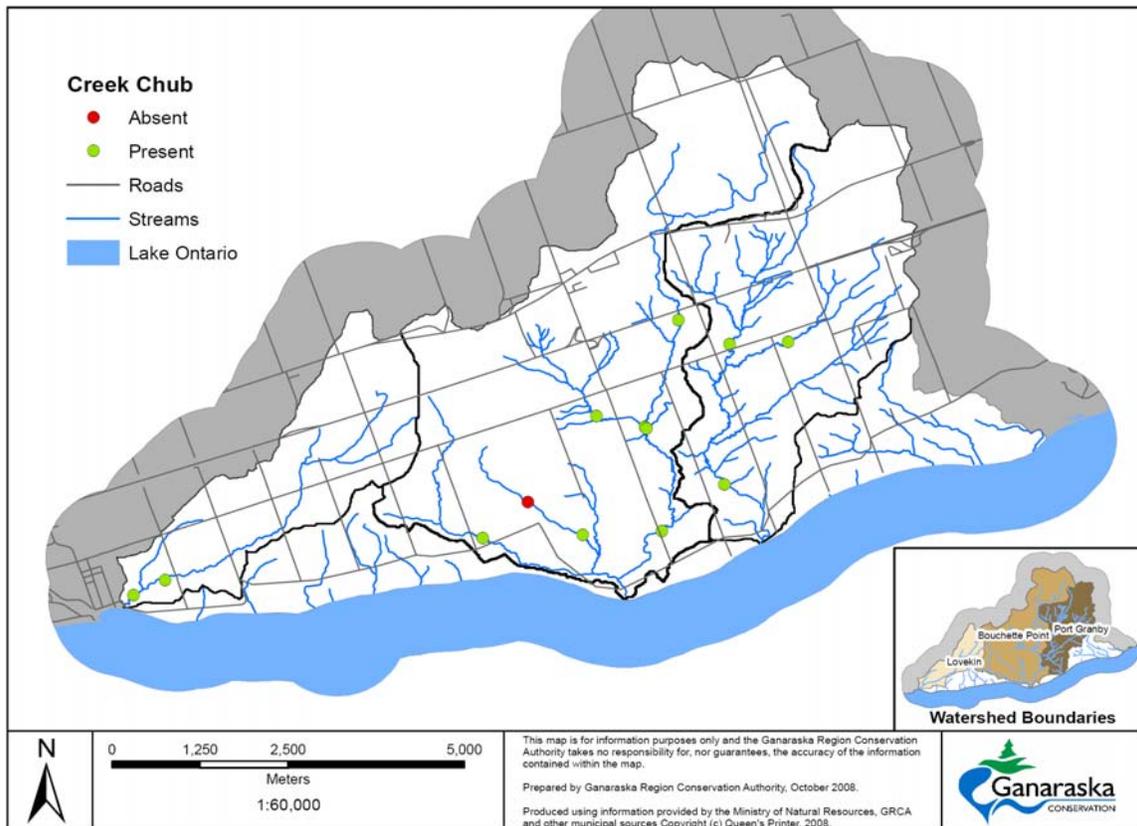


Figure 4.8: Creek Chub summer presence/absence

4.0.2 In-stream Habitat

A stream's ability to support a diverse and sustainable aquatic community depends on the in-stream habitat characteristics that include stream temperature, dissolved oxygen, food types, cover, stream bottom type and spawning areas (Cushing and Allan 2001). Stream temperature needs to be stable and within a range necessary for specific species' health and survival. Dissolved oxygen within streams is usually abundant, however concentrations vary in relation to temperature, water aeration (e.g., water flowing over rocks), primary production and water quality (Cushing and Allan 2001). Food sources of aquatic species include vegetation (e.g., periphyton), particulate organic matter, aquatic macroinvertebrates, fish and terrestrial organisms. A range of food types needs to be present in a stream to support a dynamic food web. These in-stream habitat requirements are discussed in further detail in Section 4.0.3 (stream temperature), 3.7 (dissolved oxygen) and 4.0.4 (benthic macroinvertebrates) of this document.

Cover in a stream is vital to aquatic organism survival. Cover consists of riparian vegetation, boulders, overhanging banks, logs, root wads and shade from overhanging objects (Cushing and Allan 2001). In-stream cover primarily provides shelter from predators and strong currents. Streams that support trout

and salmon have a range of stream morphologies ranging from cascade (8 to 30% slope) to dune-ripple regime (<0.1% slope). Typically local streams with a step-pool (4 to 8% slope) or pool-riffle (0.1 to 2% slope) are the most productive. Stream reaches of >4% slope are generally not utilized by salmon for spawning because of the reaches' high bed load transport rate, deep scour, and coarse substrate (Roni et al. 1999). Desired stream bottom composition for trout and salmon life cycles (e.g., spawning bed) includes a combination of large rocks, rubble, gravel and smaller amounts of sand. Other cover and substrate compositions are required for many different aquatic organisms.

The Ontario Stream Assessment Protocol (OSAP) was utilized to collect substrate particle sizes using the Channel Morphology method. The variable "particle size" was grouped into three categories; fines (<2 mm), gravel (2 mm-100 mm), and cobble (>100 mm). A total of four sites were analyzed (Figure 4.9) to determine the dominant substrate type and use this as a proxy for other stream habitat variables such as amount of cover as pools, riffles and glides.

The highest site percentages of fines were located in the Bouchette Point Creek watershed, while the Lovekin Creek watershed was dominated by gravel and cobble substrates (Figure 4.10, Figure 4.11). There was not any substrate data for Port Granby Creek watershed.

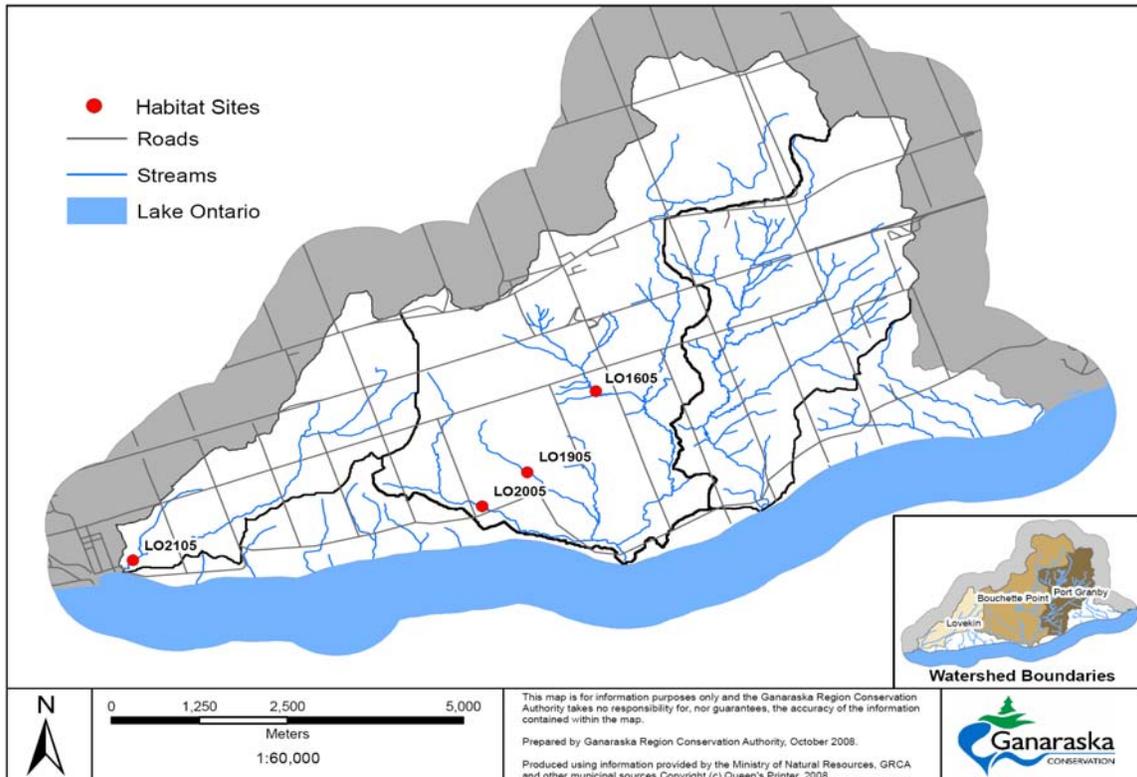


Figure 4.9: Stream habitat sampling sites

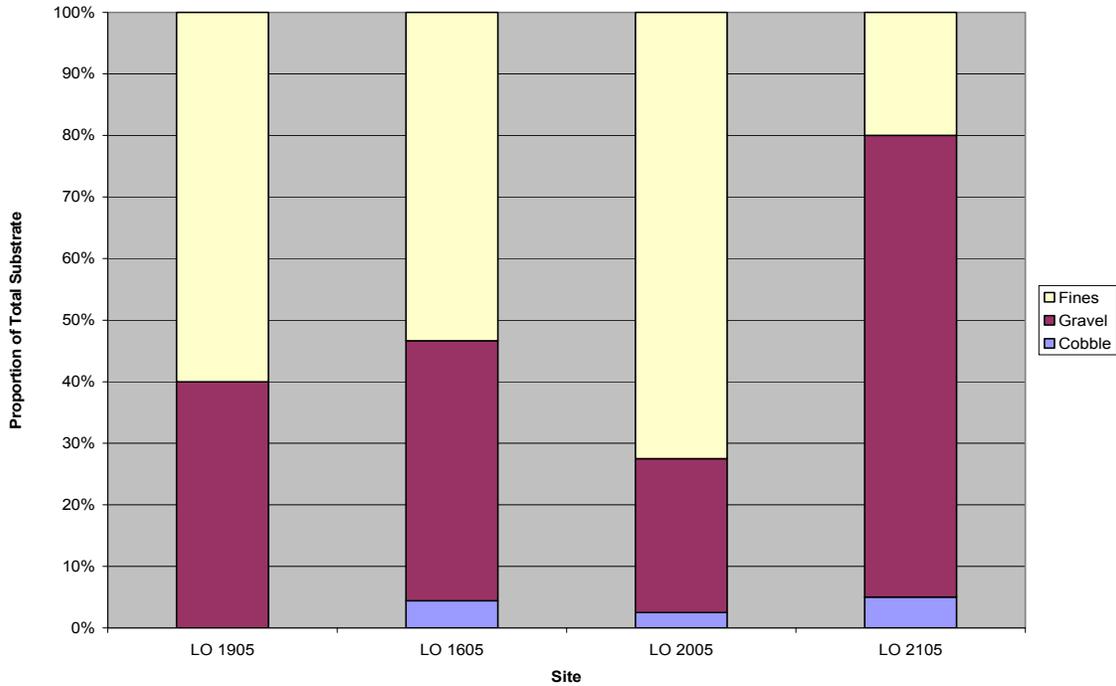


Figure 4.10: Substrate composition

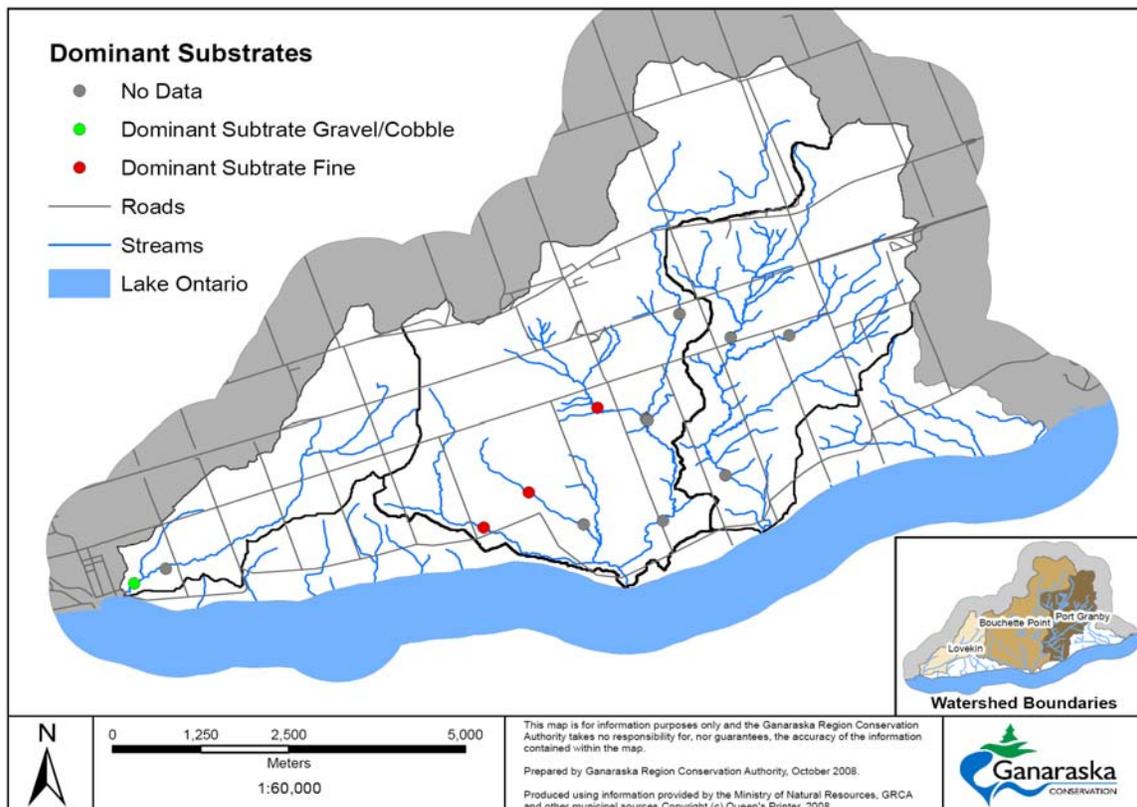


Figure 4.11: Dominate substrates (D_{50})

4.0.3 Surface Water Temperature

Surface water temperature is spatially and temporally variable and is influenced by air temperature, precipitation, stream flow, geology, topography, land use, watershed vegetation, channel and floodplain morphology, and riparian vegetation (Poole and Berman 2001). Out of all these controlling factors a strong linear relationship often exists between air temperature and river water temperature (Wetzel 2001), with a time lag by the water temperature to reflect air temperature (Stoneman and Jones 1996). As a result, air temperature is commonly used to help characterize stream temperature.

In addition to air temperature, groundwater inputs into surface water are also a dominant controlling factor of stream temperature (Power et al. 1999). Areas of groundwater discharge to a stream cause stream temperatures to be cooler than areas that do not experience discharge. Groundwater discharge areas provide places of refuge from warm temperatures, and coldwater fish tend to take advantage of these locations (Power et al. 1999). Water temperature and the presence or absence of groundwater discharge into a stream is important factors in determining the presence or absence of fish species in a particular area of the stream (Power et al. 1999). For example, Brook Trout are generally found in the coldest reaches of a stream and utilize groundwater inputs for spawning.

As described above, stream temperature dictates the types of biota that are found in a particular reach or area of the stream. Coldwater fish species require a stream temperature below 19°C, cool water fish species between 19°C and 25°C and warm water species above 25°C. However, different life stages often require different temperatures. Although fish species can tolerate stream temperatures outside of their required range, the longer the stream temperature remains in an extreme stage, the more stress is applied to the individual fish or a particular fish species (Cushing and Allan 2001).

Water temperature was collected from June to August 2005 using digital data recording thermometers. The average temperature during this period was utilized to determine the stream thermal classifications. One site on Lovekin Creek was classified as cool water, one site on Bouchette Point Creek was classified as coldwater, and two sites on Port Granby Creek are classified as coldwater based on Bowlby (2003 - unpublished). Overall, three site (75%) were classified as coldwater, while one (25%) was classified as cool water. Figure 4.12 shows the sample locations and summer thermal regimes.

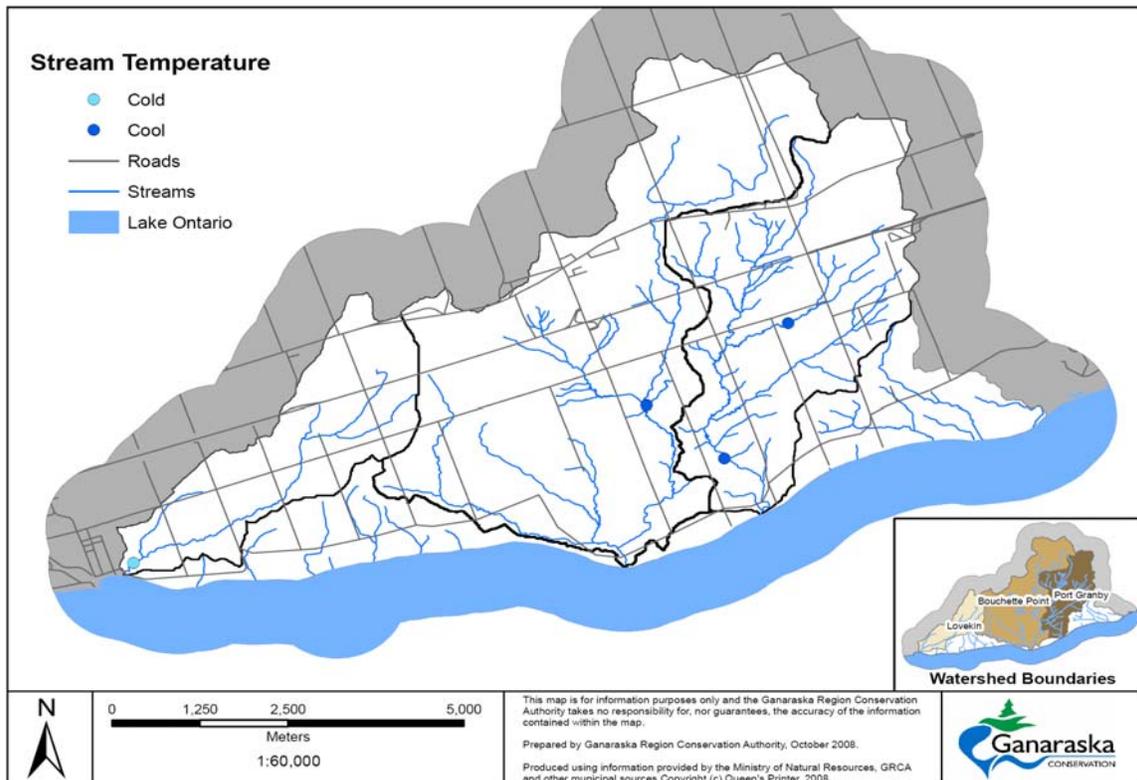


Figure 4.12: Summer water temperature

Another explanation for sites experiencing differing water temperatures is the effect of shading from the riparian area. Solar radiation accessing a stream is a major variable associated with summertime stream heating (Teti 1998). Where solar radiation has access to surface water, stream temperatures will rise accordingly. If groundwater discharge is not present in those same reaches that experience solar radiation, stream water will rise as a result of heat input and no cooler water inputs from groundwater contributions. This is why riparian vegetation is an important component to reducing the variability in stream temperature changes.

Channel structure and riparian areas can play a role in providing shade to stream. Narrow channels can be shaded more easily by stream banks (Moore et al. 2005) and tree shading can help minimize temperature variability in streams. Conversely, wide channels tend to be less shaded because they have a canopy gap over the stream (Moore et al. 2005). Stream channel morphology also contributes to the temperature regime of a stream. The channel morphology may promote hyporheic (surface and groundwater interface) water flow. As warm stream water moves through the hyporheic zone, it dissipates heat, mixes with colder groundwater, and may return to the stream cooler than the stream water it returns to.


4.0.4 Benthic Macroinvertebrates

Benthic macroinvertebrates represent aquatic organisms that are visible to the naked eye and live on the bottom of a water body or within the subsurface (hyporheic zone) of a stream. The families of benthic macroinvertebrates include alderflies and fishflies, beetles, bugs, caddisflies, dragonflies and damselflies, mayflies, moths, true flies, stoneflies, crustaceans, molluscs, segmented worms, horsehair worms, flatworms and mites (Jones et al. 2005). All of these organisms require water for their entire life stage or for a portion of it (e.g., reproduction and early life stages).

Benthic invertebrates carry out necessary functions in a river or stream. Grouped into functional feeding groups, benthos can be shredders, grazers, collectors or predators (Cushing and Allan 2001). As such, each functional feeding group has specialized morphologic adaptations needed to carry out necessary functions. As a result, each functional feeding group plays a role in breaking down and assimilating organic matter in a stream, and this is required in a healthy stream.

The role of benthos in a stream is recognized in the River Continuum Concept. This concept views the entire river ecosystem as longitudinally changing physical templates overlain by biologic adaptations along these gradients (Vannote et al. 1980). Seasonal variations of organic matter supply along with structure and feeding types of the invertebrate community play a large role in all biological communities found within the stream (Wetzel 2001) and their ability to adapt to current conditions and future changes. Figure 4.13 depicts the generalized model of the River Continuum Concept.

Benthic macroinvertebrates are also indicators of stream health. Certain taxonomic groupings (families, genus and species) are tolerant of organic pollution, while others are very intolerant. One index used in assessing stream health is the Hilsenoff Biotic Index, which categorizes taxa based on their tolerance to organic pollution. Indices of stream health based on benthos are useful in assessing water quality, since benthos can represent changes over a long period of time, as their presence or absence is related to current and past land use as well as local adaptation.

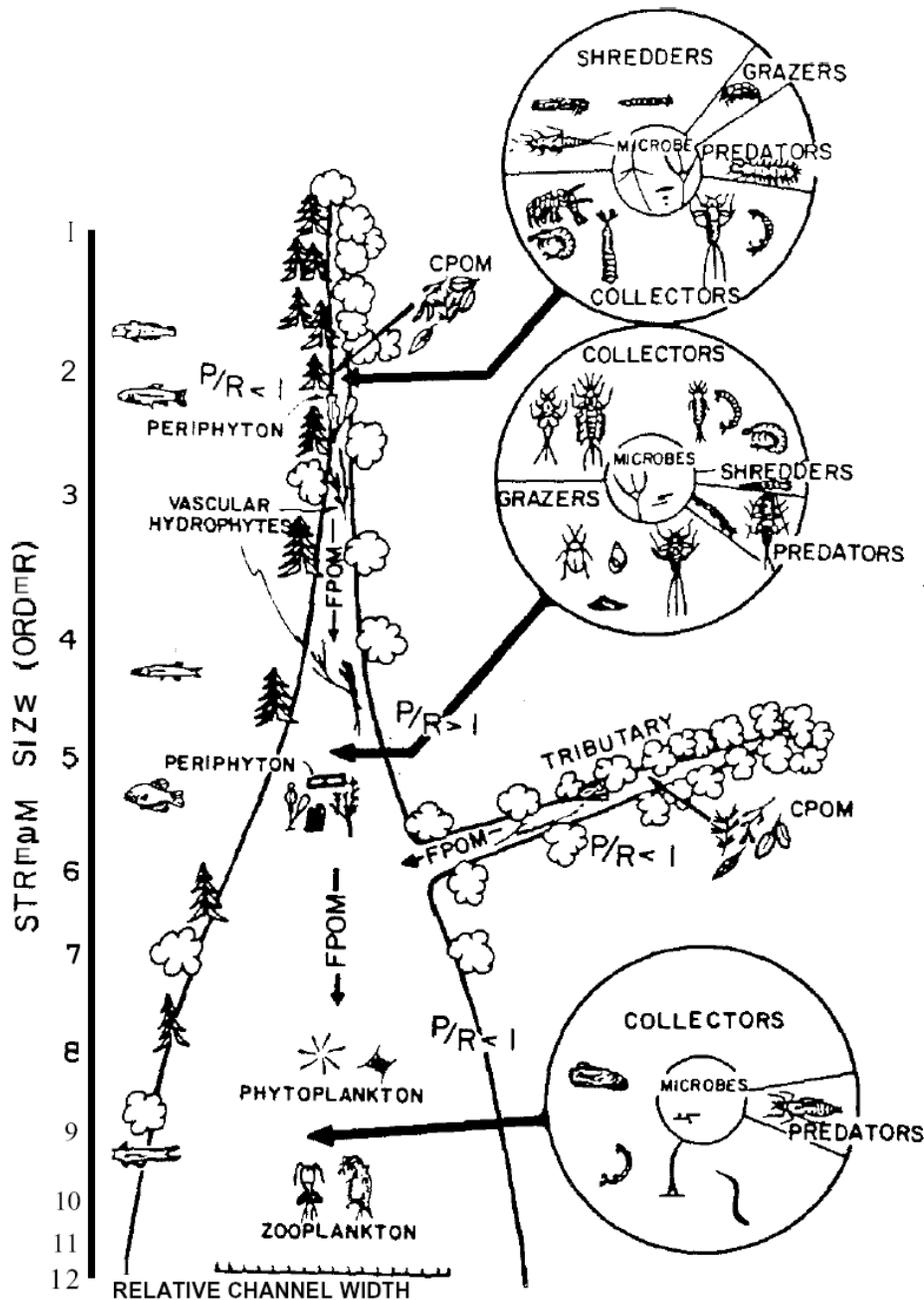

(Vannote et al. 1980)

Figure 4.13: River continuum concept

Benthic Macroinvertebrates Sampling Methods

Benthic macroinvertebrates are sampled using a kick and sweep method as defined in the Ontario Stream Assessment Protocol (Stanfield 2005). Benthic macroinvertebrates were sampled at a total of 12 sites in 2005 and 2007. Identification of 27 taxa groups was performed on a mixture of classes, orders, sub-orders and families. Sampling occurred primarily during the summer months

(July and August); pros and cons exist for this sampling time. A benefit of this sampling time is that invertebrates are most likely to show a response to habitat and stream impacts, since this is the most stressful season for biotic organisms given the high water temperature and low oxygen levels. However there is a low richness of species in relation to life history patterns (e.g., many aquatic insects have emerged to winged adults) (Jones et al. 2005).

Benthos diversity information was calculated with the Simpson's Diversity Index, where zero represents low diversity and one represents high diversity. Benthos was also used to rank water quality using the Hilsenhoff Biotic Index.

Benthic Macroinvertebrates as Indicators

Benthos diversity ranges from a low Simpson's diversity of 0.19 to a high diversity of 0.76 in the three watersheds. However, this reflects the diversity at coarser taxonomic levels, rather than species. In addition, the Ganaraska Region Conservation Authority does not sample during the spring and fall when benthic diversity is at its greatest in relation to the life stages of macroinvertebrates. By sampling in the summer, diversity may be low due to the absence of the macroinvertebrates that have left the aquatic environment for the terrestrial environment (Jones et al. 2005) or are within the aquatic environment as eggs.

Benthic macroinvertebrates can describe water quality based on the Hilsenhoff index, which gauges the degree of water quality impairment as it relates to nutrients. Using this index, most of the sample sites rank as "fairly poor" and "fair" water quality (Figure 4.14). It should be noted however, that habitat conditions unrelated to the amount of nutrients could affect the presence or absence of certain benthic species. Low gradient, soft bottom stream segments will contain higher numbers of tolerant species. Their presence likely reflects the substrate as opposed to the quality of the water. Similarly, certain species may not be present during summertime sampling due to life stage cycles. The influence of past land use, particularly agriculture, on present day diversity of stream invertebrates may result in long-term modifications to and reductions in aquatic diversity, regardless of reforestation of riparian zones (Harding et al. 1998). A lag of greater than 40 years may be needed before historic invertebrate diversity and composition are present. Also, benthic particulate organic matter, diatom density, percent of diatoms in *Eunotia* species, fish density in runs, and whole-stream gross primary productivity correlated with the amount of disturbed land in catchments in 1944 (Maloney et al. 2008). A more representative nutrient level analysis in watersheds should be presented through water chemistry analysis, described in Section 3.7 of this document.

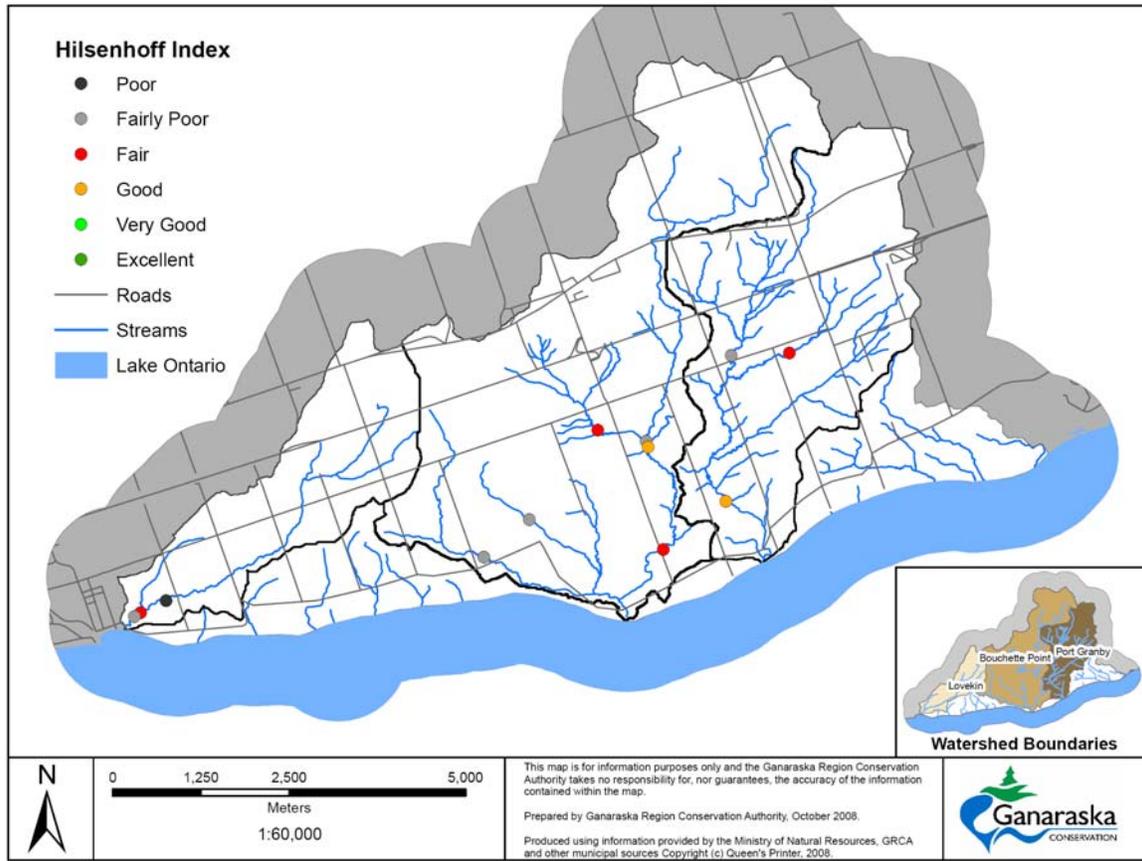


Figure 4.14: Hilsenhoff index of benthic macroinvertebrates

4.0.5 Riparian Areas

Riparian areas occur as transitional areas between aquatic and terrestrial habitats. Although not always well defined, they generally can be described as long, linear strips of vegetation adjacent to streams, rivers, lakes, reservoirs and other inland aquatic systems that affect or are affected by the presence of water (Fischer and Fischenich 2000). Riparian buffer, riparian zone, buffer strip and filter strip are terms often used and interchanged to define the extent and the functions of riparian areas. The role of riparian areas varies greatly and includes sediment retention, nutrient removal before entry into the waterbody, streambank stabilization, contribution to aquatic and riparian area biodiversity and habitats, and the regulation of stream temperature (Fischer and Fischenich 2000).

From a stewardship and management perspective riparian areas are defined as the benefit provided in relation to the width and functional contribution of the riparian area (Figure 4.15). The following describes the role and composition of a 50-metre riparian area along the creeks in the regional study area. A 50-metre buffer provides bank stability, sediment removal, soil-bound and soluble nutrient retention, protection and contribution to aquatic habitat, and provision of certain wildlife habitat (Figure 4.15). The role of riparian areas and their effectiveness on

benefiting the adjacent waterbody depends on soil type, slope, watershed size, function and cover type (Fischer and Fischenich 2000).

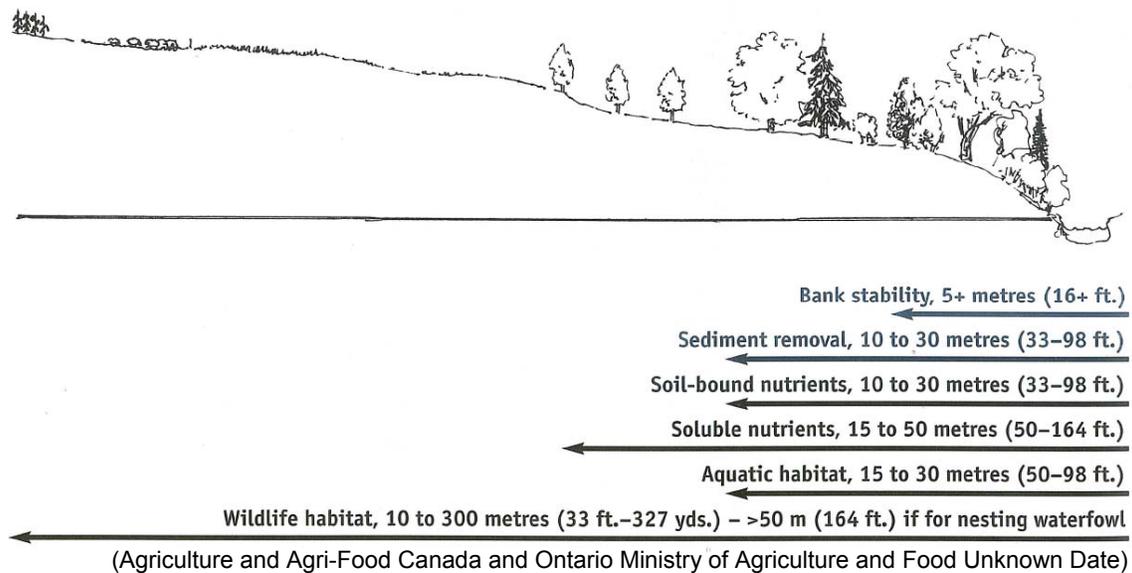


Figure 4.15: Riparian area functions

Classifying riparian area cover types using Ecological Land Classification data from 2002 shows that natural cover (forest, meadows and wetlands) dominate the amount of land cover within 50 metres from the stream banks (Figure 4.16). However agricultural land use occurs more than 30% of the 50-metre riparian area throughout and developed land cover more than 6% (Table 4.1). Bluffs also occur along the riparian area where creeks outlet to Lake Ontario.

Table 4.1: Percentage of land cover within 50-metre buffers

Land Cover	Watershed			Regional study area
	Lovekin Creek	Bouchette Point Creek	Port Granby Creek	
Forest	31	35	36	34
Agriculture	34	29	34	33
Meadows, savanna and thickets	22	13	14	15
Developed	10	6	9	7
Wetlands	2	17	7	9

Riparian areas mitigate surface water quality by reducing runoff into surface water, thereby reducing sedimentation and nutrient inputs. Where nutrients are a concern, riparian areas may not be adequate enough to hold back surface runoff, especially during heavy rainfall events (Carpenter et al. 1998). Retention of surface runoff is also dependent on the vegetative composition of the riparian area, and varies greatly between wetland, forested and grassed land cover (Mayer et al. 2006). Subsurface removal of nitrogen through plant uptake and

conversion occurs in a riparian area, but efficiency is not related to buffer width, rather to microbial denitrification and plant types that are conducive to the uptake of nutrients (Mayer et al. 2006). As a result the composition and structure of a riparian area are necessary in maintaining or improving water quality.

Riparian areas contribute to in-stream habitat through bank stabilization, cover creation from undercut banks, root wads and wood cover (Section 4.0.2). The location of wood cover seen through in-stream habitat sampling (Section 4.0.2) relates to the amount and location of forested riparian areas. In addition, the woody debris may not be allowed to enter the stream as a result of public and private land management in developed areas.

Stream temperature is maintained at a cold to cool water regime as a result of riparian areas providing shade to streams. Along with groundwater, riparian vegetation can regulate stream temperature (Moore et al. 2005). Stream temperatures presented in Section 4.0.3 can also be seen in relation to riparian area composition, with cold and cool water temperatures occurring in areas with forested riparian cover, and warm water temperatures occurring in urban areas where the channel is wider and where limited forests or shading are present.

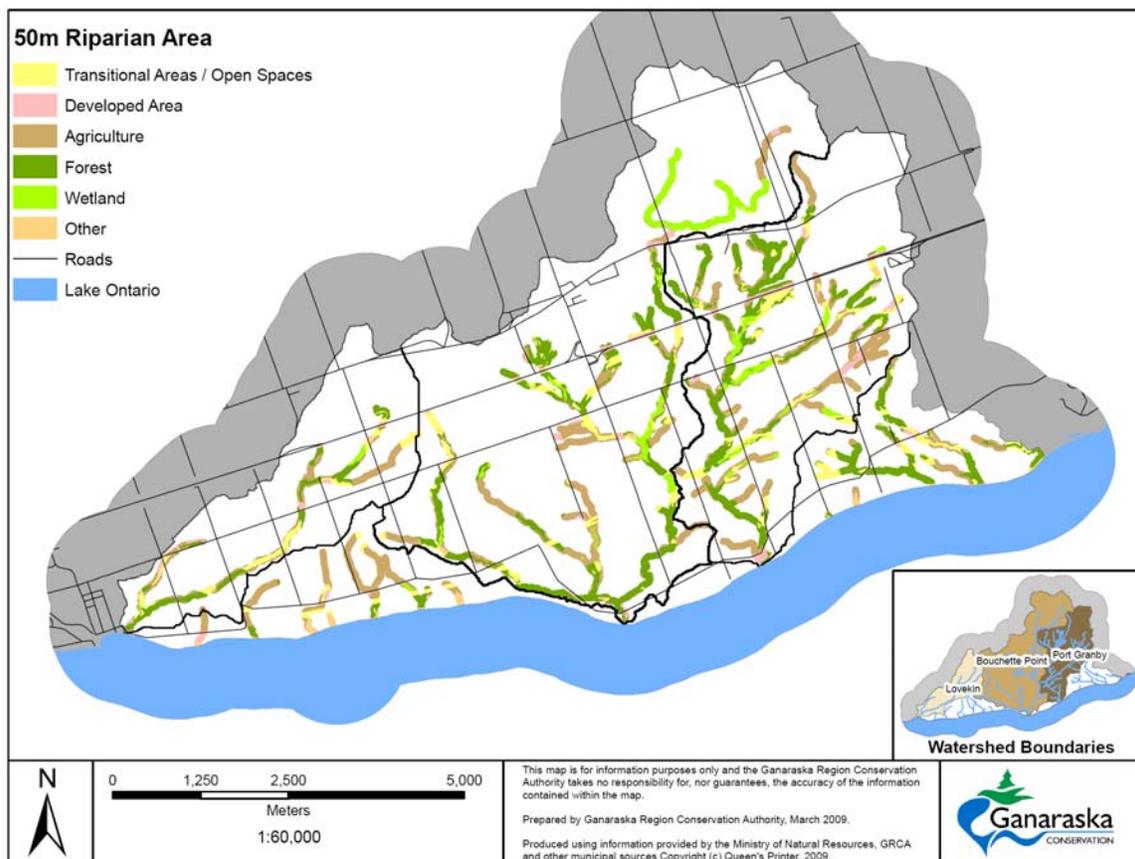


Figure 4.16: Fifty meter riparian area

4.1 TERRESTRIAL NATURAL HERITAGE

Terrestrial natural heritage includes forests, wetlands and meadows, as well as their associated species. These natural features are integral components of a watershed, and are entwined with human land uses. Natural heritage features contribute to healthy watersheds in part by providing habitat for diverse aquatic and terrestrial species and communities. These areas provide food, shelter and life stage requirements, including breeding areas and migratory corridors. Natural areas also provide erosion control, flood attenuation and clean water. Land cover composition in the watersheds is presented in Figure 4.17, and natural areas found in the watersheds are presented in Table 4.2.

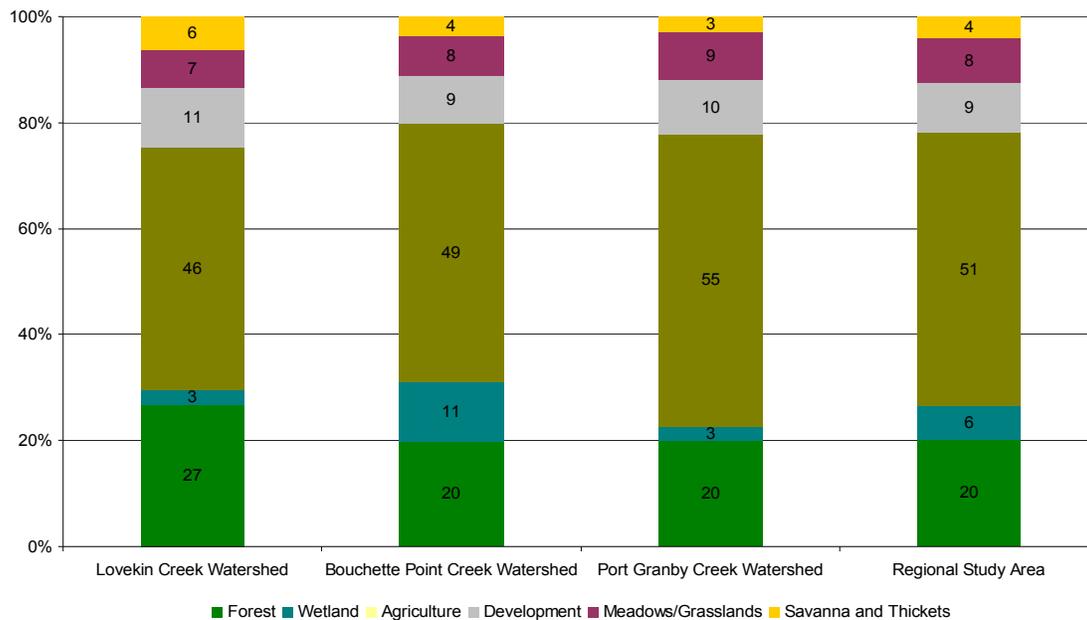


Figure 4.17: Land cover based on ecological land classification

Table 4.2: Natural areas

Watershed	Forests (km ²)	Meadows/Grasslands (km ²)	Savanna and Thickets (km ²)	Wetlands (km ²)
Lovekin Creek	2	0.5	0.4	0.2
Bouchette Point Creek	5	0.8	1.7	3
Port Granby Creek	3	1	0.4	0.4
Regional Study Area	10	4	2	3

* based on 2002 ELC Data.

4.1.1 Terrestrial Natural Heritage Study Methods

Terrestrial natural heritage can be assessed at three main scales: landscape, vegetation community or land use type, and species. The landscape level essentially follows principles of landscape ecology in which the entire landscape can be divided into three components: patches, corridors and the matrix (Forman

1996). In the heavily settled landscape of southern Ontario the original dominant landscape cover was forest. These and other associated natural areas have since become fragmented and are represented by patches. In the surrounding landscape the matrix - the dominant land use - is agricultural and urban. Corridors in this landscape are made up of both natural and man-made features such as riparian areas or roads. For the purpose of this background study, the landscape level is evaluated primarily for forest cover by looking at total cover, distribution and habitat patch characteristics.

Vegetation communities are mapped and evaluated using the Ecological Land Classification System for Southern Ontario (Lee et al. 1998), commonly referred to as ELC. This system categorizes community types at several levels of detail. The Ganaraska Region Conservation Authority has remotely mapped vegetation communities at the Community Series level of the ELC using colour ortho-corrected aerial photography. The more detailed ecosite and vegetation type levels of the ELC require field assessment, which is expensive and impractical over large areas where most land is in private ownership. The Natural Heritage Information Centre housed at the Ontario Ministry of Natural Resources has identified rare vegetation community types for Ontario at the vegetation type level. Without this level of mapping, this report combines the vegetation community reporting with the landscape level reporting, and an overall summary of conditions for major vegetation communities, specifically forest, grassland and wetland. Within these categories, rare communities, such as tallgrass prairie, are recognized.

There are many ways of evaluating terrestrial species, but it is a challenge to do so in a way that is relevant to the watershed context since individuals of many species can freely move between watersheds. What is needed is a way to use species as indicators of ecological health. As such, the Ganaraska Region Conservation Authority uses birds as indicators of forest health and frogs as indicators of wetland health. Theoretically, the more sensitive the species present and the more individuals, the healthier the ecosystem is likely to be. Roadside bird and frog surveys were undertaken as a rapid assessment approach to learning what can be found where. In this case ELC mapping was used to select a representative variety of forest patch sizes and landscape matrices for bird surveys and areas where a variety of wetland types could be found adjacent to roads.

Marsh Monitoring protocols were adapted for the roadside surveys, with 10-minute point counts used to record all birds seen and heard, and 3-minute point counts used to record singing frogs. Surveys were conducted to coincide with peak breeding for all species. In addition to indicator species, species of conservation concern are relevant to watershed management. In the future the Ganaraska Region Conservation Authority would like to develop an evaluation approach to identify species of local concern. In the meantime, reporting on this

topic will be limited to an overview of species at risk known to occur in the watershed.

4.1.2 Forests

A forest ecosystem is a community of plants, animals, microorganisms, and the physical environment they inhabit, in which trees are the dominant life form (Hunter 1990). Prior to European settlement forests covered more than 90% of southern Ontario (Larson et al. 1999). Widespread clearing for agriculture has resulted in a landscape of different successional stages and fragmented forest patches of varying sizes. The size, shape and connectivity of patches, as well as the types of land use in the surrounding landscape matrix have much to do with the species composition, and therefore the ecological integrity of the forest. The process of evolution and changes that occur to a forest ecosystem, either naturally or as a result of disturbance, is called forest succession. Succession can be defined as the process of change by which biotic communities replace each other and in which the physical environment becomes altered over a period of time (Kimmins 1996).

For the purpose of this report, forests are defined through ELC (Lee et al. 1998) and include coniferous, deciduous and mixed forests, and cultural plantations and woodlots. Treed swamps must be counted twice when calculating the area covered by forest and wetland separately, because a swamp is often only seasonally flooded and the ecosystem therefore functions as both wetland and forest. Swamp area must then be subtracted when the combined area forest and wetlands are calculated.

Coniferous and deciduous forests are classified as areas of land that contain more than 60% tree cover with a canopy cover of more than 75% coniferous or deciduous trees respectively. Mixed forests are also made up of more than 60% tree cover, but contain a canopy cover of at least 25% each of both conifer and deciduous tree species (Lee et al. 1998). Cultural plantations and woodlands are defined as an ecological community resulting from or maintained by cultural or anthropogenic activity. A cultural plantation has more than 60% tree cover, while cultural woodlands contain between 35% and 60% tree cover (Lee et al. 1998). Swamps contain more than 25% tree or shrub cover and are dominated by hydrophytic shrub or tree species.

Table 4.3 describes the proportion of forest types for each watershed and the regional study area and Figure 4.18 shows the locations. In summary the most forest cover (which also includes treed wetlands), occurs in the Bouchette Point Creek watershed (30%), followed closely by Lovekin Creek watershed (29%) and Port Granby Creek watershed (21%). In the entire regional study area forest cover accounts for 26% of the landscape.

Table 4.3: Percentage of forest types

ELC Defined Forest Type	Watershed			Regional Study Area
	Lovekin Creek	Bouchette Point Creek	Port Granby Creek	
Coniferous Forest	3	3.5	8	4
Deciduous Forest	2	1.5	1	2
Mixed Forest	30	12	10	12
Cultural Plantation	0.6	0.8	0.2	0.7
Cultural Woodlot	0.6	2	0.7	1
Thicket Swamp	1	0.5	0.1	0.4
Coniferous Swamp	0.8	0.03	0.02	0.1
Deciduous Swamp	0.3	0.6	0.6	0.5
Mixed Swamp	0.2	9	0.003	4

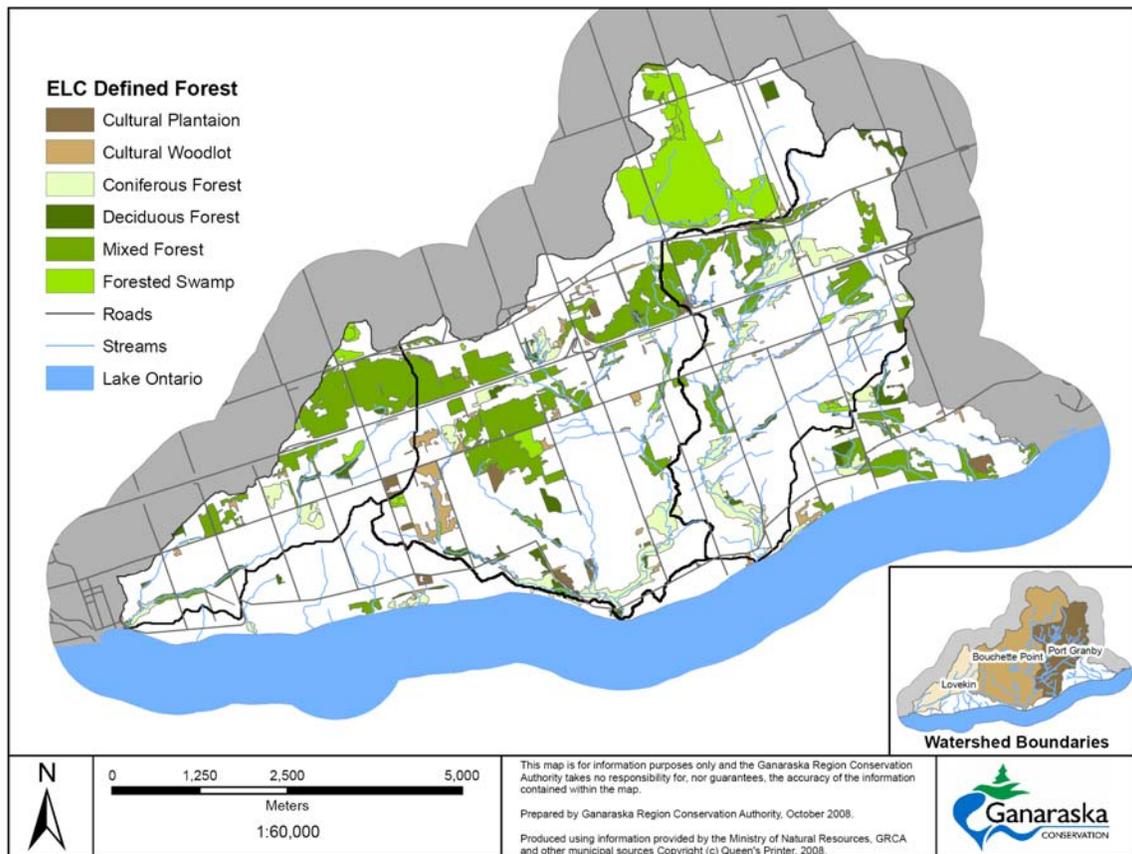


Figure 4.18: Forests

Different successional stages support different communities of plant and animal species. Although succession is often portrayed as progress terminated by disturbance, it can also be viewed as a cycle in which a series of plants and animals come and go (Hunter 1990). In order to maintain all plant and animals species in a landscape, it is necessary to maintain representation of all stages of

ecological succession, however not necessarily in equal amounts. Ideally natural disturbances such as fire and wind would dictate the relative abundance of different successional stages. During pre-settlement times old growth forest was likely dominant. Now this community type is rare and vastly under-represented. It has therefore become a conservation concern, and some mature woodlands should be managed to replace what was lost.

Patch (woodlot) size is an important consideration for forest management. Small isolated patches have limited capacity to sustain populations of many animal species. In contrast, large connected patches can support more species and more individuals of each species. They are also more likely to cover a variety of topography supporting more forest vegetation types, as well as natural disturbance regimes. A basic principle of conservation biology is that bigger patches are generally better for supporting biodiversity. Tables 4.4 and 4.5 depict the relationship between forest patch size and the types of species of wildlife that utilize particular patch sizes.

Table 4.4: Wildlife use of various forest patch sizes

Area	Forest/Treed Swamp
1 ha	<ul style="list-style-type: none"> ■ Edge tolerant mammals (Gray Squirrel) ■ Common edge-tolerant birds (Blue Jay, American Crow) ■ A few birds may be associated with mature trees (Black-capped Chickadee, Eastern Wood-Pewee)
4 ha	<ul style="list-style-type: none"> ■ A very few common edge-tolerant birds (Downy Woodpecker, Great Crested Flycatcher) ■ Eastern Chipmunk may be present
10 ha	<ul style="list-style-type: none"> ■ Still dominated by edge-tolerant species may have very small areas of interior habitat supporting low numbers of modestly area-sensitive species (Hairy Woodpecker, White-breasted Nuthatch)
30 ha	<ul style="list-style-type: none"> ■ May be large enough to support some species of salamander ■ Small populations of edge-intolerant species (Winter Wren, Brown Creeper, Black-and-White Warbler)
50 to 75 ha	<ul style="list-style-type: none"> ■ A variety of area-sensitive species may be present; some will be absent if there is no nearby suitable habitat ■ Still predominantly edge influenced, but will support small populations of most forest bird species ■ Some will be absent if there is no nearby suitable habitat
100 to 400 ha	<ul style="list-style-type: none"> ■ All forest-dependent bird species ■ Many will still be in low numbers and may be absent if there is no nearby suitable habitat ■ Woodland Jumping Mouse may be present
1,000 ha	<ul style="list-style-type: none"> ■ Suitable for almost all forest birds ■ Some forest-dependent mammals present, but most still absent
10 000 ha	<ul style="list-style-type: none"> ■ Almost fully functional ecosystem, but may be inadequate for a few mammals such as Gray Wolf and Bobcat (100 000 ha has been suggested as a minimum)

(Environment Canada 2005c)

Table 4.5: Anticipated response by forest birds to size of largest forest patch

Size of Largest Forest Patch	Response by Forest Associated
200 ha	Will support 80 percent of edge-intolerant species including most area-sensitive species.
100 ha	Will support approximately 60 percent of edge-intolerant species including most area-sensitive species.
50 - 75 ha	Will support some edge-intolerant species, but several will be absent and edge-tolerant species will dominate.
20 - 50 ha	May support a few area-sensitive species but few that are intolerant of edge habitat.
<20 ha	Dominated by edge-tolerant species only.

(Environment Canada 2005c)

Forest patches that are compact in shape rather than convoluted are also generally better for many species, particularly those that require damp, dark, forest interior habitat. A number of birds experiencing population declines that require forest interior have been noted in the *Atlas of the Breeding Birds of Ontario, 2001-2005* (Cadman et al. 2007). Interior is generally considered to be forest area that is beyond 100 m from the outside edge of the patch. The first 100 metres is considered to be prone to negative edge effects originating in the surrounding landscape, including higher temperatures, exposure to wind resulting in desiccation or storm damage, increases in predation and parasitism, and invasions by exotic plants.

Currently, and based on 2002 ELC, only 22% of the total forest cover of the regional study area is forest interior. Of this 6% is considered deep interior forest which is the area within 200 m from the outside edge of the patch (Figure 4.19). Of specific interest, in the regional study area interior forest is primarily associated with forested wetlands.

Given that much of the remaining forest cover in the Ganaraska Region Conservation Authority lies in valleylands, there are a large number of convoluted patches relative to compact ones that tend to be on tablelands. This means an overall high edge-to-area ratio and accounts for the low amount of interior habitat. Comparatively, the Lovekin Creek and Bouchette Point Creek watersheds have a relatively large amount of tableland forest, which tends to result in better overall shapes. Forests in the Port Granby Creek watershed are more like the regional context, with generally convoluted shapes resulting from associations with valleylands. In all cases, natural heritage system modeling can identify opportunities to improve patch shape, and these can help set priorities for private land stewardship.

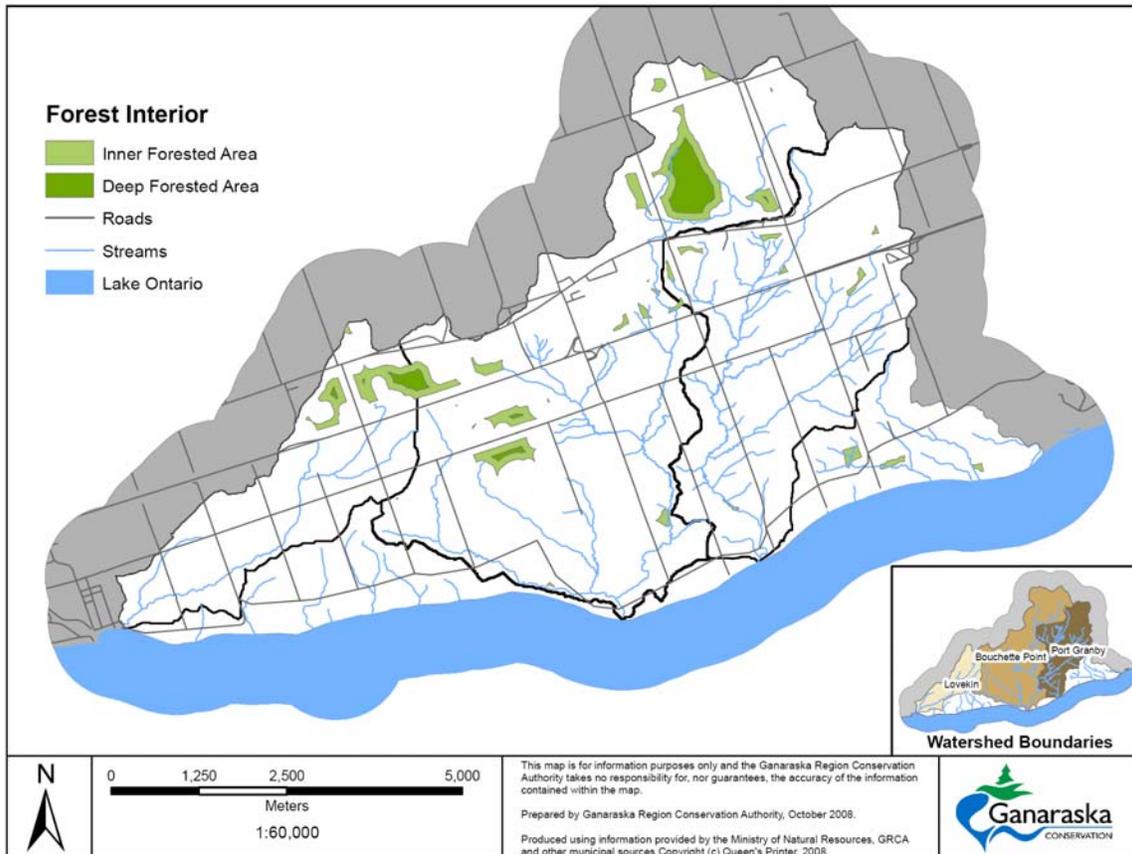


Figure 4.19: Forest Interior

In a fragmented landscape, connectivity is a key issue for all habitat types, including forest. In landscape ecology there are two types of connectivity. Structural connectivity refers to the physical layout of habitat patches on the landscape. Functional connectivity refers to the degree to which certain species are capable of moving through this structure. Species such as the American Crow (*Corvus brachyrhynchos*) is a habitat generalists and have unlimited mobility. In contrast, habitat specialists with limited mobility require contiguous specific habitats for food and cover. It is the latter that tend to be a conservation concern. Without connectivity, isolated populations of these species are at risk of inbreeding and loss of fitness. This can lead to small populations disappearing incrementally across the landscape, contributing to the regional loss of the species.

There are metrics for measuring structural connectivity with Geographic Information Services (GIS), such as the proximity of forest or other habitat patches (using GIS polygons or pixels). However, measuring functional connectivity would require modeling the potential movements of species or groups of species of conservation concern. This approach can be combined with a measure of road density, as roads are barriers to wildlife movement through the natural heritage system. More data on the specific habitat requirements of

species and more detailed vegetation type mapping will be required in order to undertake this analysis of functional connectivity.

Related to both connectivity and patch size is the total amount and distribution of forest cover in the landscape or watershed. The question “how much habitat is enough?” is frequently asked when attempting to protect natural heritage features or systems. In fact, this is a very difficult question to answer because of complex issues related to species population dynamics and interacting components of ecosystems, not to mention our limited understanding of these. Nevertheless, the amount of 30% forest cover has been widely advocated (Environment Canada 2005c). This is based largely on studies that demonstrated that landscapes with 20 to 30% forest cover tended to support the majority of bird species known in a given area. However, caution must be used when applying such generic cover recommendations. First, because they can fly, birds may not be good surrogates for other species that have limited mobility. Secondly, supporting the majority of species means that some species may not be supported. Finally, if a landscape supports more than 30% forest cover, does this mean we can afford to *lose* cover?

In short, conservation goals that set targets of 30 to 40% cover will not be adequate to conserve all species (Groves 2003), and there is no single threshold of habitat cover for species persistence (Fahrig 2001). When one factors in other concerns such as water quality and quantity and ecological functions that work at landscape scales, the amount of cover required for integrity is likely to be higher, not lower. Therefore, use of the precautionary principle is recommended.

There are other considerations. If all of the 30% forest cover is concentrated in one part of a watershed, does this mean the amount is adequate? In these watersheds the majority of forest cover is in the headwaters. This is a good thing hydrologically because the forest helps to retain water. It is also a good thing in that these forest patches tend to be larger and better connected, and therefore have greater integrity in terms of species composition and ecological function. However, it also means that forest patches in other parts of the watersheds are smaller more isolated, and have less ecological integrity. Clearly there is room for improvement in habitat cover, even if there is already more than the minimum standard. More cover and more even distribution of cover are both important. In short, although the Lovekin Creek and Bouchette Point Creek watersheds have a good amount of forest relative to the 30% guideline, there is need for improvement in patch size, shape, connectivity and overall distribution of forest cover. At only 21% forest cover, the Port Granby Creek watershed is well short of even the 30% guideline. The use of GIS to undertake natural heritage system modeling can be used to identify priority areas for natural cover improvement.

4.1.3 Grasslands and Thickets

Grasslands include cultural meadows, cultural savannas and cultural thickets as well as natural tallgrass prairie and savanna. The “cultural” communities are essentially stages of ecological succession as a disturbed landscape gradually reverts to forest. In many cases this amounts to abandoned agricultural fields, although cultural meadows may be fields that have simply been left fallow. These habitats play a role in overall watershed functions. They allow for reduced runoff, by slowing surface water runoff, filtering out sediments and reducing erosion.

Many species rely specifically on grassland habitats and some are of conservation concern. A decline in bird species associated with grassland and shrubland habitats across Ontario has been noted in the *Atlas of the Breeding Birds of Ontario, 2001-2005*. There are also declines in the Lake Simcoe-Rideau atlas study region, which includes these three watersheds (Cadman et al. 2007). This is part of a disturbing trend across eastern North America. These birds include Bobolink (*Dolichonyx oryzivorus*), Eastern Meadowlark (*Sturnella magna*), Upland Sandpiper (*Bartramia longicauda*), and a number of sparrow species. This change in grassland bird species abundance has been related to temporal landscape changes. Grassland bird species expanded with the clearing of forests in the 19th and early 20th centuries, however today bird species associated with grassland habitat in Ontario appear to be declining (Cadman et al. 2007). This decline could be related to grassland and shrubland habitats becoming reforested, intensification of agricultural practices (e.g., improved pastures and increased cropping), and urban development (McCracken 2005).

Meadows/grasslands, savanna and thickets across the watersheds are found in table 4.6. As defined by ELC cultural meadows contain less than 25% tree cover and less than 25% shrub cover, have a large portion of non-native plant species, and result from or are maintained through anthropogenic actions (Lee et al. 1998). Most of these are old fields have occurred from retired agricultural lands and others land that has been left fallow. Cultural savannas, as defined by ELC, contain between 25% and 35% tree cover, have a large portion of non-native plant species, and result from or are maintained through anthropogenic actions (Lee et al. 1998). Cultural thickets contain less than 25% tree cover and more than 25% shrub cover (Lee et al. 1998).

Table 4.6: Percentage of grasslands and thickets

ELC Definition	Watershed			Regional Study Area
	Lovekin Creek	Bouchette Point Creek	Port Granby Creek	
Meadows/Grasslands	7	8	9	8
Savanna	2	0.9	0.3	0.8
Thickets	4	3	3	3

It is difficult to set cover targets for grasslands and shrublands. First, despite the conservation concerns associated with them, grasslands, in particular the cultural varieties may actually be over-represented in southern Ontario relative to pre-settlement conditions when forest dominated the landscape. Second, because they are stages in ecological succession, maintaining an area as grassland would require active management, and to do this on a large scale would be impractical. It can be argued that if the goal is to improve forest cover relative to historical conditions, it may be a good thing that grassland and shrublands are undergoing succession. Indeed, cultural meadows may be prime areas for tree planting. Perhaps the best bet is to track habitat and land use changes, with the ultimate goal being to ensure that some form of each successional stage is well represented in the watershed or regional landscape. Furthermore, it might be advantageous to invest more in native tallgrass prairie restoration than in maintaining unnatural old field habitats.

4.1.4 Wetlands

Wetlands occur throughout the regional study area. Based on ELC, wetlands include meadow marsh, shallow marsh, deciduous swamps, coniferous swamps, mixed swamps, thicket swamps and bogs. Treed swamps must be counted twice when calculating the area covered by forest and wetland separately, because a swamp is often only seasonally flooded and the ecosystem therefore functions as both wetland and forest. Swamp area must then be subtracted when the combined area forest and wetlands is calculated. One large wetland complex exists in the Bouchette Point Creek watershed and is recognized by the province as significant (see section 4.1.7 for more detail).

Marshes are classified as having water depth less than 2 m, containing less than 25% tree and shrub cover, and dominated by emergent hydrophytic macrophytes (Lee et al. 1998). A meadow marsh contains plant species that are less tolerant to prolonged flooding, since soils become moist to dry in the summer. Meadow marshes are typically found in riparian zones and may form the transition point between shallow marsh and upland habitat. In shallow marshes, by contrast, standing or flowing water tends to remain all year. Dominant vegetation is typically cattail, although the invasive Common Reed (*Phragmites australis*) may take its place, especially in roadside marshes.

Swamps contain more than 25% tree or shrub cover and are dominated by hydrophytic shrub and tree species. Water depths are less than 2 m with standing water or vernal pooling on more than 20% of the land base (Lee et al. 1998). Differences between swamp communities are based on tree canopy cover, tree species and the amount of tree cover. Table 4.7 describes the proportion of wetland types and locations are shown in Figure 4.20.

Swamps are the most abundant wetland type in southern Ontario, and in the regional study area. Like other wetlands, many species rely on swamps for

habitat. For example, they provide critical breeding areas for salamanders and frogs, and the cool, moist conditions required by birds such as the Northern Waterthrush (*Seiurus noveboracensis*) and Winter Wren (*Troglodytes troglodytes*). Some swamp species, such as Mallard (*Anas platyrhynchos*) and Wood Duck (*Aix sponsa*), are economically important (i.e., hunting opportunities). The diversity, species, and abundance of flora and fauna that swamps as well as marshes provide is dependant on the size of the ecosystem (Table 4.8).

Depending on the terrain and geology, swamps contribute to aquatic habitats as well. Swamps provide groundwater discharge areas, providing an in-stream temperature regime required by native Brook Trout and other coldwater fish species. Swamps also contribute nutrients, food and habitat to aquatic organisms in nearby streams. Similar to marshes, swamps also mitigate floodwaters and improve water quality.

Thicket swamps are low wet areas dominated by shrubs such as Red Osier Dogwood (*Cornus stolonifera*) and Speckled Alder (*Alnus rugosa*). These wetlands deserve special mention because they are the principle habitat of the Western Chorus Frog (*Pseudacris triseriata*) a tiny species that has been experiencing rapid population declines throughout its range. In many cases thicket swamps are too small to pick up when interpreting aerial photographs, therefore the total cover for this wetland type may be deceiving. Even tiny thicket swamps can support an entire local breeding population of Chorus Frogs therefore the value of these areas should be recognized.

Bogs are still water wetlands where anerobic conditions have resulted in a gradual build up of peat. Generally bogs are characterized by the presence of *Sphagnum* moss, and can be open, dominated by ericaceous shrubs such as Leatherleaf (*Chamaedaphne calycullata*), or be treed, typically with Tamarack (*Larix laricina*). A portion of the Newtonville Bog wetland in the Bouchette Point Creek watershed has characteristic bog features. Such habitats are rare south of the Canadian Sheild, and this is the only known example in the Ganaraska Region Conservation Authority. More detail can be found in Section 4.1.7.

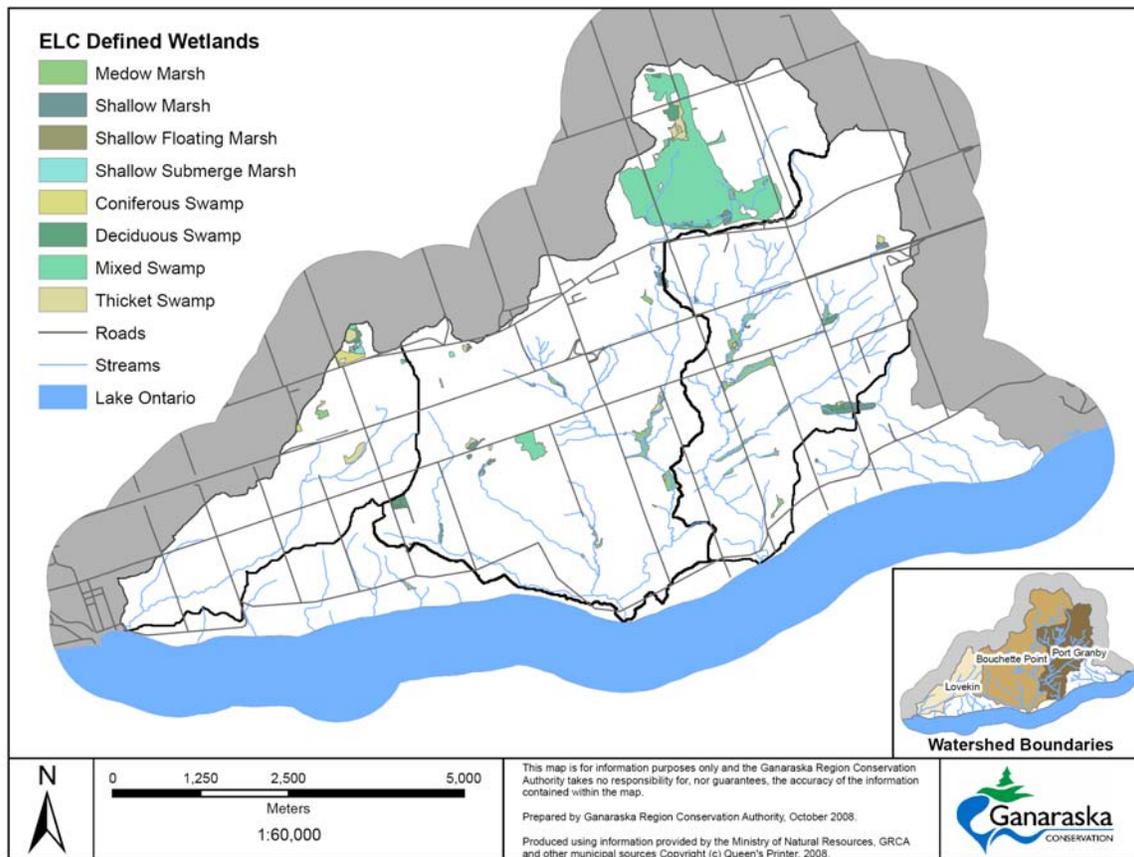


Figure 4.20: Wetlands

Table 4.7: Percentage of wetland types

ELC Defined Wetland Type	Watershed			Regional Study Area
	Lovekin Creek	Bouchette Point Creek	Port Granby Creek	
Meadow Marsh	0.2	0.7	1.6	0.8
Shallow Submerged Aquatic	0.4	0.02	0.03	0.07
Shallow Aquatic Floating	0	0.006	0	0.003
Shallow Marsh	0	0.2	0	0.2
Thicket Swamp	1	0.5	0.1	0.4
Coniferous Swamp	0.8	0.03	0.02	0.1
Deciduous Swamp	0.3	0.6	0.6	0.5
Mixed Swamp	0.2	9	0.003	4

Vernal pools can have a similar function to swamps, but on a smaller scale. These are ponds that are formed in depressions as a result of snowmelt and rain. Typically they dry up by mid to late summer. This means they are unsuitable for fish, which in turn makes them ideal breeding habitats for many species that would otherwise be subject to fish predation. Salamanders in particular rely on

these habitats, and entire populations from surrounding woodlands may go to a single pond to breed in early spring.

Frogs such as Spring Peeper (*Pseudacris crucifer*) and Wood Frog (*Rana sylvatica*) rely on vernal pools and forest swamps for breeding. These amphibians are important elements of the food chain. Maintaining vernal pools and connectivity between these and upland forests is vital for the survival of populations. Vernal pools are increasingly being recognized as a conservation concern (Colburn 2005). However, because of their small size and the fact that they frequently occur in forests, they are difficult to map accurately. More work is needed to inventory and map these critical habitats.

Wetlands play an important function in any temperate watershed, and each wetland type contributes differently to the processes that are carried out. Marshes are very efficient in improving water quality, however efficiency depends on the location of marshes relative to overland flow, the substrate type within the marshes, dominant plant species, climate, and the retention time of the water within the marsh (Environment Canada 2005c). Marshes are also important in mitigating floods by storing flood waters and reducing flow velocity, and ultimately peak flows in a water system (Environment Canada 2005c).

Environment Canada's framework for guiding habitat rehabilitation (Environment Canada 2005c) recommends that watersheds should contain more than 10% wetland cover, however, historically watersheds may have had more or less. The capacity for natural wetlands is based largely on topography and soils. Rather than see an increase in wetland cover of a certain percentage, it may be possible to undertake a soil and slope analysis and combine this with what we know about hydrology to determine the capacity for an increase in wetland cover in the regional study area.

Table 4.8: Wildlife use of various swamp and marsh sizes

Area	Forest/Treed Swamp	Marsh
1 ha	<ul style="list-style-type: none"> ■ Edge tolerant mammals (Gray Squirrel) ■ Common edge-tolerant birds (Blue Jay, American Crow) ■ A few birds may be associated with mature trees (Black-capped Chickadee, Eastern Wood-Pewee) 	<ul style="list-style-type: none"> ■ Small populations of Muskrat ■ Edge-tolerant birds (Red-winged Blackbird, Canada Goose, Mallard) ■ Persistent and common herpetofauna (such as Green Frog and Midland Painted Turtle)
4 ha	<ul style="list-style-type: none"> ■ A very few common edge-tolerant birds (Downy Woodpecker, Great Crested Flycatcher) ■ Eastern Chipmunk may be present 	<ul style="list-style-type: none"> ■ Similar species as above, but may also support Bullfrog
10 ha	<ul style="list-style-type: none"> ■ Still dominated by edge-tolerant species may have very small areas of interior habitat supporting low numbers of modestly area-sensitive species (Hairy Woodpecker, White-breasted Nuthatch) 	<ul style="list-style-type: none"> ■ May support Marsh Wren, other waterfowl species
30 ha	<ul style="list-style-type: none"> ■ May be large enough to support some species of salamander ■ Small populations of edge-intolerant species (Winter Wren, Brown Creeper, Black-and-White Warbler) 	<ul style="list-style-type: none"> ■ Similar marsh bird species as above, plus possibly Black Tern
50 to 75 ha	<ul style="list-style-type: none"> ■ A variety of area-sensitive species may be present; some will be absent if there is no nearby suitable habitat ■ Still predominantly edge influenced, but will support small populations of most forest bird species ■ Some will be absent if there is no nearby suitable habitat 	<ul style="list-style-type: none"> ■ Least Bittern may be present in marshes of this size
100 to 400 ha	<ul style="list-style-type: none"> ■ All forest-dependent bird species ■ Many will still be in low numbers and may be absent if there is no nearby suitable habitat ■ Woodland Jumping Mouse may be present 	<ul style="list-style-type: none"> ■ Small numbers of diving ducks possible (e.g., Redhead, Canvasback, Ruddy Duck)
1,000 ha	<ul style="list-style-type: none"> ■ Suitable for almost all forest birds ■ Some forest-dependent mammals present, but most still absent 	<ul style="list-style-type: none"> ■ All marsh species, although some may still have small populations
10 000 ha	<ul style="list-style-type: none"> ■ Almost fully functional ecosystem, but may be inadequate for a few mammals such as Gray Wolf and Bobcat (100 000 ha has been suggested as a minimum) 	<ul style="list-style-type: none"> ■ Fully-functional ecosystem

(Environment Canada 2005c)

4.1.5 Species at Risk and Species of Concern

Provincial legislation has provided for the identification and protection of Species at Risk in Ontario. The legislated purposes of the *Endangered Species Act, 2007* are:

- To identify Species at Risk based on the best available scientific information, including information obtained from community knowledge and aboriginal traditional knowledge
- To protect species that are at risk and their habitats, and to promote the recovery of species that are at risk
- To promote stewardship activities to assist in the protection and recovery of species that are at risk.

A number of Species at Risk have been identified in the Ganaraska Region Conservation Authority jurisdiction (Table 4.9). The status of these species has been designated by the Committee on the Status of Species at Risk in Ontario (COSSARO), an independent body that assesses and classifies species at risk, and/or by the federal Committee on the Status of Endangered Wildlife in Canada (COSEWIC). A list of these species is found in Table 4.9.

Table 4.9: Provincially listed Species at Risk within the Ganaraska Region Conservation Authority

Scientific Name	Common Name	COSSARO Status	COSEWIC Status
<i>Colinus virginianus</i>	Northern Bobwhite	END	END
<i>Rallus elegans</i>	King Rail	END	END
<i>Coturnicops noveboracensis</i>	Yellow Rail	SC	SC
<i>Lanius ludovicianus</i>	Loggerhead Shrike	END	END
<i>Ammodramus henslowii</i>	Henslow's Sparrow	END	END
<i>Ixobrychus exilis</i>	Least Bittern	THR	THR
<i>Chlidonias niger</i>	Black Tern	SC	
<i>Haliaeetus leucocephalus</i>	Bald Eagle	SC	
<i>Melanerpes erythrocephalus</i>	Red-headed Woodpecker	SC	THR
<i>Dendroica cerulean</i>	Cerulean Warbler	SC	SC
<i>Vermivora chrysoptera</i>	Golden-winged Warbler	SC	THR
<i>Icteria virens</i>	Yellow-breasted Chat	SC	SC
<i>Wilsonia citrina</i>	Hooded Warbler	THR	THR
<i>Emydoidea blandingii</i>	Blanding's Turtle	THR	THR
<i>Sternotherus odoratus</i>	Stinkpot Turtle	THR	THR
<i>Graptemys geographica</i>	Northern Map Turtle	SC	SC
<i>Heterodon platyrhinos</i>	Eastern Hog-nosed Snake	THR	THR
<i>Tamnophis sauritus</i>	Eastern Ribbonsnake	SC	SC
<i>Lampropeltis triangulum</i>	Eastern Milksnake	SC	SC
<i>Danaus plexippus</i>	Monarch Butterfly	SC	SC
<i>Panax quinquefolius</i>	American Ginseng	END	END
<i>Juglans cinerea</i>	Butternut	END	END
<i>Platanthera leucophaea</i>	Eastern Prairie Fringed Orchid	END	END

SC = Special Concern, THR = Threatened, END = Endangered

Many of the records for these species are historical, and there is a need to revisit some areas to determine if any individuals are still present. Should this be the case, the responsibility falls into the hands of the provincial or federal government, although local organizations including the Ganaraska Region Conservation Authority, can work with government authorities and landowners on stewardship measures to enhance protection for these species.

It is important to keep in mind that although species at risk are designated based on their national or provincial status, population declines frequently begin at the local level. There is a real need to gain a better understanding of the local status of sensitive species, and to develop a list of locally rare species. Such a list can help inform planning decisions such that populations of species are retained as components of healthy ecosystems. The habitats that support these should also be identified, along with any opportunities to protect them.

Finally, given the proximity to such a large body of water as Lake Ontario, all natural habitats in these watersheds can have an elevated value as seasonal stopover habitats for migratory birds and monarch butterflies. For example, large

numbers of individuals may wait for days at a time for optimum conditions to cross the lake, or require opportunities to feed and rest having crossed the lake on the journey north. Seasonal habitat use in this area has also been reported for the Short-eared Owl (*Asio flammeus*), a species designated as “Special Concern” in the province.

4.1.6 Invasive Species

In terrestrial habitats the invasive species that are currently of greatest immediate concern are plants, especially Dog-strangling Vine (*Cynanchum rossicum*), European Buckthorn (*Rhamnus cathartica*), and Garlic Mustard (*Alliaria petiolata*). All of these can have a negative impact on biodiversity by colonizing natural areas, gaining a competitive edge, and eventually displacing native species.

Dog-strangling vine is of particular concern and it is spreading rapidly in this part of the province. It can be found in habitats ranging from old fields to mixed and riparian forests. As is demonstrated at the Orono Crown Forest, it does particularly well in pine plantations where it can prevent understory growth and tree regeneration as well as hamper harvesting efforts. Garlic Mustard prefers moister, less acidic conditions and is a threat to riparian and hardwood forests. European Buckthorn is ubiquitous in much of southern Ontario because it was widely used in hedgerows and is spread as fruits are eaten by birds. Control of all three of these and other invasive plants is difficult once they become well-established. Early detection and rapid response is the key. Infestations should be mapped, rate of spread monitored, and response prioritized. Control efforts should be coordinated between organizations with an interest in invasive plant control.

Recent exotic insects of concern in Ontario are the Asian Long-horned Beetle (*Anoplophora glabripennis*) and the Emerald Ash Borer (*Agilus planipennis*). So far neither of these has been found in the Ganaraska Region Conservation Authority, but either could have devastating impacts on forests. Sightings of insects thought to be these species should be reported immediately to the Canadian Food Inspection Agency.

4.1.7 Areas of Natural and Scientific Interest

The Ministry of Natural Resources is responsible for determining Areas of Natural and Scientific Interest (ANSI) and provincially significant wetlands (PSW). At present, the Ontario Wetland Evaluation System is used in conjunction with provincial scoring criteria to identify provincially significant wetlands and wetland complexes. Environmentally Sensitive Areas (ESA) shown in Figure 4.21 was identified as such in Ganaraska Region Conservation Authority (1983). These lands are seen as sensitive from intensive land use such as urban development.

Newtonville Swamp and Bog

Designated as an ANSI, this 123 hectare (304 acre) swamp-bog complex is drained by Bouchette Point Creek. The swamp is dominated by Silver Maple (*Acer saccharinum*), elm (*Ulmus*) and Black Ash (*Fraxinus nigra*). The bog 1.6 hectare (4 acre) in size consists of Tamarack (*Larix laricina*), Eastern White Cedar (*Thuja occidentalis*) and Black Spruce (*Picea mariana*), with Leatherleaf (*Chamaedaphne calycullata*) and Huckleberry (*Gaylussaccia buccata*) thickets (Natural Heritage Information Centre 2008). This complex is bisected by Concession Road 3 from the Graham Creek wetlands complex. The provincially recognized Newtonville wetland is situated in the ANSI complex.

Clarke Summit Wetland Complex (PSW)

The Clarke Summit Wetland Complex is a provincially significant wetland complex, made up of 11 individual wetlands. A small portion of the complex is located in the headwaters of Lovekin Creek, with the remainder in Graham Creek to the north. These wetlands are composed of swamps (99%) and marsh (1%). Totalling 146 hectares, the dominant vegetation is deciduous trees, tall shrubs and coniferous trees (Natural Heritage Information Centre 2008).

Bond Head Bluffs

The Bond Head Bluffs are a provincially designated ANSI with a total size of 48 hectares. A continuous post-glacial Iroquois Plain cliffs, the Bond Head Bluffs are located along Lake Ontario from east of Lovekin Creek to the west tributary of Bouchette Point Creek. Varying from 8 to 46 meters in height the bluffs are interrupted by numerous lakefront marshes and creek valley system (Natural Heritage Information Centre 2008). This ANSI was used extensively for Brookfield et al. (1982) study of regional geologic formations and structure.

Port Granby East Bluffs and Ravine

The Port Granby East Bluffs encompass an area of 17.2 hectares and extend along the Lake Ontario shoreline for 2.5 km (Natural Heritage Information Centre 2008). These bluffs extend vertically to a maximum of 26 m and differ from the Bond Head Bluffs given that they are located in a till plain and have a drier moisture regime. The ravine is located at the mouth of Port Granby East and extends inland 1.7 km, taking in an area of 50.2 hectares (Natural Heritage Information Centre 2008). The Port Granby East Ravine is one of a few relatively mature deciduous forests in the Iroquois Plain in Northumberland County. The ravine contains a relatively high diversity of vascular plant species, including rare species, breeding birds and mammals (Natural Heritage Information Centre 2008).

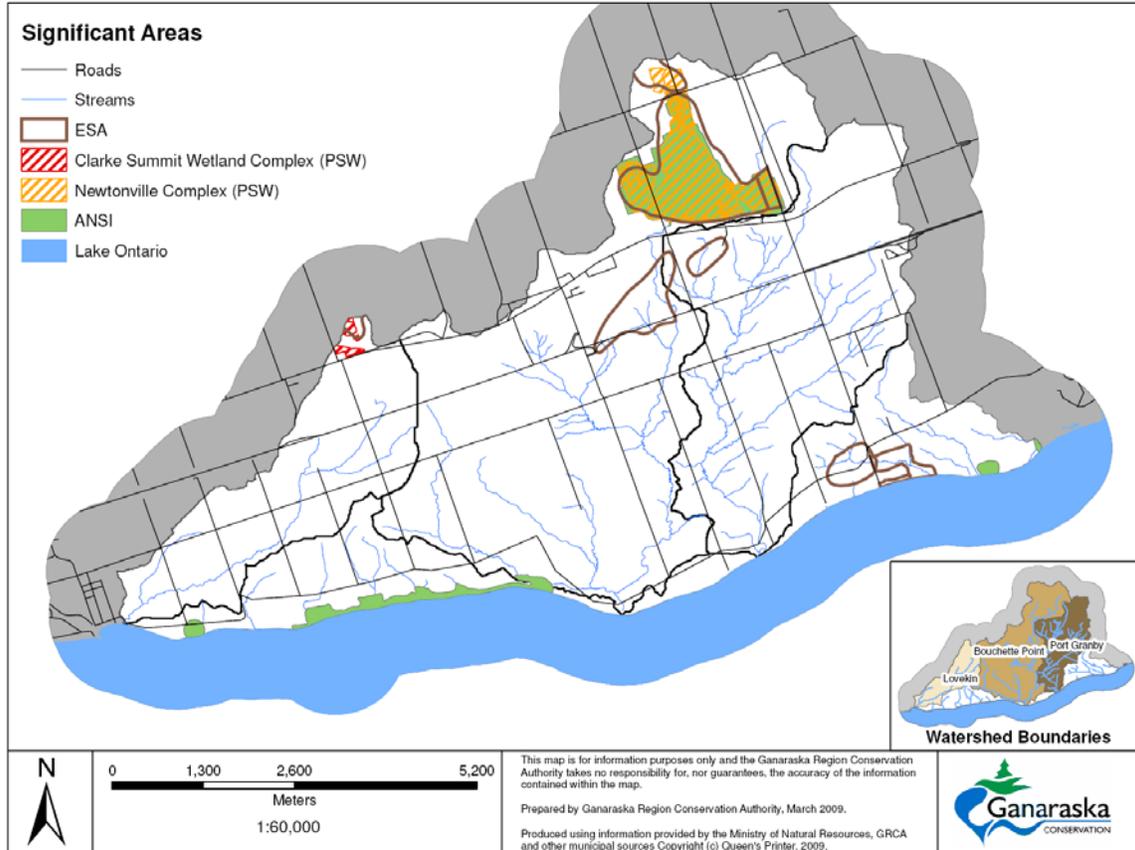


Figure 4.21: Areas of Natural and Scientific Interest



Chapter 5 – CULTURAL CHARACTERISTICS

5.1 PRESENT CULTURAL CHARACTERISTICS

Present settlement patterns, communities and natural resource distribution play an important role shaping surrounding landscapes. This understanding will guide management decisions in the watershed in a localized manner.

5.1.1 Municipal Populations and Growth

Lovekin Creek flows through the Municipality of Clarington (formally Clarke Township) in the Regional Municipality of Durham, while Bouchette Point Creek, and Port Granby Creek flows through Ward 2 of the Municipality of Port Hope (formally Hope Township) in Northumberland County, and the Municipality of Clarington (Figure 5.0). In the regional study area, 5 km² or 9% of the land base has a land use associated with settlement and growth areas (e.g., roads, railways, and urban and rural development), as defined by 2002 Ecological Land Classification mapping. This developed landscape can be further defined in each watershed. Lovekin Creek watershed has the most developed area at 11.5%, followed by Port Granby Creek watershed at 10% and Bouchette Point Creek watershed. Main settlement areas include Newtonville, Port Granby and Newcastle. According to the 2006 Statistics Canada Census, there are approximately 1,300 people living in the regional study area, at a density of 25 people/km².

Both provincial legislation and municipal official plans have defined areas in the Ganaraska Region Conservation Authority that are expected to experience significant growth. However the potential for growth in the three watersheds are limited due to the constraints of the *Greenbelt Act, 2005*, which encompasses the regional study area, with the exception of the Municipality of Port Hope, designated as protected country side.

Nevertheless, given its proximity to the Greater Toronto Area, the Ganaraska Region Conservation Authority watersheds are expected to experience an increase in population. As a result, population projections are necessary to ensure that development and infrastructure occur at a sustainable rate for municipalities and the environment. Planning documents such as growth management strategies consider how much population and employment growth is expected to occur over a specific period of time, and then develop specific strategies for where and how this projected growth is to be accommodated (County of Northumberland 2008). The Municipality of Clarington official plan also directs growth in the municipality (Municipality of Clarington 2007).

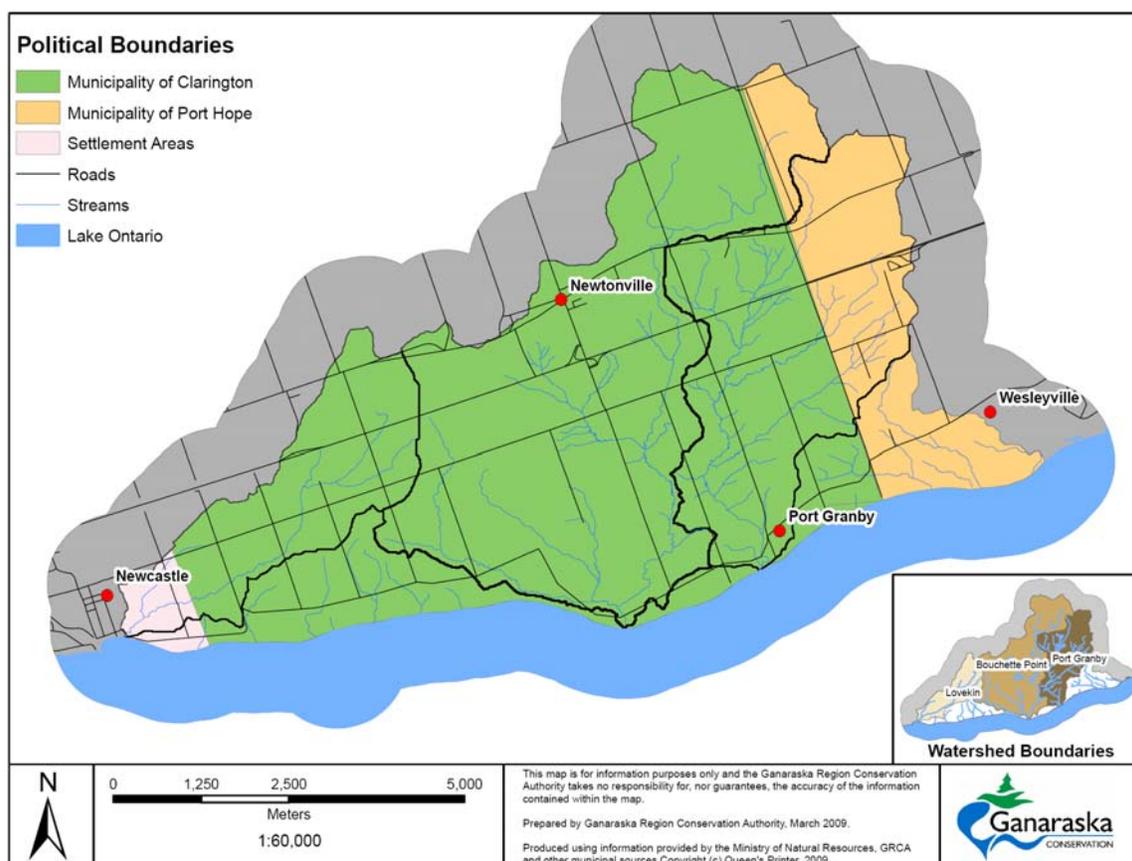


Figure 5.0: Municipalities

Municipality of Port Hope

The Municipality of Port Hope was formed from the amalgamation of the Town of Port Hope and Hope Township in 2001. Today, the urbanized, former Town of Port Hope (Ward 1), and the rural Township of Hope (Ward 2), encompass an area of 279 km² (Statistics Canada 2007; Figure 5.1). Of this, 6.3% of Ward 2 is located in Port Granby Creek, and 9.1% of the regional study area.

The population of the Municipality of Port Hope has increased from 15,605 in 2001 to 16,390 in 2006, with a population density of 58.8 people/km² (Statistics Canada 2007). It is estimated that 77% of the population of the Municipality of Port Hope resides in the urbanized Ward 1 (Strategic Projections Incorporated 2002). The projected population growth in Ward 1 of the Municipality of Port Hope is found in Table 5.0.

Municipality of Clarington

The Municipality of Clarington represents one of the fastest growing communities in Ontario. Ward 4 of the Municipality of Clarington, located in the Ganaraska Region Conservation Authority, includes urban areas (Newcastle and Orono) and surrounding rural areas (Figure 5.2). The Municipality of Clarington's population as a whole grew by 15.2% from 69,834 in 2001 to 77,820 in 2006. This reflects

an annual growth rate of approximately 2.3% and a current density of 127.3 people/km² (Statistics Canada 2007).

The 2006 population of Ward 4 of the Municipality of Clarington, was 13,773 people. The population is expected to grow in Ward 4 to approximately 19,700 in 2016, an increase of 43% from 2006 (Table 5.0). Most of this growth will occur in Newcastle Village (Municipality of Clarington, Personal Communications 2007). The Municipality of Clarington is located within 37.2% of the three watersheds, and 43.4% of the regional study area.

Table 5.0: Municipal population projection

Region	Census Population		Population Projections	
	2006	2011	2016	
Ward 4, Municipality of Clarington ^A	13,773	15,380	19,720	
Municipality of Port Hope ^B	17,039	16,926	16,476	

^A Municipality of Clarington 2007

^B Strategic Projections Inc. 2002

5.1.2 Industrial and Commercial Sector Distribution

Municipal official plans provide information about commercial and industrial developments that are subject to servicing studies and other necessary background information. In rural areas, tourism and agriculture remain the main industries. Figures 5.1 and 5.2 portray the locations of employment, commercial and institutional designated areas, identified tourism sites, agricultural lands and aggregate-licensed areas.

The Municipality of Clarington, in its entirety, has five distinct industrial and business areas. Of these areas, the Newcastle Industrial Area is located in the Ganaraska Region Conservation Authority. The Municipality of Port Hope contains 2,500 acres of industrial land exists and currently 47 manufacturers are located in the municipality (Municipality of Port Hope 2006). Large industrial areas do not exist in the three watersheds; however private, commercial and retail businesses are in operation. These include auto wreckers, landscaping businesses, service stations, tourism, agriculture and recreation facilities.

Commercial use of groundwater and surface water exists. Water use greater than 50,000 litres per day requires a permit from the Ministry of the Environment. Information on the use of water for commercial purposes is found in the Section 3.5.4 of this document.

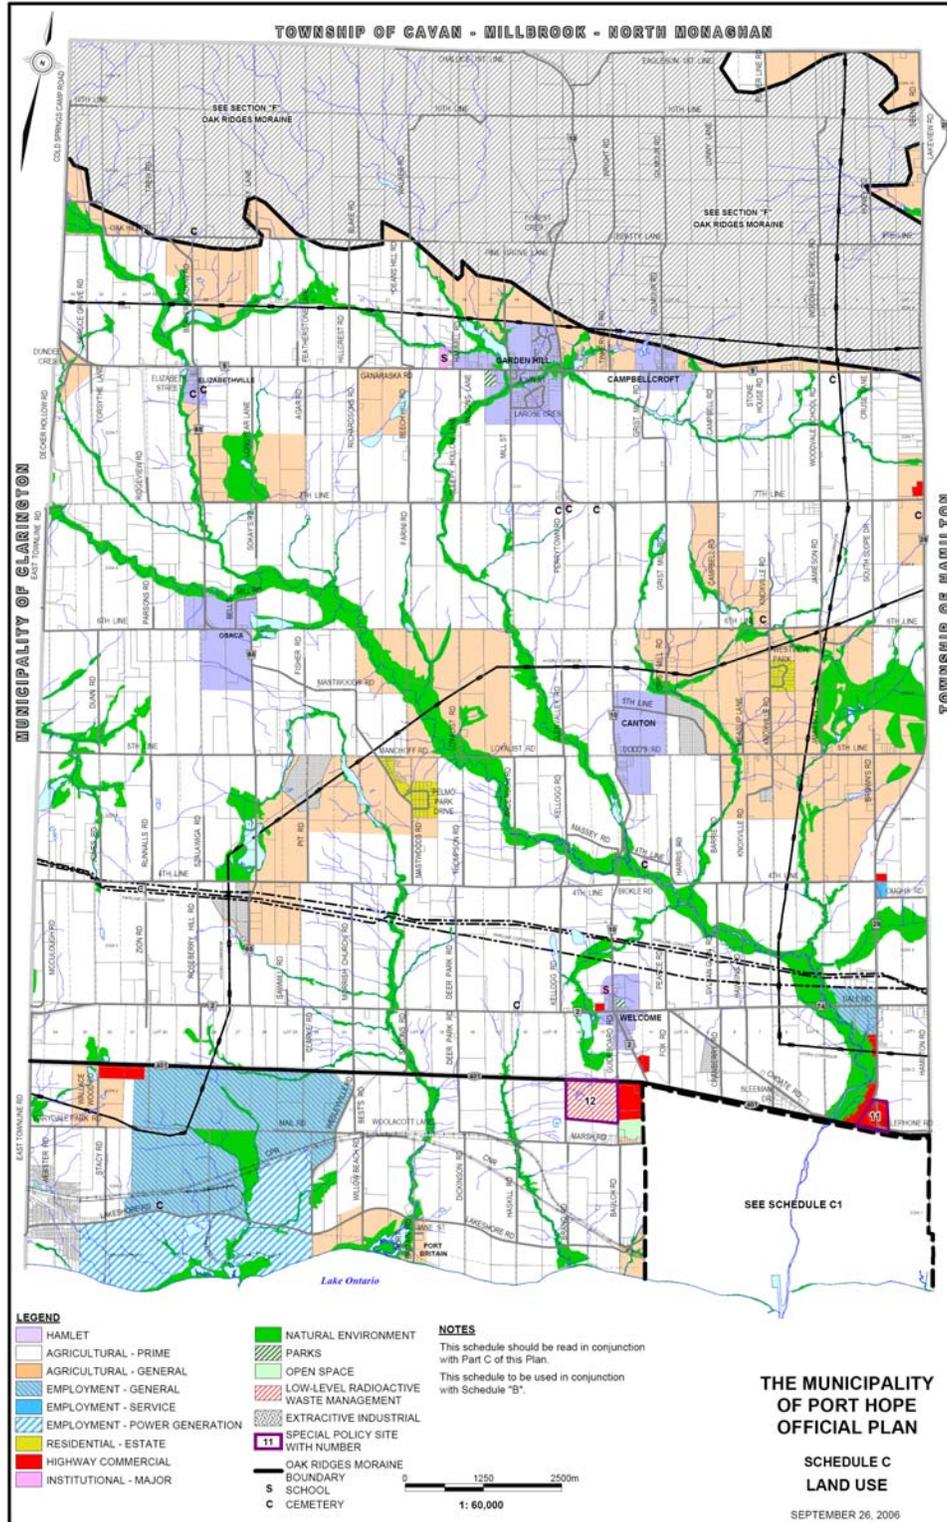


Figure 5.1: Land use in the Municipality of Port Hope

(Municipality of Port Hope 2008)

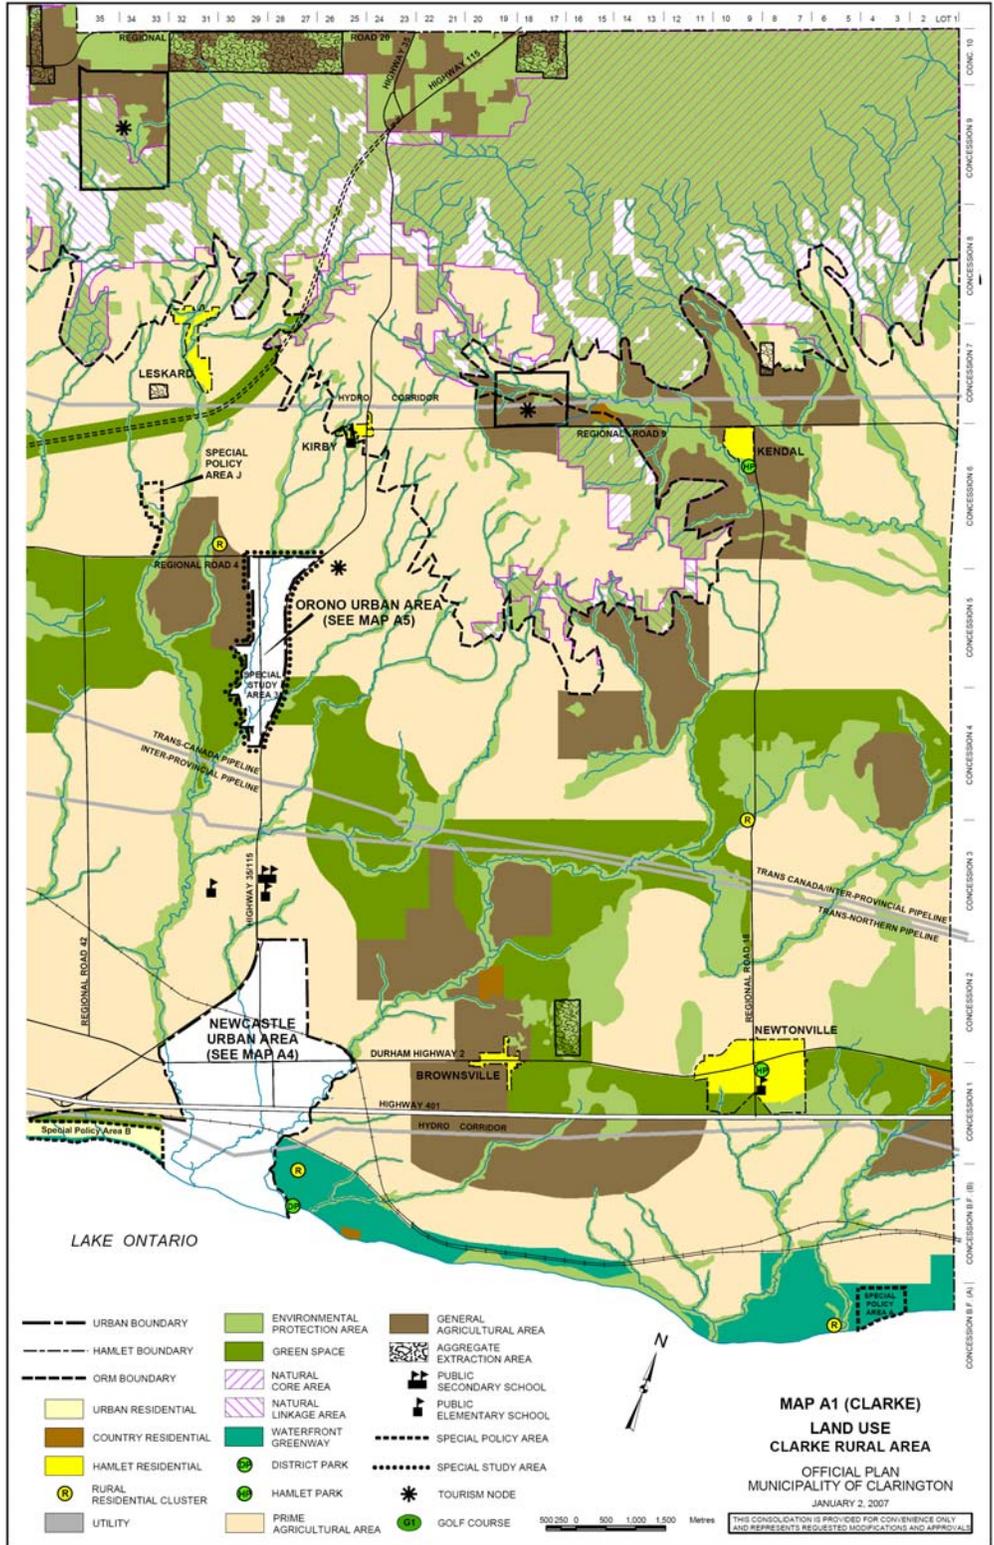


Figure 5.2: Land use in the Municipality of Clarington

(Municipality of Clarington 2007)

5.1.3 Agriculture

Agricultural practices are the dominant land use in the regional study area and the three watersheds (Table 5.1; Figure 5.3). As indicated by Statistics Canada's 2006 census, agricultural production types and intensities vary throughout the Municipality of Clarington³, however crop production prevails over livestock production (Statistics Canada 2008). Table 5.2 contains a breakdown of agricultural land use in the Municipality of Clarington.

Please note that only portions of the Municipality of Clarington and Regional Municipality of Durham are in the Ganaraska Region Conservation Authority. Statistics related to agriculture will be reported at the regional level as many statistical reports are unavailable on a smaller scale. Similarly statistics are not available on a scale smaller than an entire municipality. However, activities are assumed to be constant across the region or municipality.

Table 5.1: Agricultural land use

ELC Defined Agriculture	Watershed			Study Watershed Area
	Lovekin Creek	Bouchette Point Creek	Port Granby Creek	
Intensive	42	44	45	45
Non-intensive	4	5	10	5

Table 5.2: Agricultural land use in 2006

Region	Number of Farms	Land Farmed (Hectare)
Regional Municipality of Durham ^A	1,686	132,212
Municipality of Clarington ^A	437	33,074

A – Only a portion of these areas are found in the Ganaraska Region Conservation Authority and the study watersheds.
(Statistics Canada 2008)

Agricultural Land

In the Regional Municipality of Durham most farm sizes are less than 53 hectares (1,080 farms); 417 farms are between 53 and 161 hectares, and 189 farms are greater than 162 hectares (Statistics Canada 2008). Of the total land farmed (132,212 hectares), 47,479 hectares of farmland are rented or leased in the Regional Municipality of Durham.

³ Statistics are not reported for the Municipality of Port Hope or Northumberland County, given the smaller land base within these municipalities, and the similar local agricultural practices between the Regional Municipality of Durham and Northumberland County.

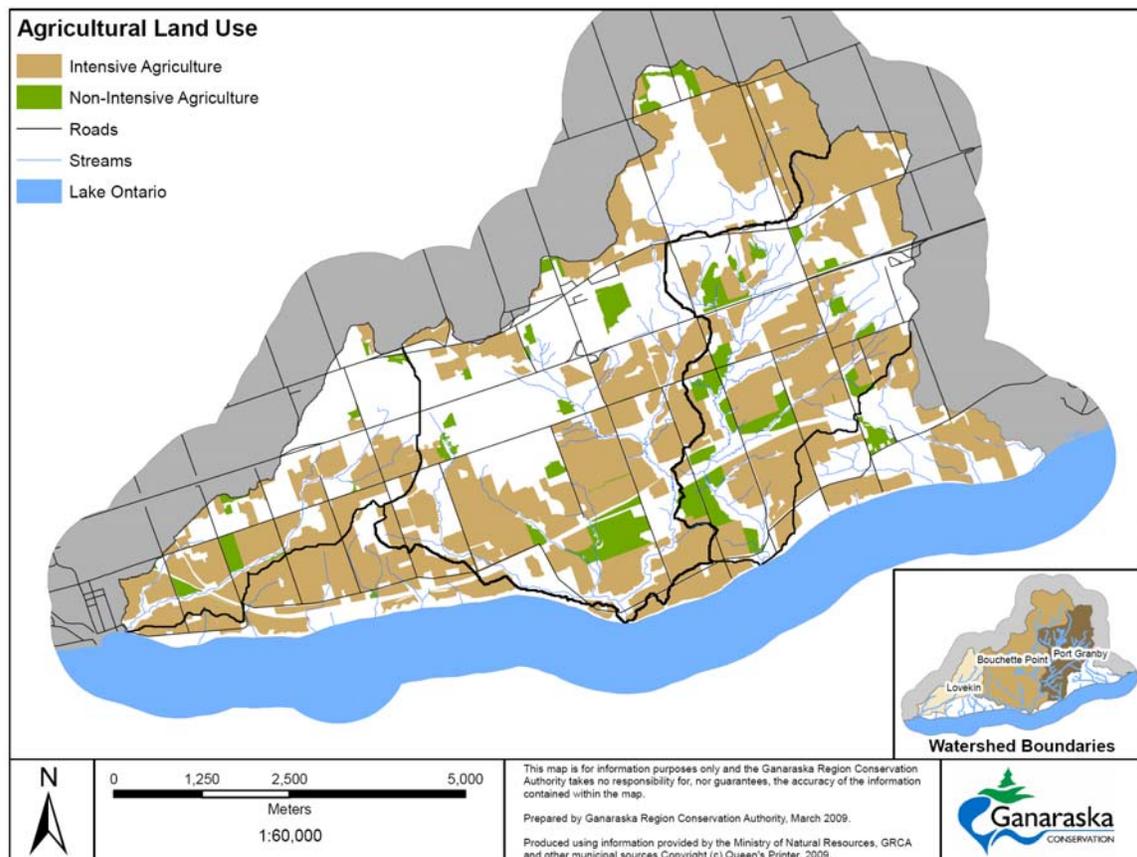


Figure 5.3: Agricultural land

Crops and Livestock

Crops, including produce, are grown on 92,454 hectares of land in the Regional Municipality of Durham. The five most predominant field crops grown in the Regional Municipality of Durham include alfalfa and alfalfa mixtures, grain corn, soybeans, hay and fodder crops (oats, barley, mixed grains and corn silage) and winter wheat (Statistics Canada 2008). Yet, many other field crops are grown throughout the three watersheds.

Produce is also grown in both the Regional Municipality of Durham. A total of 683 hectares of fruit is produced, consisting predominantly of apples, raspberries, strawberries and grapes (Statistics Canada 2008). In 2006, major field vegetable crops grown in the Regional Municipality of Durham included sweet corn, tomatoes, pumpkins, and green or waxed beans. These crops were grown on 848 hectares of land (Statistics Canada 2008). Many other vegetable and fruit varieties are grown throughout the watersheds; there are also floriculture (flowering plants), nursery, and sod production operations.

The Regional Municipality of Durham, in 2006, reported livestock production as dairy and beef cattle, pigs, sheep and poultry (chickens and turkeys) (Statistics Canada 2008). However, other livestock are raised and owned including goats,

horses, and bees (Statistics Canada 2008). Dairy and beef cattle production are the predominant livestock raised in the three watersheds.

Agricultural Conservation Measures

In 2006, 13 farms in the Regional Municipality of Durham were reported as certified organic producers (Statistics Canada 2008) and additional 128 were reported as uncertified organic producers. Soil conservation is widely practised throughout the area, helping to mitigate soil erosion and surface runoff and to increase soil and crop productivity (Table 5.3). Many farmers in the three watersheds also participate in the Environmental Farm Plan and the corresponding funding programs to learn new best management practices and carry out stewardship projects on their lands.

Table 5.3: Farms in 2006 participating in soil conservation practices

Activity	Number of Farms Reporting
Total number of farms reporting	1,686
Crop rotation	917
Winter cover crops	206
Rotational grazing	554
Buffer zones around riparian areas	385
Windbreaks or shelter belts	511
Green manure crops for plough-down	316

* In the Regional Municipality of Durham

Agricultural production in the Ganaraska Region Conservation Authority is ever evolving and shifting. The promise of increased crop prices in relation to ethanol and biodiesel production has seen marginal land being put back to crop production. The recent BSE crisis has seen many cattle producers leave the cattle industry or shift their efforts to cash cropping. Many dairy farmers have sold quota and ceased their dairy operations in the area. Continual shifts in crop markets are causing producers to bring more land into production, and trade concerns are causing farmers to question the stability of grain and oil seed productions across Canada. As a result, a trend to larger and fewer operations is evident in all sectors of the agriculture industry both in Ontario and in the Ganaraska Region Conservation Authority.

5.1.4 Infrastructure

Municipal infrastructure such as roads and bridges, utilities, landfills, water and wastewater services and stormwater management facilities is all necessary in communities. Each utilizes natural resources or effects the natural environment in a different way. Infrastructure requires proper planning, management and development in order to sustain the local community and natural environment.

Transportation and Transmission Line Corridors

Provincial highways, Regional Roads, as well as local roads in the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds are shown in Figure 5.4. Highway 401 and Regional Road 2 are the east-west transportation roads. Major north-south transportation corridors include Regional Road 18. The CPR and CNR rail roads run west to east along the south half of the three watersheds (Figure 5.4). Many hydro corridors and stations exist mainly running in a west-east direction, and along transportation routes (Figure 5.2).

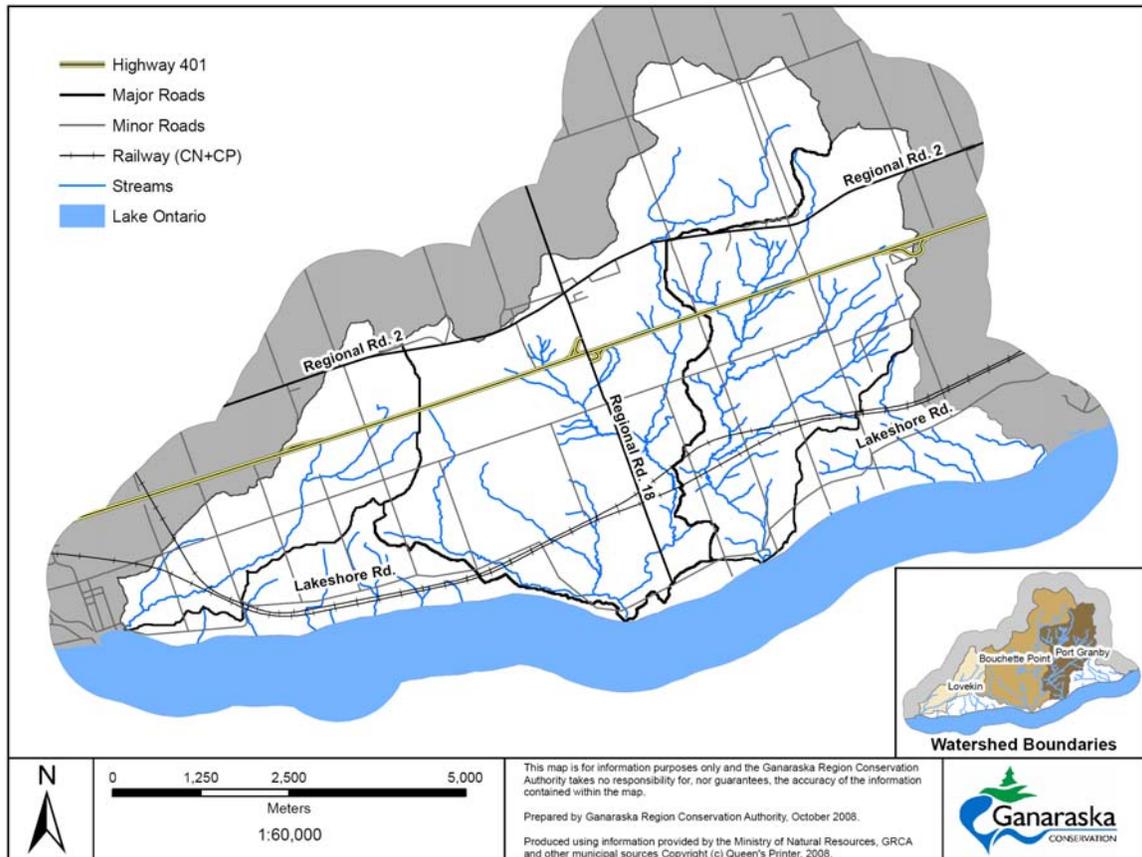


Figure 5.4: Transportation routes

Roads are managed for the safe passage of people and goods. Provincial and municipal road standards direct the construction of roads, maintenance of existing roads and access to roads by private driveways. Roads can cause negative impacts on local streams in regards to stream crossings. Culverts are used to allow for surface water to drain under a road in such a way that running water does not causing road flooding or damage. Many culverts however are aging, and as a result of improper construction, or erosion have become perched.

Perched culverts create a barrier to fish movement, since there is a vertical distance between the stream bottom and the bottom of the culvert at its

downstream end. Currently there are a known two perched culverts in Lovekin Creek, four in Bouchette Point Creek, and three in Port Granby Creek. Roads also restrict the movement of stream channels. Naturally, a stream channel meanders through the creek valley and over time changes its position. With the placement of a culvert, the stream can not move naturally. Some culverts, due to their size, do not allow for the passage of woody debris, a necessary component of a healthy aquatic ecosystem. In addition, stream road crossings, and side roads are easy access point for illegal garbage dumping. This negative social action contaminates the local watershed with household garbage and hazardous waste such as electronics, tires and appliances.

Winter Road Maintenance

Winter maintenance can have negative impacts on surface water and groundwater due to runoff from road salting and material storage locations. The Province of Ontario is responsible for the provincial highways (Highway 401 and Highway 115). The Regional Municipality of Durham is responsible for regional roads, Northumberland County is responsible for county roads, and the Municipality of Clarington and the Municipality of Port Hope is responsible for all other roads.

The Province of Ontario manages its highways in the winter using best practices consistent with those used across North America, and employs the latest winter maintenance technologies (Ontario Ministry of Transportation 2005). Current information is not available to determine salting rates or other application methods of de-icing agents on Highway 401.

The Regional Municipality of Durham is responsible for Regional Road 2 and 18, and follow a salt management plan to ensure that environmental regulations are followed when applying winter material and disposing of snow. No Regional snow and sand dome are located in the three watersheds.

The Municipality of Clarington conducts winter road maintenance using a salt management plan (Municipality of Clarington 2005). The Municipality maintains a sand/salt mixture to between 10-15% ratios. One snow dump exists in Newcastle, with a capacity of 10,000 metric tonnes (Municipality of Clarington 2005).

Landfills

Waste management in the Ganaraska Region Conservation Authority is primarily under the jurisdiction of the upper tier municipalities. There are no active landfills in the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds.

Municipal and Private Water and Wastewater Services

Figure 5.5 shows the municipal water serviced areas in the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds. The Newcastle Water Supply System, operated by the Regional Municipality of Durham draws water from Lake Ontario to be treated for drinking water. The communities of Newcastle and Newtonville are serviced by the Newcastle Water Supply System. This area represents a total serviced population of 7,846 people, however only 433 people in the regional study area are serviced. The rest of the watershed population relies on private water supply wells for drinking water (Figure 5.6). These wells draw water from either overburden or bedrock aquifers.

There are no municipal wastewater treatment plants in the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds. The population rely on private septic systems. Currently, there is no specific data available about the number, concentrations and other information of septic systems.

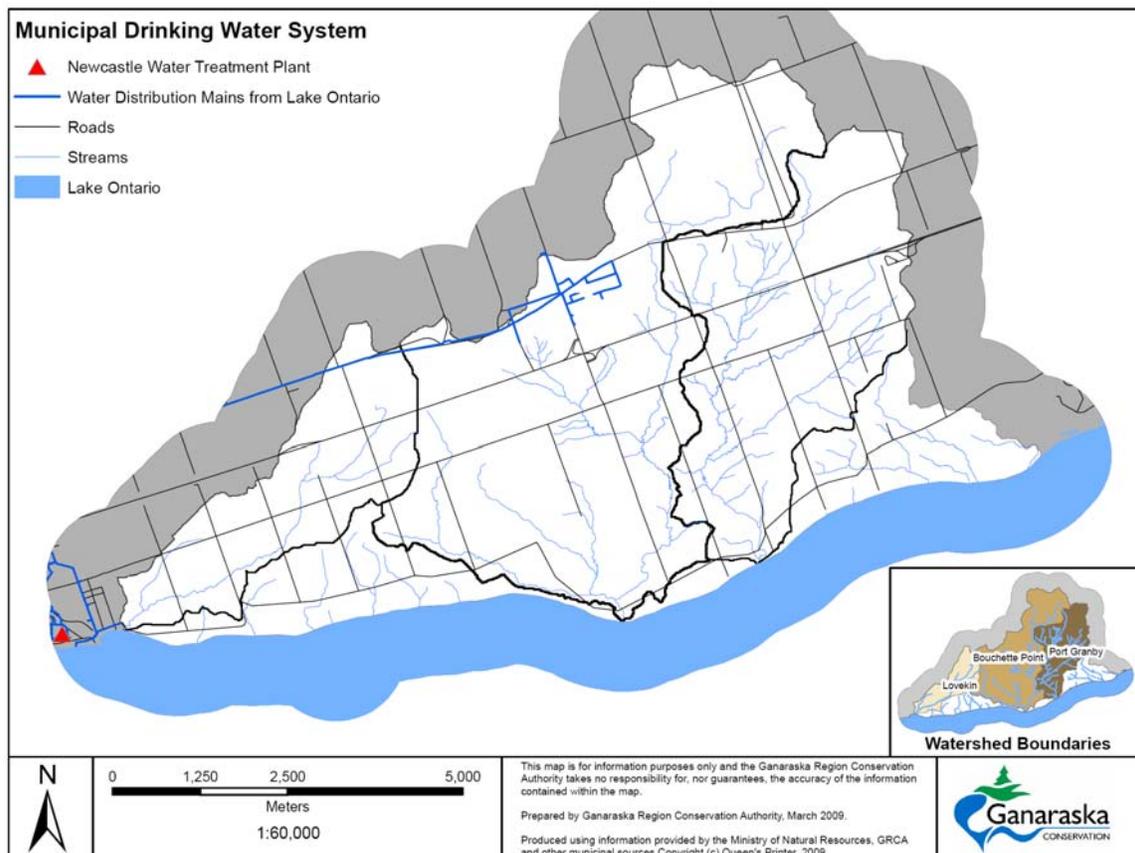


Figure 5.5: Water services

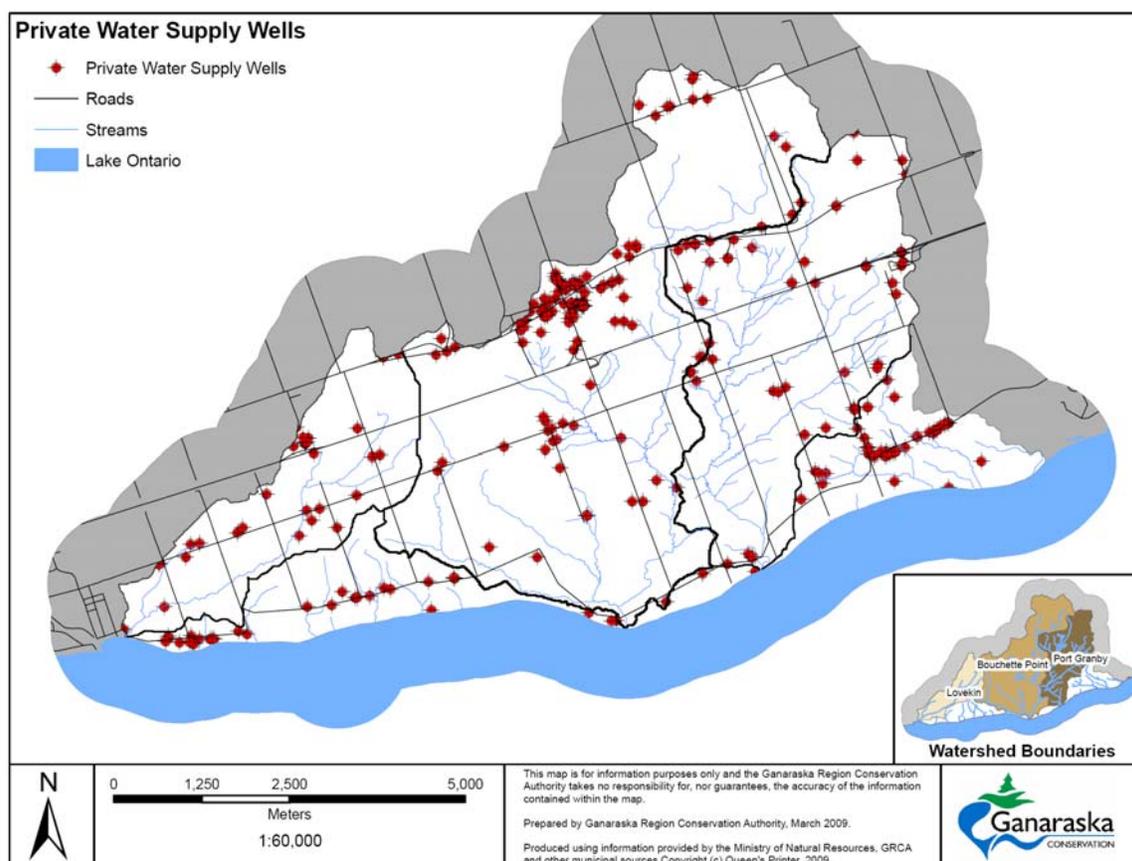


Figure 5.6: Private water wells

Stormwater Management

Stormwater management facilities are normally associated with urban areas of the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds where runoff is directed toward ponds, creeks and infiltration trenches. In rural areas, most of the runoff from roads and residential areas is directed toward ditches and other closed depression areas where higher infiltration rates are anticipated due to high permeability of surficial soils and topography.

Staff at the Ganaraska Region Conservation Authority review all development proposals to ensure they comply with requirements defined locally (through developed plans) and in provincial guidance documents. Both water quantity and quality, which affect aquatic habitats, are considered in any technical review. The general requirements for stormwater management are prescribed by the Ministry of Environment and are defined as follows:

“Stormwater Management is required to mitigate the effects of urbanization on the hydrologic cycle including increased runoff, and decreased infiltration of rain and snowmelt. Without proper stormwater management, reduced baseflow, degradation of water quality, and increased flooding can lead to reduced diversity of aquatic life, fewer

opportunities for human use of water resources, and loss of property and human life.” (Ontario Ministry of the Environment 2003b)

Stormwater ponds are associated with the 401 service stations, however it is unknown if long term management strategies have been developed for these ponds. To meet urban development requirements, several Master Drainage Plans and hydrologic models have been developed for the watersheds and for pond design. Infiltration targets, discharge targets and proposed facilities are defined. Please refer to the Surface Water Analysis section for more detail.

5.1.5 Natural Resources and Uses

The local environment is used by humans for many uses. Economies and communities are built around the extraction and conversion of natural resources for human use. Natural resources can be renewable (e.g., timber or water) or non-renewable (e.g., aggregates, oil and gas).

Aggregate Extraction, Oil and Gas

The Iroquois Plain provides many aggregate resource opportunities (Figure 5.7). A total of 0.02 km² or 0.03% of the regional study area is defined as an aggregate land use by 2002 Ecological Land Classification Mapping. The granular material contained in the Iroquois Plain region grades from fine sand to crushable oversized gravels. The lateral extent and depths of beach deposits are variable. There are no bedrock quarries due to the thickness of the overburden. Due to the nature and the depositional history of the area's geological formations, there is no oil and gas production.

All municipalities have requirements on how new aggregate resource sites are developed. Many conditions are geared towards the protection of the natural environment, agricultural lands and public health and safety. Municipalities also have requirements on how a licensed aggregate is to close. The Ministry of Natural Resources regulates on how an aggregate area is to be rehabilitated.

Forestry

Forestry resources in the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds consist of private forestry operations and the harvest operations for personal use (e.g., firewood and lumber). Forest resource is also used for aesthetic purposes and food (e.g., fruit, maple syrup and nuts). There are no large scale harvest operations in the three watersheds.

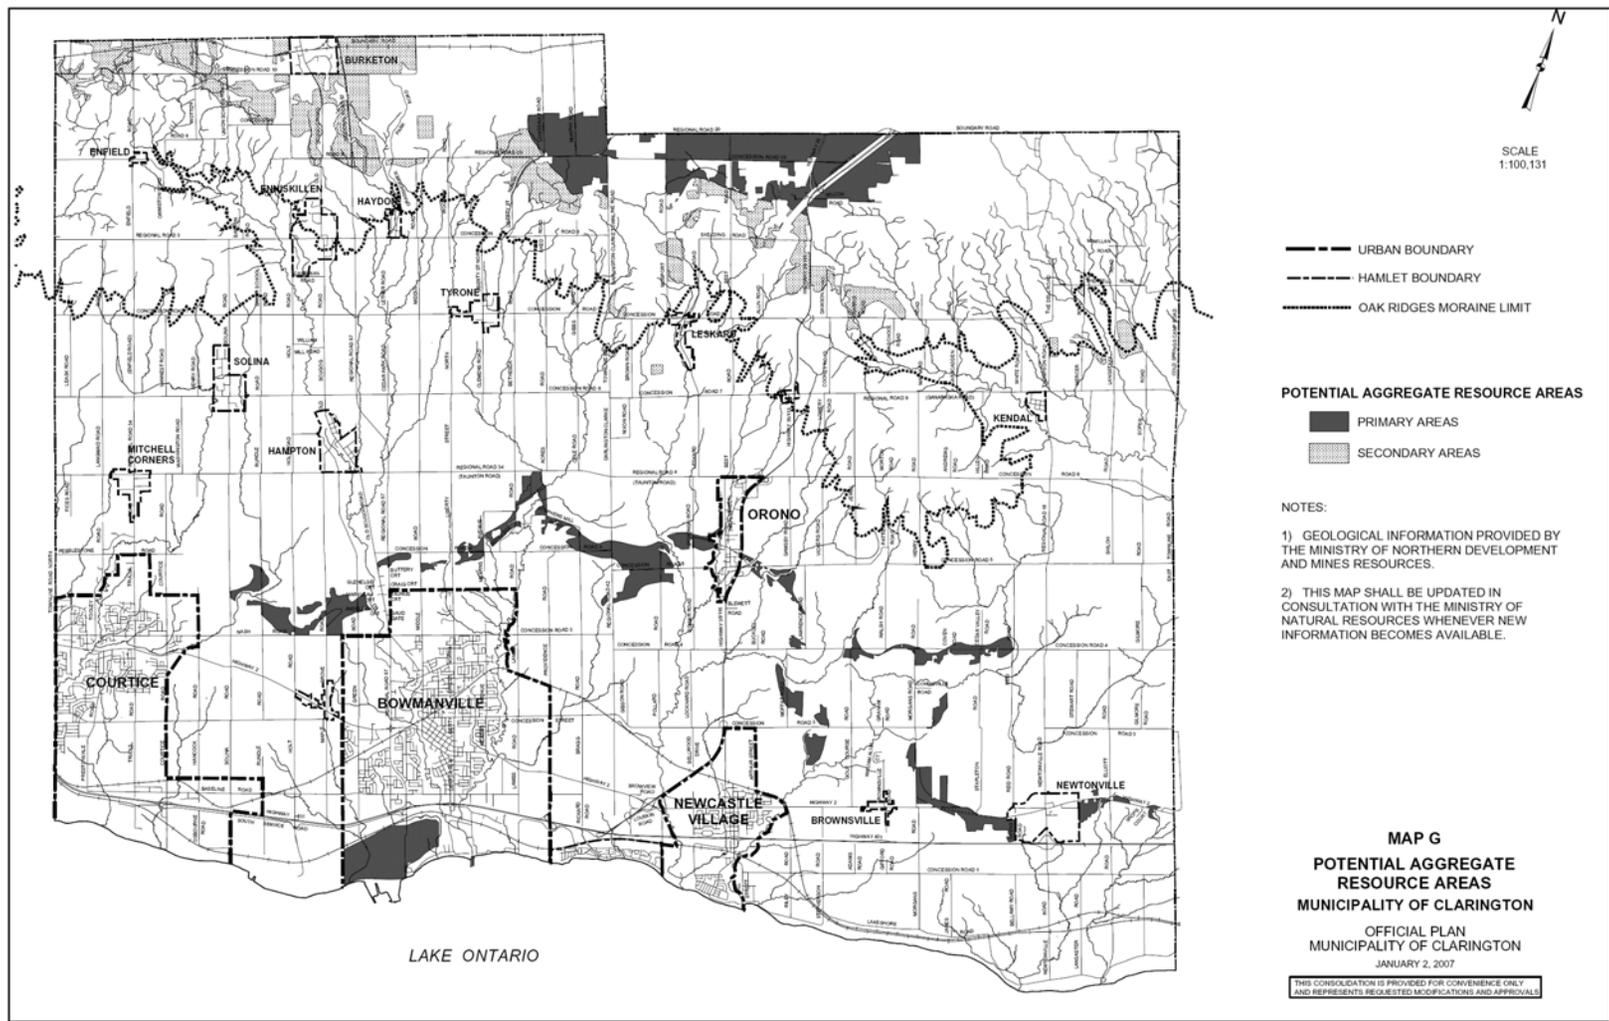


Figure 5.7: Potential aggregate resource areas

5.1.6 Conservation Areas

Certain lands in the Ganaraska Region Conservation Authority are designated as conservation areas. These properties are owned by the Ganaraska Region Conservation Authority and managed in cooperation with local municipalities. These lands are open to the public and have been created to satisfy many objectives. Objectives may include flood protection, mitigation, habitat creation, public education, and recreation. Currently, there are no Conservation Areas in the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds.

5.1.7 Green Spaces

The amount and quality of green space in a watershed directly affects the health of a watershed. Green spaces contain permeable surfaces which can influence the hydrology of the area, especially in urban areas, and can provide habitat suitable to native flora and fauna. However, due to the potential of disturbance in these areas and the continuous use of these areas, invasive and exotic species have a higher potential of becoming established.

The amount and quality of green space available also have a positive relationship with human health and active lifestyles. Having opportunities to enjoy the outdoors is an important component of many people's lives, and can also have an indirect benefit of nature appreciation and increased education in local watersheds and environments. Activities such as hiking, fishing, skiing, cycling, horseback riding, nature appreciation, field sports, golf, and more active activities such as four-wheeling and snowmobiling rely on green space.

For the purposes of this study, green space is defined as parkland and natural areas. Parkland represents areas that have been created for the purpose of providing recreational activities, and include active and passive recreational areas as well as existing and planned/proposed areas. Examples of parkland include municipal parks and playing fields. Natural areas are areas such as forests, wetlands, valleys and stream corridors, which exist or are planned and include naturalized areas. Infrastructure corridors such as hydro, utility and abandoned rail corridors are included in the green space system as these provide passageways (formal or informal) through otherwise impassable areas. A green space system can be created by linking these various areas, providing a continuous green space system that provides opportunities for wildlife movement, increased biodiversity and a connected green space system for the use and enjoyment of citizens.

In the regional study area four parks that are operated and owned by the Municipality of Clarington. These include the Ina Brown Parkette, the Newtonville Cenotaph, the Glen (at the mouth of Lovekin Creek) and the Newtonville Public School recreational facilities.



Chapter 6 - PROVINCIAL CONSIDERATION


6.0 Potential Climate Change Effects

Climate change is defined as a change of climate, which can be attributed directly or indirectly to human activity that alters the composition of the global atmosphere and which is in addition to natural climate variability, observed over comparable time periods (Environment Canada 2006). Climate change is not a localized phenomenon. Occurring across the globe, effects have been felt by many different ecosystems and in many different countries. The *United Nations Framework Convention on Climate Change* (2008) summarizes global events that result from climate change.

- The average temperature of the earth's surface has risen by 0.74°C since the late 1800s. It is expected to increase by another 1.8 to 4°C by the year 2100. Even if the minimum predicted increase takes place, it will be larger than any century-long trend in the last 10,000 years.
- The principal reason for the increase in temperature is a century and a half of activities that have increased the amount of greenhouse gases in the atmosphere, especially carbon dioxide, methane, and nitrous oxide. Such gases occur naturally, keeping some of the sun's warmth from reflecting back into space, and without them the world would be a cold and barren place. But in augmented and increasing quantities they are pushing the global temperature to artificially high levels and altering the climate. Eleven of the last 12 years are the warmest on record, and 1998 was the warmest year.
- The current warming trend is expected to cause extinctions. Numerous plant and animal species, already weakened by pollution and loss of habitat, are not expected to survive the next 100 years. Human beings, while not threatened in this way, are likely to face increased difficulties. Recent severe storms, floods, and droughts, for example, appear to show that computer models predicting more frequent "extreme weather events" are on target.
- The average sea level rose by 10 to 20 cm during the 20th century, and an additional increase of 18 to 59 cm is expected by the year 2100. (Higher temperatures cause ocean volume to expand, and melting glaciers and ice caps add more water.) If the higher end of that scale is reached, large populations will be displaced, coastal cities will disappear, and freshwater supplies will be destroyed for billions of people.
- Agricultural yields are expected to drop in most tropical and sub-tropical regions and in temperate regions too. This will cause drying of continental interiors, such as central Asia, the African Sahel, and the Great Plains of the United States. These changes could cause, at a minimum, disruptions in land use and food supply. And the range of diseases such as malaria may expand.

Similar climate change effects are seen in Canada. According to Environment Canada (2006), a warming trend of +1.2°C has been identified over the last 58

years in Canada (Figure 6.0). The year 2005 had the fifth highest national temperature departure since 1948, and 1998 was the warmest year (+2.5°C) during that period.

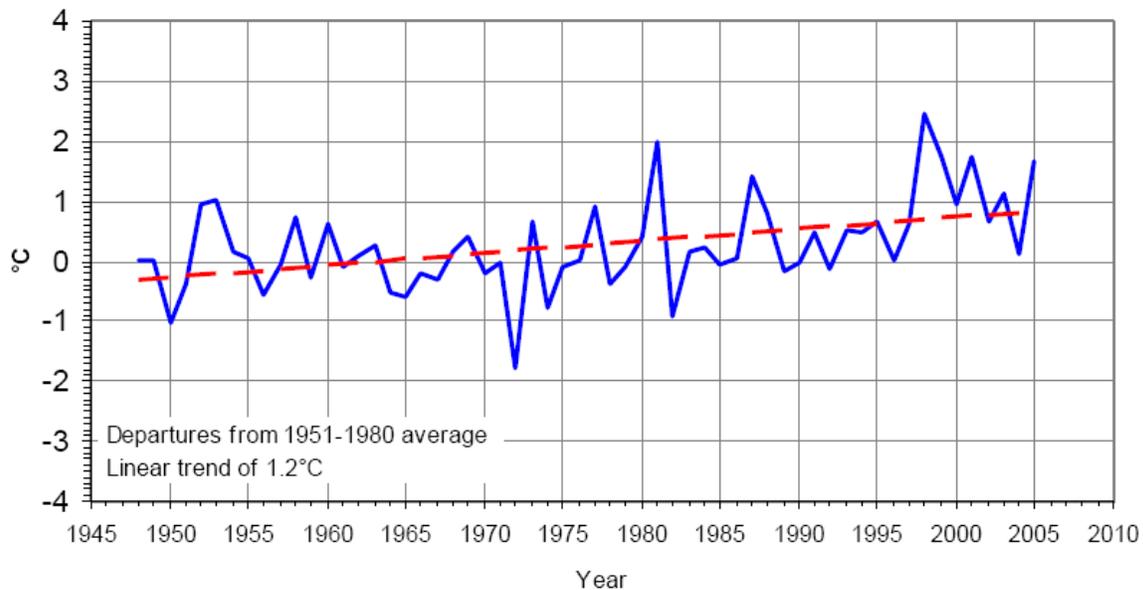

(Environment Canada 2006)

Figure 6.0: Annual Canadian temperature departures and long-term trend, 1948 to 2005

Since 1948, average annual temperatures in Ontario have increased as much as 1.4°C (Chiotti and Lavender 2008). This trend is projected to continue, with the most pronounced temperature increases occurring in winter. Projections also indicate that intense rainfall events, heat waves and smog episodes are likely to become more frequent (Chiotti and Lavender 2008).

Climate change can also be seen locally through the Cobourg STP Environment Canada climate station. Figure 6.1 shows the minimum and maximum daily temperature average of a year, and an annual mean air temperature from 1973 to 2005. There is a significant increase in mean annual temperature since 1973 ($n=31$, $r=0.53$, $p = 0.002$). Although no study on climate change effects to aquatic and terrestrial ecosystems and habitats has occurred, predicted changes in Ontario can be used to understand possible changes, outcomes and stressors. A glimpse at effects on water quantity has been gained through the water budget process (Section 3.5.4) by analyzing current water quantity data with Global Climate Change Models.

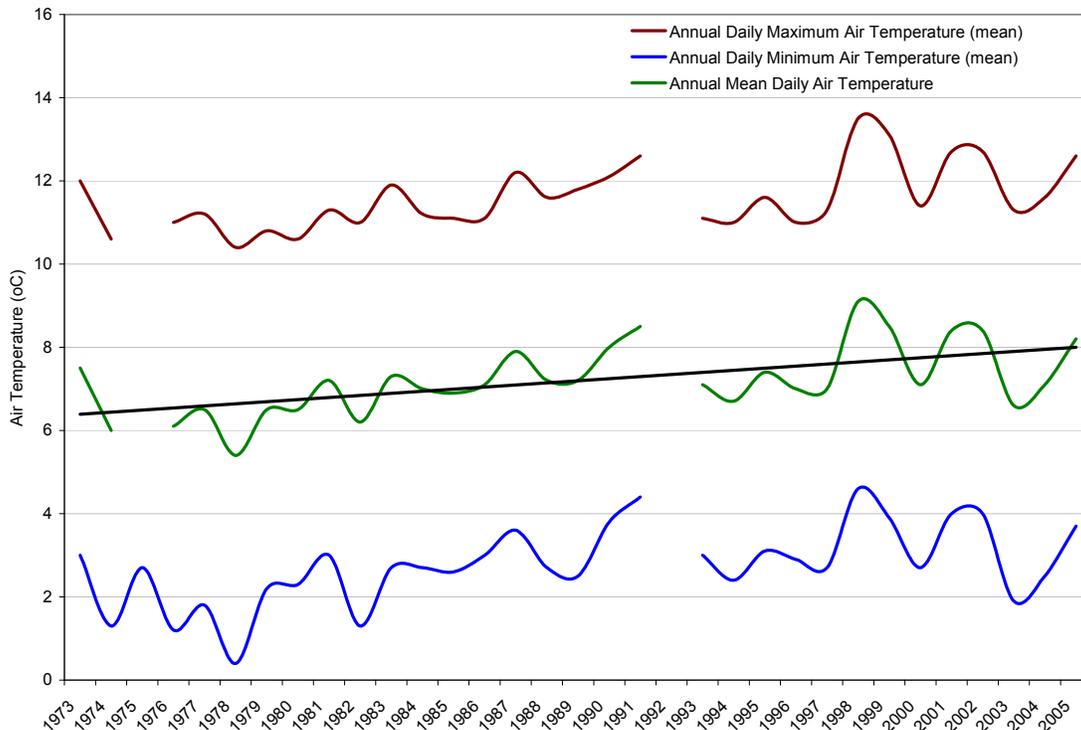


Figure 6.1: Annual average air temperature at the Cobourg STP Environment Canada Station, 1973 to 2005

Within the Great Lakes basin, ecosystems change due to climate change has been noted, and is outlined by Chiotti and Lavender (2008).

- The ice cover season on the Great Lakes has been shortened by about 1 to 2 months during the last 100 to 150 years.
- Nearshore lake temperatures have increased at several locations since the 1920s. These increases are likely associated with extensive algae blooms and invasion of non-native species.
- Shifts in fish communities are expected to occur with declines in coldwater species in the Great Lakes. Warm water species such as bigmouth buffalo and flathead catfish are already being seen more frequently in the Great Lakes basin.
- Additional stressors on already fragile habitats such as coastal wetlands and terrestrial ecosystems may be unable to maintain their functions under increased climate change.

Changes are also expected for water resources in the Great Lakes basin, and will affect both groundwater and all surface water sources (Great Lakes, inland lakes, rivers, streams and ponds). Table 6.0 outlines possible changes to water resources in the Great Lakes basin. Spring freshet and extreme rainfall events will also change the way streams respond under a flood. Increasing winter temperatures will possibly cause the spring freshet to occur earlier and because

of more frequent winter thaws the freshet will likely be lower, reducing the risk of spring flooding (Chiotti and Lavender 2008). In addition, projected increases in the frequency and intensity of extreme rainfall events will result in increased summer flood risks.

Table 6.0: Expected changes to water resources in the Great Lakes Basin

Hydrological parameter	Expected changes in the 21st century, Great Lakes basin
Runoff	<ul style="list-style-type: none"> • Decreased annual runoff, but increased winter runoff • Earlier and lower spring freshet (the flow resulting from melting snow and ice) • Lower summer and fall low flows • Longer duration low flow periods • Increased frequency of high flows due to extreme precipitation events
Lake levels	<ul style="list-style-type: none"> • Lower net basin supplies and declining levels due to increased evaporation and timing of precipitation • Increased frequency of low water levels
Groundwater recharge	<ul style="list-style-type: none"> • Decreased groundwater recharge, with shallow aquifers being especially sensitive
Groundwater discharge	<ul style="list-style-type: none"> • Changes in amount and timing of baseflow to streams, lakes and wetlands
Ice cover	<ul style="list-style-type: none"> • Ice cover season reduced, or eliminated completely
Snow cover	<ul style="list-style-type: none"> • Reduced snow cover (depth, areas, and duration)
Water temperature	<ul style="list-style-type: none"> • Increased water temperatures in surface water bodies
Soil moisture	<ul style="list-style-type: none"> • Soil moisture may increase by as much as 80 percent during winter in the basin, but decrease by as much as 30 percent in the summer and fall

(Chiotti and Lavender 2008)

Many other negative impacts from climate change are predicted to occur (Chiotti and Lavender 2008). Risks to human health will come from temperature stress, air pollution, extreme weather events, vector and rodent borne disease, water borne diseases and Ultraviolet Radiation. Agriculture may see increases in pests and diseases, lower livestock productivity and changes in crop production in relation to growing seasons. Changes to energy consumption and production will occur, as will a decline in shipping and negative impacts on transportation corridors through increased temperature and extreme weather events. Finally, tourism in southern Ontario is predicted to be effected by milder winters and shifts in warm-weather tourism industries.

Climate change presents challenges to Ontario ecosystems, communities and economic structure. Although these changes and their magnitude will be variable across the province, change will occur. As a result, ecosystems will need to adapt in order to survive increases in temperature, extreme weather and stresses to habitats (i.e., increases in invasive species and disease). The key to local ecosystems, flora and fauna, as well as humans handling changes in climate, is resilience and the ability to adapt. By preserving, enhancing and properly managing local watersheds, resilient and healthy ecosystems will be able to better adapt to changes presented from a changing climate and many other current and future stressors.

6.1 Drinking Water Source Protection

The Ontario government has given Royal Assent to the *Clean Water Act, 2006*, which is aimed at protecting sources of municipal drinking water as part of the government's overall commitment to human health and the environment. A key focus of the legislation is the production of locally developed, science based assessment reports and protection plans (Ontario Ministry of the Environment 2007b). The need for legislation such as the *Clean Water Act* was spurred by the tragic events that occurred in Walkerton, Ontario in May 2000 when seven people died and thousands became sick from drinking municipal water that was contaminated with *E. coli*.

Assessment reports and protection plans will be written for specific planning regions, known as source protection regions or areas. The local source protection region, which includes the Ganaraska Region Conservation Authority is the Trent Conservation Coalition Source Protection Region. Under the *Clean Water Act*, the Ganaraska Region Conservation Authority becomes a source protection area in the TCC SPR.

The Trent Conservation Coalition Source Protection Region (TCC SPR) is a grouping of five Conservation Authorities that comprise the Trent River watershed. The TCC SPR stretches from Algonquin Provincial Park in the north, to Lake Ontario and the Bay of Quinte in the south, and includes the Trent River watershed, the Ganaraska River watershed, Wilmot Creek watershed, Cobourg Creek watersheds and several smaller watersheds that empty into Lake Ontario and the Bay of Quinte. The Source Protection Region is approximately 15,000 km².

Five Conservation Authorities comprise the TCC SPR (beginning from the northwest and moving in a general clockwise direction).

- Kawartha Conservation
- Otonabee Conservation
- Crowe Valley Conservation Authority
- Lower Trent Conservation
- Ganaraska Region Conservation Authority.

For the purpose of drinking water source protection planning, the TCC Source Protection Region has been enlarged beyond conservation authority jurisdiction to include the entire Trent River watershed. This includes the Gull and Burnt River watersheds, lying mainly in Haliburton County, as well as additional watershed areas draining southward to the Kawartha Lakes in the northern half of Peterborough County. Approximately 4,171 km² outside of conservation authority jurisdiction is included in the Trent Conservation Coalition Source Protection Region.

Although source protection plans will be created for a source protection region, the planning area of interest is municipal surface water intake zones, wellhead protection areas, significant groundwater recharge areas and highly vulnerable aquifers. These areas have been defined using defensible science based methods. The Newcastle Water Supply System have been studied as part of drinking water source protection and the Orono Water Supply System has had wellhead protection zones delineated for the purpose of protecting the sources of the municipal water supply. See section 3.3.2 for more detail on this study.

While the Lovekin Creek, Bouchette Point Creek and Port Granby Creek Watershed Plan process is taking place, work under the *Clean Water Act* framework will be occurring. A 24-member source protection committee will prepare terms of reference, an assessment report and a source protection plan for the Ganaraska Region Source Protection Area. The committee membership represents municipalities, farmers, small business representatives and a range of other stakeholders in the TCC SPR. Through the source protection committee, work will be completed to identify, assess and address risks to drinking water win municipal sources (i.e., wellhead and intake protection areas). Stakeholders such as local property owners can also participate through a number of different mechanisms.

Specifically, the terms of reference set out who is responsible for carrying out different activities. The terms of reference include strategies to consult with potentially affected property owners to involve the public and resolve disputes. While the committee creates an assessment report, the committee will identify threats, issues and concerns in the planning region. This knowledge will be represented as implementation actions within the source protection plan.

As described by the Ontario Ministry of the Environment (2007b), source protection plans will generally be implemented through existing regulatory requirements or approvals, zoning by-laws, official plan amendments, education or voluntary initiatives. Source protection committees may decide that existing programs and activities, voluntary or otherwise, may not be enough to address some significant threats to municipal drinking water supplies.

If a scientific assessment shows that an activity poses a significant risk to a drinking water source, an approved source protection plan may restrict or limit

certain activities on properties located in designated wellhead protection areas and intake protection zones. Activities that pose a significant risk to drinking water sources may be prohibited or may require a risk management plan before they can be carried out.

The source protection plan may be very similar to the Lovekin Creek, Bouchette Point Creek and Port Granby Creek Watershed Plan, but will differ in the fact that the source protection plan addresses issues surrounding municipal water sources, whereas the watershed plan will address watershed-wide ecosystem based concerns and issues. Plan implementation may occur simultaneously in some instances, when the action will protect similar resources or environmental features and achieve similar outcomes. While working with municipalities, the Ganaraska Region Conservation Authority will strive to reduce duplication between the plans and the resultant implementation tools and resources.

6.2 Lake Ontario

Lake Ontario is the final receiving lake in the Great Lake drainage basin, before water flows through the St. Lawrence River to the Atlantic Ocean (Figure 6.2). Lake Ontario is bounded by the Province of Ontario in Canada, and New York State and Pennsylvania State in the United States of America (Figure 6.3). With a total drainage area to Lake Ontario of 64,030 km², New York State has the largest drainage area to Lake Ontario (35,000 km²), followed by Ontario (29,100 km²) and Pennsylvania State (300 km² – upper Genesee River).

Lake Ontario is the smallest of the Great Lakes, with a surface area of 18,960 km² (7,340 square miles), but it has the highest ratio of watershed area to lake surface area. It is relatively deep, with an average depth of 86 metres and a maximum depth of 244 metres second only to Lake Superior (Environment Canada et al. 1998). Approximately 80% of the water flowing into Lake Ontario comes from Lake Erie through the Niagara River. The remaining flow comes from Lake Ontario basin tributaries (14%) and precipitation (7%). About 93% of the water in Lake Ontario flows out to the St. Lawrence River; the remaining 7% leaves through evaporation (Environment Canada et al. 1998).

In 1987, the governments of Canada and the United States made a commitment, as part of the *Great Lakes Water Quality Agreement*, to develop a Lakewide Management Plan for each of the five Great Lakes. The *Lake Ontario Lakewide Management Plan* is a binational, cooperative effort to restore and protect the health of Lake Ontario by reducing chemical pollutants entering the lake and addressing the biological and physical factors impacting the lake (Environment Canada et al. 2008).



(Great Lakes Information Network 2008)

U.S. Army Corps of Engineers, Detroit District

Figure 6.2: Great Lakes drainage basin



(Environment Canada et al. 2008)

Figure 6.3: Lake Ontario drainage basin

Environment Canada et al. (2008) acknowledges the importance of watershed management to the health of Lake Ontario. A binational work plan for 2007 to 2011 recommends working with Conservation Authorities within the Lake Ontario basin to identify and promote watershed management strategies (Environment Canada et al. 2008) that will benefit and enhance Lake Ontario.

The Lake Ontario fishery is dependent on its tributaries for spawning and rearing habitat. Despite the trend of resource exploitation in the 1800s, there was a shift in resource management in the mid 1900's when the *Great Lakes Water Quality Agreement* (between the United States and Canada) was signed in 1972. This agreement sparked a renewed interest in restoring the Lake Ontario ecosystem (Smith 1995). By the mid 1900's few sports fishing opportunities existed and non-native salmonids were introduced in an attempt to restore biological balance and promote the creation of a fishery in Lake Ontario. Fish stocking and sea lamprey control conducted since the 1970s resulted in an increased abundance and diversity of fish (Smith 1995).

It is envisioned that the Lovekin Creek, Bouchette Point Creek and Port Granby Creek watersheds background document and watershed plan, as well as the Lovekin Creek, Bouchette Point Creek and Port Granby Creek Fisheries Management Background Document and Management Plan will provide needed information into the Lake Ontario Lakewide Management Plan, and management initiatives carried out on a watershed scale will benefit the health and sustainability of Lake Ontario.

7.0 REFERENCES

- AECOM. 2009. Groundwater Vulnerability Assessment – TCC Source Protection Region. AECOM, Guelph, ON.
- Agriculture and Agri-Food Canada and Ontario Ministry of Agriculture and Food. Unknown Date. Best management practices: Buffer Strips.
- An, Y-J., Campbell, D.H. Breidenbach, G.P. 2002. *Escherichia coli* and total coliforms in water and sediments at lake marinas. *Environment Pollution*, **120**:771-778.
- Aqua Resource Inc. 2004. A Scientific Process for Lifting Ontario's Permit to Take Water Moratorium.
- Belden, H and Company. 1974. Illustrated Historical Atlas of the Counties of Northumberland and Durham, Ontario, 1878. Maracle Press, Oshawa, Ontario.
- Bowlby, J.N. 2003. *Unpublished*. A definition for Coldwater Stream. Ontario Ministry of Natural Resources.
- Brookfield, M.E., Gwyn, Q.H.J. and Martin, I.P. 1982. Quaternary sequences along the north shore of Lake Ontario: Oshawa-Port Hope. *Canadian Journal of Earth Sciences*, **19**:1836-1850.
- Cadman, M.D., Sutherland, D.A., Beck, G.G., Lepage, D. and Couturier (eds.). 2007. Atlas of the Breeding Birds of Ontario, 2001-2005. Bird Studies Canada, Environment Canada, Ontario Field Ornithologists, Ontario Ministry of Natural Resources, and Ontario Nature. Toronto, Ontario.
- CAMC-YPDT. 2009. Trent Source Water Protection: Recharge Study (CAMC-YPDT Report #01-2009). Conservation Authorities Moraine Coalition (CAMC) and York-Peel-Durham-Toronto (YPDT) Groundwater Management Study.
- Canadian Council of Ministers of the Environment. 2006. Canadian Water Quality Guidelines for the Protection of Aquatic Life. Environment Canada. Ottawa, Ontario, Canada.
- Canadian Council of Resource and Environment Ministers. 1987. Canadian Water Quality Guidelines. Prepared by the Task Force on Water Quality Guidelines. Environment Canada. Ottawa, Ontario, Canada.
- Carpenter S.R., Caraco, N.F., Correll, D.L., Howarth, R.W., Sharpley, A.N., and Smith, V.N. 1998. Non-point pollution of surface waters with phosphorous and nitrogen. *Ecological Applications*, **8**: 559-568.
- Chapman, L.J. and Putnam, D.F. 1966. The Physiography of Southern Ontario. Second Edition. University of Toronto Press, Toronto, Ontario.

Chiotti, Q and Lavender, B. 2008. Ontario: *in* From impacts to Adaptation: Canada in a changing climate 2007, edited by D.S. Lemmen, F.J. Warren, J. Lacroix and E. Bush; Government of Canada, Ottawa, Ontario.

Colburn, E.A. 2005. Vernal Pools: Natural History and Conservation. McDonald and Woodward Books.

Conservation Ontario. 2003. Watershed Management in Ontario: Lessons Learned and Best Practices. Newmarket, Ontario.

County of Northumberland. 2008. Growth Management Strategy for Northumberland County and its Member Municipalities, Newsletter 1. County of Northumberland, Ontario.

Csuros, M. 1994. Environmental Sampling and Analysis for Technicians. CRC Press LLC, Boca Raton, Florida.

Cushing, C.E. and Allan, J.D. 2001. Streams their ecology and life. Academic Press, San Diego, California, U.S.A.

De Loë, R. 2002. Agriculture Water Use in Ontario by Watershed: Estimates for 2001.

Department of Fisheries and Oceans Canada. 2000. Effects of sediment on fish and their habitat. DFO Pacific Region. Habitat Status Report 2000/01E.

Earthfx Incorporated. 2006. Groundwater Modeling of the Oak Ridges Moraine Area. CAMC-YPT Technical Report #01-06.

Environment Canada. 2005. Guidelines at a Glance: Nitrate. National Guidelines and Standards Office. Ottawa, Ontario.

Environment Canada. 2005b. Guidelines at a Glance: Phosphorus. National Guidelines and Standards Office. Ottawa, Ontario.

Environment Canada. 2005c. How Much Habitat is Enough? A Framework for Guiding Habitat Rehabilitation in Great Lakes Areas of Concern (Second Edition). Environment Canada, Canadian Wildlife Service, Toronto, Ontario.

Environment Canada. 2006. Canada's Fourth National Report on Climate Change: Actions to Meet Commitments under the United Nations Framework Convention on Climate Change. Ottawa, Ontario.

Environment Canada, United States Environmental Protection Agency, Ministry of the Environment, New York State department of Environmental Conservation. 1998. Lake Wide Management Plan for Lake Ontario, Stage 1: Problem Definition. Environment Canada, Ottawa, Ontario.

Environment Canada, United States Environmental Protection Agency, Ministry of the Environment, New York State department of Environmental Conservation. 2008. Lake Ontario Lake Wide Management Plan Status. Environment Canada, Ottawa, Ontario.

Eyles, N. 2002. Ontario Rocks: three billion years of environmental change. Fitzhenry & Whiteside, Markham, Ontario.

Fahrig, L. 2001. How much habitat is enough? *Biological Conservation* 100:65-74

Fischer, R.A. and Fischenich, J.C. 2000. Design Recommendations for Riparian Corridors and Vegetated Buffer Strips. US Army Engineer Research and Development Center, Environmental Laboratory, Vicksburg, MS.

Forman, R.T. 1995. *Land Mosaics: The Ecology of Landscapes and Regions*. Cambridge University Press, New York.

Ganaraska Region Conservation Authority. 1983. *Watershed Plan Resource Inventory*. Ganaraska Region Conservation Authority, Port Hope.

Ganaraska Region Conservation Authority. 2002. *Ecological Land Classification Mapping*. Updated in 2006. Ganaraska Region Conservation Authority, Port Hope.

Ganaraska Region Conservation Authority. 2005. *Terms of Reference Lovekin Creek, Bouchette Point Creek and Port Granby Creek Watershed Plan*. Updated in 2009. Ganaraska Region Conservation Authority, Port Hope.

Ganaraska Region Conservation Authority. 2005b. *Terms of Reference Regulation Limits, Section 28: Generic Regulations*. Ganaraska Region Conservation Authority, Port Hope.

Ganaraska Region Conservation Authority. 2007. *Conceptual Understanding - Water Budget: Watersheds Draining to Lake Ontario, Final Draft Report Version 2.5*, September 27, 2007.

Ganaraska Region Conservation Authority. 2007b. *Terms of Reference, Ganaraska Region Water Response Team*. Revised December 2005, Updated June 2007.

Ganaraska Region Conservation Authority. 2008. *Tier 1 Water Budget and Stress Assessment. Version 1.0 Draft*. Ganaraska Region Conservation Authority, Port Hope, Ontario.

Gartner Lee Limited. 1976. *Hydrological Terrain Study Wilmot and Graham Creeks* Ganaraska Region Conservation Authority for M.M. Dillon Limited. Project Number 75-63.

Golder Associates Limited. 2007. *Environmental Assessment Study Report for the Port Granby Project, Revision 1*. Golder Associates Limited, Mississauga, Ontario.

Great Lake Information Network. 2008. Mapping and GIS [online]. <http://www.great-lakes.net/> [accessed April 2008].

Groves, C.R. 2003. Drafting a Conservation Blueprint: A Practitioner's Guide to Planning for Biodiversity. Island Press, Washington D.C.

HACH Company. 1989. Water Analysis Handbook. HACH Company. Loveland, Colorado, U.S.A.

Harding, J.S., Benfield, E.F., Bolstad, P.V., Helfman, G.S. and Jones III, E.B.D. 1998. Stream biodiversity: the ghost of land use past. *Proceedings of the National Academy of Sciences* 95: 14843-14847.

Hinton, M.J. 2005. Methodology for Measuring the Spatial Distribution of Low Streamflow within Watersheds. Geological Survey of Canada. Open File 4891.

Hoffman, D.W. 1974. The Soils of Northumberland County. Ontario Agricultural College, University of Guelph, Guelph, Ontario.

Hudson, N. 1981. Soil Conservation. Batsford Academic and Educational, London.

Hunter, M.L. 1990. Wildlife, Forests, and Forestry. Prentice Hall Career and Technology. Upper Saddle River, New Jersey.

Jagger Hims Limited. 2007. Groundwater Study Creighton Heights and Camborne Municipal Wellfields, Township of Hamilton. Prepared for Township of Hamilton and Ganaraska Region Conservation Authority. File # 061851.00

Jones, C., Somers, K.M., Craig, B. and Reynoldson, T.B. 2005. Ontario Benthos Biomonitoring Network Protocols Manual, Version 1.0. Ontario Ministry of the Environment, Dorset, Ontario.

Kimmins, J.P. 1996. Forest Ecology, 2nd Edition. Prentice Hall Inc., Toronto.

Larson, B.M., J.C. Riley, E.A. Snell and H.G. Godschalk. 1999. The Woodland Heritage of Southern Ontario. Federation of Ontario Naturalists, Toronto.

Lee, H. Bakowsky, W., Riley, J, Bowles, J, Puddiser, M, Uhlig, P, McMurray, S. 1998. Ecological Land Classification for Southern Ontario. SCSS Field Guide FG-02. Ministry of Natural Resources.

Maloney, K.O., Feminella, J.W., Mitchell, R.M., Miller, S.A. Mulholland, R.J. and Houser, J.N. 2008. Landuse legacies and small streams: identifying relationships between historical land use and contemporary stream conditions. *Journal of the North American Benthological Society* 27(2): 280-294.

Martin, N., McGillis, D.S. and Milne, C. 1986. Gore's Landing and The Rice Lake Plains. Heritage Gore's Landing, Haynes Printing, Cobourg.

Mayer, P.M., Reynolds, S.K., McCutchen, M.D. and Canfield, T.J. 2006. Riparian buffer width, vegetation cover, and nitrogen removal effectiveness: A review of current science and regulations. EPA/600/R-05/118. Cincinnati, OH, U.S. Environmental Protection Agency.

Mayer, T., Snodgrass, W.J. and Morin, D. 1999. Spatial Characterization of the occurrence of road salts and their environmental concentrations and chloride in Canadian surface waters and benthic sediments. *Water Quality Research Journal of Canada*, **34**: 545-574.

McCracken, J.F., 2005. Where Bobolinks Roam: The Plight of North America's Grassland Birds. *Biodiversity* Volume 6, Number 3.

M.M. Dillon Limited. 1977. Newcastle Flood Line Mapping. Toronto, Ontario.

Moore, R.D., Spittlehouse, D.L. and Story, A. 2005. Riparian Microclimate and Stream Temperature Response to Forest Harvesting; A Review. *Journal of the American Water Resources Association*. **41**(4):813-834.

Morrison Environmental Limited. 2004. Trent Conservation Coalition (TCC), Municipal Groundwater Study, Ganaraska Region Conservation Authority Report. Morrison Environmental Ltd.

Municipality of Clarington. 2005. Municipality of Clarington Salt Management Plan.

Municipality of Clarington. 2007. Municipality of Clarington Official Plan. Municipality of Clarington.

Municipality of Port Hope. 2006. Economic Development/Industry [online]. Available from: http://www.porthope.ca/departments/business/econ_dev/industry.htm [cited May 18, 2006].

Municipality of Port Hope. 2008. Municipality of Port Hope Official Plan. Municipality of Port Hope.

Natural Heritage Information Centre. 2008. Species Information [online]. Available from URL:<http://nhic.mnr.gov.on.ca> [Cited January 2009].

Ontario Genealogy. Unknown Date. Ontario (Upper Canada) Maps [online]. Available from URL: <http://ontariogenealogy.com/ontariomaps.html> [Cited May 9, 2008].

Ontario Ministry of Environment and Energy and Ontario Ministry of Natural Resources. 1993. *Watershed Management on a Watershed Basis: Implementing an Ecosystem Approach*. Queen's Printer for Ontario.

- Ontario Ministry of Environment and Energy. 1999. Provincial Water Quality Objectives. Toronto, Ontario.
- Ontario Ministry of Municipal Affairs and Housing. 2002. *Oak Ridges Moraine Conservation Plan*. Queen's Printer for Ontario.
- Ontario Ministry of Municipal Affairs and Housing. 2005. *Provincial Policy Statement*. Queen's Printer for Ontario.
- Ontario Ministry of Natural Resources. 2002. Technical Rules River and Stream Systems: Flooding Hazard Limit. Ontario Ministry of Natural Resources Water Resources Section, Peterborough, Ontario.
- Ontario Ministry of the Environment. 2003. Technical Support Document for Ontario Drinking Water Standards, Objectives and Guidelines. Toronto, Ontario.
- Ontario Ministry of the Environment. 2003b. Stormwater management planning and design manual. Queen's Printer for Ontario, Toronto, Ontario.
- Ontario Ministry of the Environment. 2007. Assessment Report: Draft Guidance Module 7 -- Water Budget and Water Quantity Risk Assessment, Ontario Ministry of the Environment, Toronto, Ontario.
- Ontario Ministry of the Environment. 2007b. *Clean Water Act*. Preparing and Implementing Source Protection Plans. Fact Sheet. Ontario Ministry of the Environment, Toronto, Ontario.
- Ontario Ministry of the Environment. 2009. Technical Rules: Assessment Report, *Clean Water Act*, 2006. Ontario Ministry of the Environment, Toronto, Ontario.
- Ontario Ministry of Transportation. 2005. Road Salt Management [online]. Available from <http://www.mto.gov.on.ca/english/engineering/roadsalt.htm> [cited 28 March 2006].
- Pollution Probe. 2004. The Source Water Protection Primer. Pollution Probe, Toronto.
- Poole, G.C., and Berman, C.H. 2001. An ecological perspective on in-stream temperature: natural heat dynamics and mechanisms of human-caused thermal degradation. *Environmental Management* 27: 787-802.
- Power, G., Brown, R.S., and Imhof, J.G. Groundwater and Fish – insights from northern North America. *Hydrological Processes*, **13**:401-422.
- Richardson, A.H. 1944. The Ganaraska Watershed: A study in land use with recommendations for the rehabilitation of the area in the post-war period. Ontario Department of Planning and Development, Toronto, Ontario.

Roni, P., Weitkamp, L.A. and Scordino, J. 1999. Identification of essential fish habitat for salmon in the Pacific Northwest: initial efforts, information needs, and future direction. Pages 93-107 in L. Benaka, editor. Fish Habitat: essential fish habitat and rehabilitation. American Fisheries Society, Symposium 22. Bethesda, Maryland.

Sandwell Swan Wooster Incorporated. 1990. Lake Ontario Shoreline Management Study. In association with Beak Consultants Limited and EDA Collaborative. Submitted to the Central Lake Ontario Conservation Authority, Ganaraska Region Conservation Authority and Lower Trent Region Conservation Authority.

Schmid, H., and Rutherford, S. 1976. Out of the Mists, A history of Clarke Township. Orono Weekly Times, Orono.

Sharpley, A., Daniel, T.C., Sims, J.T., and Pote, D.H. 1996. Determining environmentally sound soil phosphorus levels. Journal of Soil and Water Conservation. 51(2):160-166.

Singer S.N., 1981. Evaluation of the Groundwater Responses Applied to the Bowmanville, Soper and Wilmot Creeks – IHD Representative Drainage Basin; Ministry of the Environment, Water resources Branch, Toronto.

Singer S.N., Cheng, C.K. and Scafe, M.G. 2003. The Hydrogeology of Southern Ontario, Second Edition. *In* Hydrogeology of Ontario Series – Report 1. Ministry of the Environment, Toronto, Ontario 199p.

Smith S.H. 1995. Early changes in the fish community of Lake Ontario. Great Lakes Fish. Comm. Tech. Rep.60.

Stanfield, L. (Editor). 2005. Ontario Stream Assessment Protocol Version 7, Fish and Wildlife Branch. Ontario Ministry of Natural Resources. Peterborough, Ontario. 256 pages.

Statistics Canada. 2007. 2006 Community Profiles [online]. Available from <http://www12.statcan.ca/english/profil01/CP01/Index.cfm?Lang=E> [cited August 2007].

Statistics Canada. 2008. 2006 Agriculture Community Profiles [online]. http://www26.statcan.ca:8080/AgrProfiles/cp06/TableList.action?prov=00&geog_id_a=350314024&tab_id=1&loccode=21657&placename=northumberland&placestart=0&geog_id=350314024&offname=Northumberland [cited 19 March 2008].

Steedman, R.J. 1986. Comparative analysis of stream degradation and rehabilitation in the Toronto area. PhD. Dissertation. University of Toronto.

Stoneman, C.L. and Jones, M.L. 1996. A simple method to classify stream thermal stability with single observation of daily maximum water and air temperatures. North American Journal of Fisheries Management. **16**:728-737.

Strategic Projection Incorporated. 2002. Municipality of Port Hope Population Growth Management Plan. Strategic Projection Incorporated.

Teti, P. 1998. The Effects of Forest Practices on stream Temperature, A Review of the Literature. B.C. Ministry of Forests.

Thornthwaite, C.W. and Mather, J.R. 1957. Instructions and tables for computing potential evapotranspiration and the water balance. Drexel Institute of Technology, Laboratory of Climatology. Publications in Climatology, 10(3), 145-311.

Transportation Association of Canada. 1999. Road salt and snow and ice control. Transportation Association of Canada Primer. Ottawa, Ontario.

United Nations Framework Convention on Climate Change. 2008. Essential Background. Available at http://unfccc.int/essential_background/items/2877.php.

United States Environment Protection Agency. 1976. Quality Criteria for Water. Washington D.C., United States of America.

Vannote, R.L., Minshall, G. W., Cummins, K.W., Sedell, J.R. and Cushing, C.E. 1980. The river continuum concept. Canadian Journal of Fisheries and Aquatic Science. **37**: 130-137

Webber, L.R., Morwick, F.F., Richards, N.R. 1991. Soil Survey of Durham County: Report No. 9 of the Ontario Soil Survey, 1946. Guelph, Ontario.

Wetzel, R.G. 2001. Limnology, Lake and River Ecosystems, Third Edition. Academic Press, California.

Widaatalla, M. and Peacock, M. 2007. Using streambed piezometers as a tool in the assessment of different catchment responses to precipitation and verification of mapping outputs. Ganaraska Region Conservation Authority, Port Hope. Paper published and presented in the 60th Canadian Geotechnical Conference and 8th Joint CGS/IAH-CNC Specialty Groundwater Conference – Ottawa 2007.

YPDT-CAMC. 2006. YPDT-CAMC Groundwater Study [online]. Available from URL:<http://www.ypdt-camc.ca/> [cited January 2008].

ACRONYMS AND GLOSSARY

ANSI	Area of Natural or Scientific Interest
AVI	Aquifer Vulnerability Index
CEQG	Canadian Environmental Quality Guidelines
CGCM	Canadian Global Climate Model
COSEWIC	Committee on the Status of Endangered Wildlife in Canada
COSSARO	Committee on the Status of Species at Risk in Ontario
CWQG	Canadian Water Quality Guidelines
DA	Dissemination Area
DEM	Digital Elevation Model
ELC	Ecological Land Classification
GCM	Global Climate Models
GIS	Global Information System
GRCA	Ganaraska Region Conservation Authority
GRWQMN	Ganaraska Water Quality Monitoring Network
NHIC	Natural Heritage Information Center
OFAT	Ontario Flow Assessment Technique
ODWS	Ontario Drinking Water Standard
OMAFRA	Ontario Ministry of Agriculture, Food and Rural Affairs
(O)MNR	Ontario Ministry of Natural Resources
(O)MOE	Ontario Ministry of the Environment
OSAP	Ontario Stream Assessment Protocol
PPS	Provincial Policy Statement
PTTW	Permit to Take Water
PWQO	Provincial Water Quality Objective
TCC SPR	Trent Conservation Coalition Source Protection Region
TSS	Total Suspended Solids
WWR	Water Well Record
YPDT-CAMC	York, Peel, Durham, Toronto, Conservation Authorities Moraine Coalition

Units

cfu/100ml	colony forming units per 100 milliliters
cms	cubic meters per second
g/L	grams per litre
L/D	litres per day
masl	meters above sea level
mg/L	milligrams/litre
µs/cm	micro siemens per centimetre
µg/L	micrograms per litre

Glossary

Anthropogenic: human induced or caused.⁷

Aquifer: A water bearing formation that is capable of transmitting water in sufficient quantities to serve as a source of water supply.⁴

Aquitard: A low-permeability unit that contains water but does not readily yield water to pumping wells. Aquitards can restrict contaminant movement.⁴

Artesian aquifer: An aquifer that contains water under pressure resulting in a hydrostatic head above ground level.⁴

Baseflow: Stream flow that results from groundwater seeping into a stream.⁴ Baseflow represents the discharge of groundwater to streams, supports flow in dry weather. The flow of streams composed solely of groundwater discharge.⁵

Bedrock: A general term for any consolidated rock.⁴

Coldwater Species/Habitat: Species with narrow thermal tolerance levels that are usually restricted to cold, highly oxygenated water. The temperature range for these species is from 10°C to 18°C.⁹

Community: An assemblage of interacting populations living in a particular locale.⁵

Confined aquifer: An aquifer that is bound above and below by deposits with significantly lower hydraulic conductivity.⁴

Confluence: The location where one stream flows into another.⁵

Discharge: The volume of water that passes a given location within a given period of time.¹

Drainage basin: The land area which contributes runoff to streams, rivers and lakes. Also called a watershed or catchment area.⁴

Evapo-transpiration: The combined loss of water to the atmosphere from land and water surfaces by evaporation and from plants by transpiration.⁴

Floodlines: Lines on a watershed map depicting regional flow conditions based on a specific historical event (i.e., Hurricane Hazel).¹²

Floodplain: The area, usually low lands adjoining a watercourse, which has been or may be subject to flooding hazards.¹²

Fluvial: Of or belonging to rivers.¹²

Gauging station: The site on a stream, lake or canal where surface water data is collected.⁴

GIS (Geographic Information System): A map based database management system, which uses spatial reference system for analysis and mapping purposes.⁴

Glaciofluvial: Pertaining to glacial meltwater streams and their sedimentary deposits.⁴

Glaciolacustrine: Pertaining to lakes adjacent to glaciers and fed by glacial meltwater.⁴

Gravel: Rock particles between 4 mm and 76 mm in diameter.⁴

Groundwater flow: The movement of water through the pore spaces of overburden material or through faults and fractures in bedrock.⁴

Groundwater model: A computer model in which groundwater flow is characterized by numerical equations.

Groundwater recharge: The inflow to a groundwater reservoir.⁴

Groundwater reservoir: An aquifer or aquifer system in which groundwater is stored.⁴

Groundwater storage: Groundwater stored in aquifers.⁴

Groundwater: Water occurring in the zone of saturation in an aquifer or soil.⁴

Hardness: A measure of the concentration of divalent cations in water, (mainly calcium and magnesium).⁴

Headwaters: The origins of streams and rivers.¹²

Hydrogeology: The study of water below the ground surface.¹²

Hydrology: The study of surface water flow systems.¹²

Hydrograph: A graph that shows water level as a function of time.⁴

Hydrologic cycle: The circulation of water in and on the earth and through the atmosphere through evaporation, condensation, precipitation, runoff, groundwater storage and seepage, and re-evaporation into the atmosphere.⁴

Hydrostrati-graphic unit: A formation, part of a formation, or group of formations with similar hydrologic characteristics that allow for grouping into aquifers and confining layers.⁴

Infiltration: The flow of water from the land surface into the subsurface.⁴

Irrigation: The controlled application of water through man-made systems to supply water requirements not satisfied by rainfall.⁴

Macroinvertebrates: organisms with no backbone that are greater than 2 mm in size. Generally refers to Benthic organisms such as insects and mollusks.⁶

Manure: The fecal and urinary matter produced by livestock and poultry.⁴

Nitrate (NO₃): An important plant nutrient and inorganic fertilizer. In water, the major sources of nitrates are septic tanks, feed lots and fertilizers.⁴

Non-point source contaminant: Contamination, which originates over large areas.⁴

Oak Ridges Moraine: A knobby ridge of sand deposited at the edge of a glacier by escaping meltwater; the Oak Ridges Moraine was formed by the Simcoe and Lake Ontario Ice Lobes meeting.³

Ontario Drinking Water Objectives: (ODWO): A set of regulations and guidelines developed by the Ontario government to help protect drinking water sources.⁵

Pool: A section of a stream where the water has a reduced velocity, often with water deeper than the surrounding areas.⁶

Pore space: The open space between mineral grains in a porous material.⁴

Provincial Water Quality Objectives (PWQO): numerical criteria that act as chemical and physical indicators for a satisfactory level of surface water quality to protect all forms of aquatic life.⁸

Potable water: Water that is fit to drink.⁴

Precambrian: The period of geologic time that precedes the Cambrian Period (2,500 to 4,500 million years ago).⁴

Quaternary: Geologic period spanning the last 1.8 million years and characterized by alternating glacial and interglacial climates. It is divided into the Pleistocene and Holocene epochs.¹¹

Recharge area: Areas where the water is absorbed into the ground and added to the zone of saturation.⁴

Riffle: A section of the stream with turbulent flow, usually with gravel, cobble or boulder bed material. Riffle sections are between pools and have faster moving water.⁶

Riparian Area: the land adjacent to a watercourse that is not normally submerged, which provides an area for vegetation to grown as a buffer to the land use alongside to the stream. It acts as a transitional area between aquatic and terrestrial environments, and is directly affected is affected by that body of water.⁶

River basin: The area drained by a river and its tributaries.⁴

Runoff: Water that reaches surface watercourses via overland flow.⁴

Sand: Sedimentary particles ranging from 0.074 mm to 4 mm in diameter.⁴

Saturated zone: A subsurface zone in which openings in a soil or rock formation are filled with water.⁴

Settlement Areas: Urban areas and rural settlement areas within municipalities (such as cities, towns villages and hamlets) where development is concentrated and a mix of land uses are present and have been designated in an official plan for development. Where there are no lands that have been designated, the settlement areas may be no larger than the area where the development is concentrated.¹⁰

Silt: Sedimentary particles ranging from 0.054 mm to 0.002 mm in diameter.⁴

Stream flow: The surface water discharge that occurs in a natural channel.⁴

Subwatershed: A geographical area defining a single drainage zone within the watershed.⁵

Surface runoff: Water flowing over the land surface in streams, ponds or marshes.⁴

Surface Water: Includes water bodies (lakes, wetlands, ponds, etc.), watercourses (rivers and streams), infiltration trenches and temporary ponds.²

Till: unsorted or very poorly sorted sediment deposited directly from glacier ice. Tills usually have a fine fraction - known as the matrix - with particles ranging from sand to clay size, and a coarse or clast fraction with pebble- to boulder-sized material.⁴

Topography: The physical features, especially the relief and contours of the land surface.^{4,2}

Transpiration: The process by which water vapour escapes from living plants, principally the leaves, and enters the atmosphere.⁴

Turbidity: The amount of solid particles that are suspended in water and produce a cloudy appearance.⁴

Unconfined aquifer: An aquifer whose upper boundary is the watertable.⁴

Unsaturated zone: A soil or rock zone above the watertable, extending to the ground surface, in which the pore spaces are only partially filled with water.⁴

Warm water Species/Habitat: Warm water habitat is classified as waters with temperatures above 25°C. Warm water species are tolerant to these water conditions.⁹

Water balance: The accounting of water input and output and changes in storage of the various components of the hydrologic cycle.⁴

Water budget: A summation of input, output, and net changes to a particular water resources system over a fixed period of time.⁴

Watertable: The top of the saturated zone in an unconfined aquifer.⁴

Watershed: The land within the confines of drainage divides.⁴

Zone of saturation: The space below the watertable in which the pore spaces are filled with water.⁴

Glossary Sources:

1. U.S. Geological Survey, Water Science Glossary of Terms, <http://ga.water.usgs.gov/edu/dictionary.html>
2. International Association of Hydrogeologist (IAH) – Hydrogeology Journal <http://www.iah.org/pubs.htm>
3. Chapman, L.J and Putnam, D.F. 1966. The Physiography of Southern Ontario; Ontario, Second Edition. University of Toronto Press, Toronto, Ontario.
4. Morrison Environmental Limited. 2004. Trent Conservation Coalition Municipal Groundwater Study, Paleozoic Area, Volume 1 - Aquifer Characterization. Morrison Environmental Limited.
5. Credit Valley Conservation. 2002. Integrated Watershed Monitoring Program. <http://www.creditvalleycons.com/bulletin/downloads/2001-MonitoringReport.pdf>
6. Grand River Conservation Authority, Parish Geomorphic, Trout Unlimited Canada, University of Guelph, and University of Waterloo. 2005. Evaluation of Ecological Flow Assessment Techniques for Selected Streams in the Grand River watershed. Draft.
7. Wikipedia Foundation Incorporated. 2006. Citing online sources: Wikipedia, The Free Encyclopedia [online]. Available from http://en.wikipedia.org/wiki/Main_Page [cited 23 August 2006].
8. MOE Water Management Policies Guidelines. 2004. <http://www.ene.gov.on.ca/envision/gp/3303e.htm> [cited 23 August 2006].
9. Ministry of Natural Resources. 2006. Citing online sources: Fish Biology and Identification [online], Available from <http://www.mnr.gov.on.ca/fishing/p956.html> [cited 23 August 2006].
10. Ministry of Public Infrastructure Renewal. 2006. Citing online sources: Places to Grow: Better Choices. Brighter Future [online], Available from http://www.pir.gov.on.ca/userfiles/page_attachments/Library/4/FPLAN-ENG-WEB-ALL.pdf?N_ID=4?N_ID=4 [cited 23 August 2006].
11. Eyles, N. 2002. Ontario Rocks. Fitzhenry and Whiteside, Markham, Ontario.
12. Toronto and Region Conservation. 2003. A Watershed Plan for Duffins Creek and Carruthers Creek. Toronto, Ontario.